








REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF



技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围(Temperature range): $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): $\leq 0.03\Omega$.
5. 绝缘电阻(Insulation resistance): $\geq 500M\Omega$



CKT	DIMA	DIMB	DIMC	CKT	DIMA	DIMB	DIMC
4	1.50	2.52	5.54	33	16.00	17.02	20.04
5	2.00	3.02	6.04	34	16.50	17.52	20.54
6	2.50	3.52	6.54	35	17.00	18.02	21.04
7	3.00	4.02	7.04	36	17.50	18.52	21.54
8	3.50	4.52	7.54	37	18.00	19.02	22.04
9	4.00	5.02	8.04	38	18.50	19.52	22.54
10	4.50	5.52	8.54	39	19.00	20.02	23.04
11	5.00	6.02	9.04	40	19.50	20.52	23.54
12	5.50	6.52	9.54	41	20.00	21.02	24.04
13	6.00	7.02	10.04	42	20.50	21.52	24.54
14	6.50	7.52	10.54	43	21.00	22.02	25.04
15	7.00	8.02	11.04	44	21.50	22.52	25.54
16	7.50	8.52	11.54	45	22.00	23.02	26.04
17	8.00	9.02	12.04	46	22.50	23.52	26.54
18	8.50	9.52	12.54	47	23.00	24.02	27.04
19	9.00	10.02	13.04	48	23.50	24.52	27.54
20	9.50	10.52	13.54	49	24.00	25.02	28.04
21	10.00	11.02	14.04	50	24.50	25.52	28.54
22	10.50	11.52	14.54	51	25.00	26.02	29.04
23	11.00	12.02	15.04	52	25.50	26.52	29.54
24	11.50	12.52	15.54	53	26.00	27.02	30.04
25	12.00	13.02	16.04	54	26.50	27.52	30.54
26	12.50	13.52	16.54	55	27.00	28.02	31.04
27	13.00	14.02	17.04	56	27.50	28.52	31.54
28	13.50	14.52	17.54	57	28.00	29.02	32.04
29	14.00	15.02	18.04	58	28.50	29.52	32.54
30	14.50	15.52	18.54	59	29.00	30.02	33.04
31	15.00	16.02	19.04	60	29.50	30.52	33.54
32	15.50	16.52	19.54	80	39.50	40.52	43.54

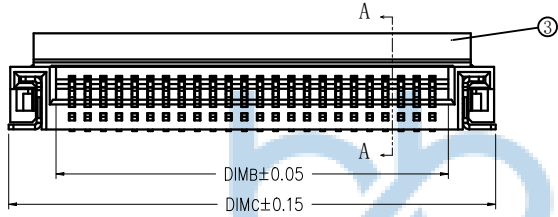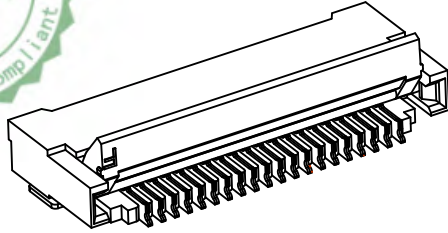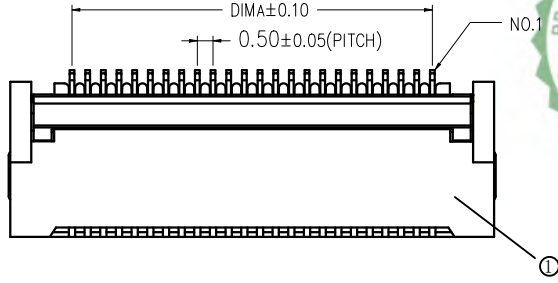

此处浇口沉台, 因模具结构原因, 一些有, 一些没, 因pin位过多, 不一一列举

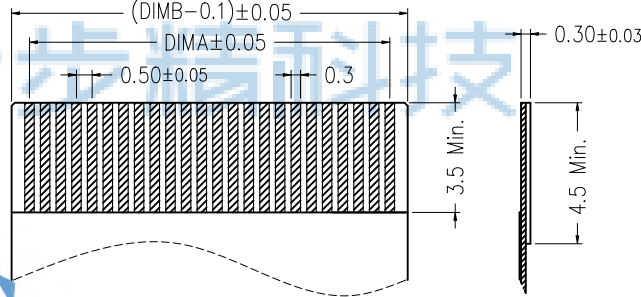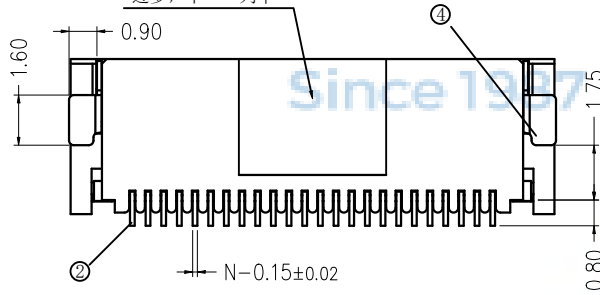



适用扁平线(Applicable Flat Cable)

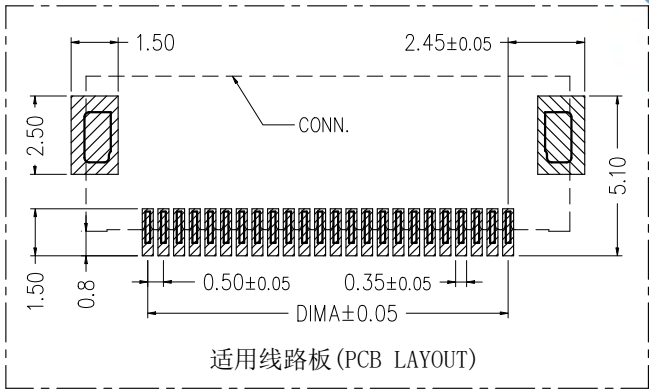


序号 (NO.)	品名 (Name)	材质 (Material)
①	0.5后压胶芯(H=2.0) 0.5 PH Backflip Type Housing (H=2.0)	LCP UL94V-0 本色 Natural
②	0.5后压端子(H=2.0) 0.5 PH Backflip Type Terminal (H=2.0)	铜合金/表面镀金 Copper Alloy/ Gold Plating
③	0.5后压后盖(H=2.0) 0.5 PH Backflip Type Actuator (H=2.0)	LCP UL94V-0 黑色 Black
④	0.5后压焊片(H=2.0) 0.5 PH Backflip Type Fitting Nail (H=2.0)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	PDWG.NO: 0456-1
--	-----------------

深圳市步步精科技有限公司	
NAME:	FPC 0.5-7P 后翻式 H=2.0 端子点镀金 编带
APPD.	JM_Zheng
CHKD.	LYX
DR.	SGF
PJ. NO.:	130-221-070001-X3G
SIZE: A4	DRW NO.:
FINISH: SEE NOTES	MAT'L.: SEE NOTES
SCALE: N/A	REV.: A0
UNIT: mm	PAGE: 1/2

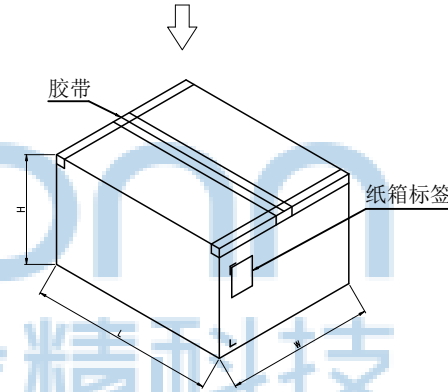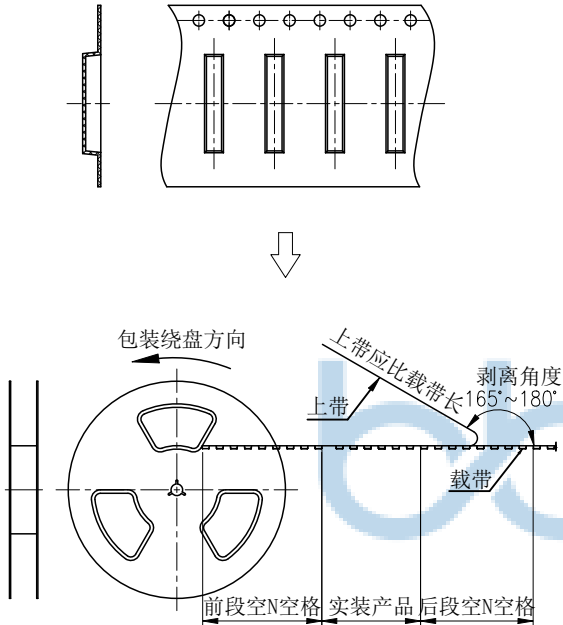

纸箱规格: W345*L345*H230MM

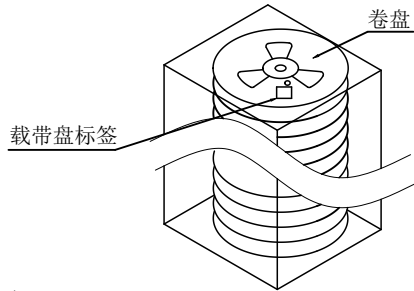

备注:

- 1、包装数量: 1500/PCS/卷, 10卷/箱.
- 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装.
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: FPC 0.5-7P 后翻式 H=2.0 端子点镀金 编带	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: $\pm 3'$ X*: $\pm 2'$ XX*: $\pm 1'$		PJ. NO.: 130-221-070001-X3G	
APPD.		JM_Zheng		SIZE: A4 DRW NO.:	
CHKD.		LYX		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0456-1		DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	