
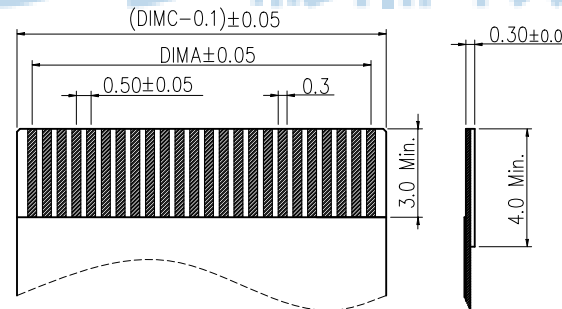
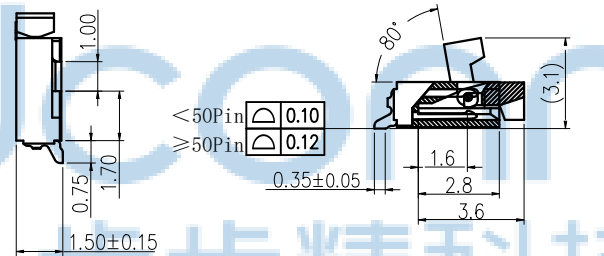
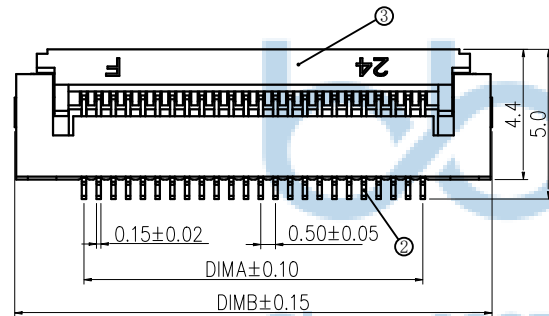
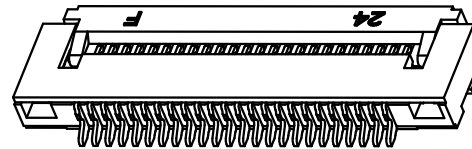


REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF


技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
3. 额定电压: 50V, AC/DC(等效).
4. 接触电阻: $\leq 0.03\Omega$.
5. 绝缘电阻: $\geq 500\Omega$

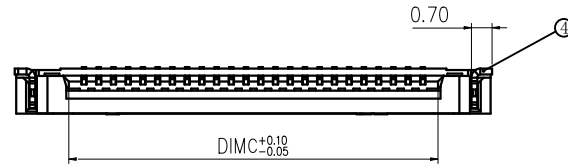

适用扁平线 (Applicable Flat Cable)

CKT	DIMA	DIMB	DIMC	CKT	DIMA	DIMB	DIMC
4	1.50	6.20	2.53	33	16.00	20.70	17.03
5	2.00	6.70	3.03	34	16.50	21.20	17.53
6	2.50	7.20	3.53	35	17.00	21.70	18.03
7	3.00	7.70	4.03	36	17.50	22.20	18.53
8	3.50	8.20	4.53	37	18.00	22.70	19.03
9	4.00	8.70	5.03	38	18.50	23.20	19.53
10	4.50	9.20	5.53	39	19.00	23.70	20.03
11	5.00	9.70	6.03	40	19.50	24.20	20.53
12	5.50	10.20	6.53	41	20.00	24.70	21.03
13	6.00	10.70	7.03	42	20.50	25.20	21.53
14	6.50	11.20	7.53	43	21.00	25.70	22.03
15	7.00	11.70	8.03	44	21.50	26.20	22.53
16	7.50	12.20	8.53	45	22.00	26.70	23.03
17	8.00	12.70	9.03	46	22.50	27.20	23.53
18	8.50	13.20	9.53	47	23.00	27.70	24.03
19	9.00	13.70	10.03	48	23.50	28.20	24.53
20	9.50	14.20	10.53	49	24.00	28.70	25.03
21	10.00	14.70	11.03	50	24.50	29.20	25.53
22	10.50	15.20	11.53	51	25.00	29.70	26.03
23	11.00	15.70	12.03	52	25.50	30.20	26.53
24	11.50	16.20	12.53	53	26.00	30.70	27.03
25	12.00	16.70	13.03	54	26.50	31.20	27.53
26	12.50	17.20	13.53	55	27.00	31.70	28.03
27	13.00	17.70	14.03	56	27.50	32.20	28.53
28	13.50	18.20	14.53	57	28.00	32.70	29.03
29	14.00	18.70	15.03	58	28.50	33.20	29.53
30	14.50	19.20	15.53	59	29.00	33.70	30.03
31	15.00	19.70	16.03	60	29.50	34.20	30.53
32	15.50	20.20	16.53				

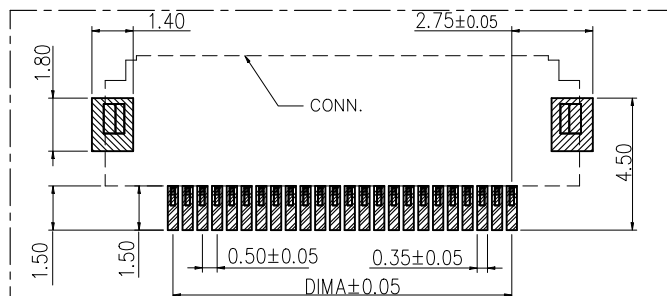

适用线路板 (PCB LAYOUT)

序号	品名	材质
①	胶芯	LCP UL94V-0 本色
②	端子	铜合金/镀金
③	后盖	LCP UL94V-0 黑色
④	焊片	铜合金/表面镀金




THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0456-1

深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' .X': ±2' .XX': ±1'	
NAME:	FPC 0.5-20P 翻盖下接 H=1.5 点镀金 编带		
APPD	JM_Zheng	PJ NO:	130-224-200002-X3G
CHKD	LYX	SIZE:A4	DRW NO:
DR	SGF	FINISH:SEE NOTES	MAT'L:SEE NOTES
		SCALE:N/A	REV: A0
		UNIT:mm	PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

NOTE(注):


1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX:1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: BLACK ANTISTATIC PS.
(载带材料: 黑色防静电PS.)
5. THICKNESS: $0.30 \pm 0.05\text{mm}$. (载带厚度: $0.30 \pm 0.05\text{mm}$.)
6. PACKING LENGHT PER REEL: 33 METERS. (每卷包装长度: 33米.)
7. COMPONENT LOAD PER REEL: 4000 PCS. (每卷包装数量: 4000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

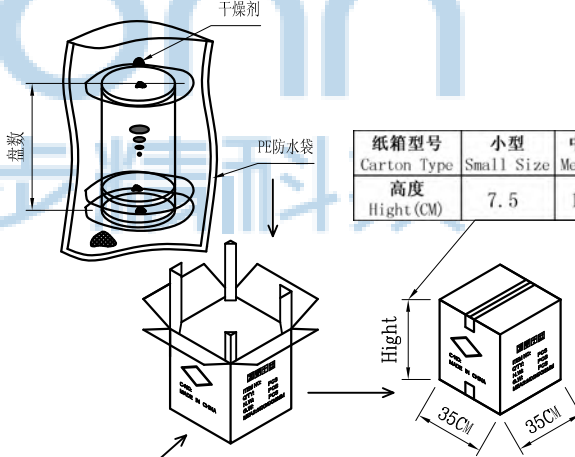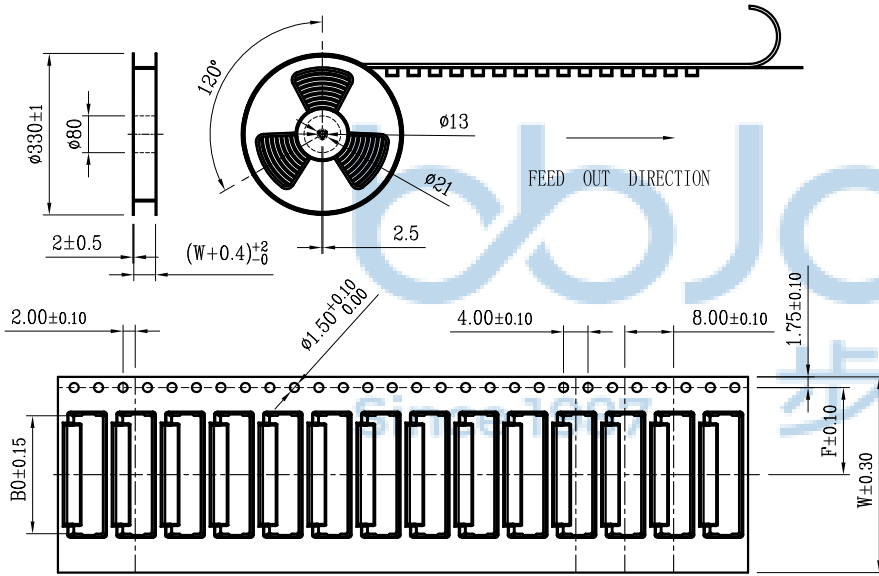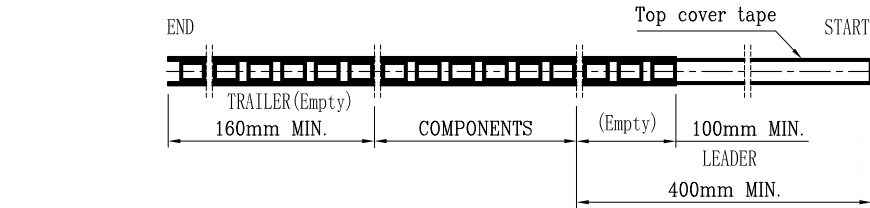

纸箱型号	小型	中型	标准型
Carton Type	Small Size	Medium	Standard
高度	7.5	15	32
Hight (CM)			

CKT (0.5mm pitch)	B0	W	F
4	6.30	16	7.5
5	6.80		
6	7.30		
7	7.80		
8	8.30		
9	8.80		
10	9.30		
11	9.80		
12	10.30		
13	10.80		
14	11.30	24	11.5
15	11.80		
16	12.30		
17	12.80		
18	13.30		
19	13.80		
20	14.30		
21	14.80		
22	15.30		
23	15.80		
24	16.30		

CKT (0.5mm pitch)	W	PCS/REEL	REEL/CARTON	SUM (PCS)
4	16	4000	14	56000
5		4000	14	56000
6		4000	14	56000
7		4000	14	56000
8		4000	14	56000
9		4000	14	56000
10		4000	14	56000
11		4000	10	40000
12		4000	10	40000
13		4000	10	40000
14	24	4000	10	40000
15		4000	10	40000
16		4000	10	40000
17		4000	10	40000
18		4000	10	40000
19		4000	10	40000
20		4000	10	40000
21		4000	10	40000
22		4000	10	40000
23		4000	10	40000
24		4000	10	40000



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR SGF

NAME:
FPC 0.5-20P 翻盖下接 H=1.5 点镀金 编带

PJ NO: 130-224-200002-X3G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV: A0 UNIT:mm PAGE: 2/2