






| REV | ECN NO | CONTENT         | DATE | ENGINEER |
|-----|--------|-----------------|------|----------|
| AO  |        | INITIAL RELEASE | /    | SGF      |

技术指标:


1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围:  $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$ 。
3. 额定电压: 50V, AC/DC(等效)。
4. 接触电阻:  $\leq 0.03\Omega$ 。
5. 绝缘电阻:  $\geq 500\Omega$ 。



| CKT | DIMA  | DIMB  | DIMC  | CKT | DIMA  | DIMB  | DIMC  |
|-----|-------|-------|-------|-----|-------|-------|-------|
| 4   | 1.50  | 6.20  | 2.53  | 33  | 16.00 | 20.70 | 17.03 |
| 5   | 2.00  | 6.70  | 3.03  | 34  | 16.50 | 21.20 | 17.53 |
| 6   | 2.50  | 7.20  | 3.53  | 35  | 17.00 | 21.70 | 18.03 |
| 7   | 3.00  | 7.70  | 4.03  | 36  | 17.50 | 22.20 | 18.53 |
| 8   | 3.50  | 8.20  | 4.53  | 37  | 18.00 | 22.70 | 19.03 |
| 9   | 4.00  | 8.70  | 5.03  | 38  | 18.50 | 23.20 | 19.53 |
| 10  | 4.50  | 9.20  | 5.53  | 39  | 19.00 | 23.70 | 20.03 |
| 11  | 5.00  | 9.70  | 6.03  | 40  | 19.50 | 24.20 | 20.53 |
| 12  | 5.50  | 10.20 | 6.53  | 41  | 20.00 | 24.70 | 21.03 |
| 13  | 6.00  | 10.70 | 7.03  | 42  | 20.50 | 25.20 | 21.53 |
| 14  | 6.50  | 11.20 | 7.53  | 43  | 21.00 | 25.70 | 22.03 |
| 15  | 7.00  | 11.70 | 8.03  | 44  | 21.50 | 26.20 | 22.53 |
| 16  | 7.50  | 12.20 | 8.53  | 45  | 22.00 | 26.70 | 23.03 |
| 17  | 8.00  | 12.70 | 9.03  | 46  | 22.50 | 27.20 | 23.53 |
| 18  | 8.50  | 13.20 | 9.53  | 47  | 23.00 | 27.70 | 24.03 |
| 19  | 9.00  | 13.70 | 10.03 | 48  | 23.50 | 28.20 | 24.53 |
| 20  | 9.50  | 14.20 | 10.53 | 49  | 24.00 | 28.70 | 25.03 |
| 21  | 10.00 | 14.70 | 11.03 | 50  | 24.50 | 29.20 | 25.53 |
| 22  | 10.50 | 15.20 | 11.53 | 51  | 25.00 | 29.70 | 26.03 |
| 23  | 11.00 | 15.70 | 12.03 | 52  | 25.50 | 30.20 | 26.53 |
| 24  | 11.50 | 16.20 | 12.53 | 53  | 26.00 | 30.70 | 27.03 |
| 25  | 12.00 | 16.70 | 13.03 | 54  | 26.50 | 31.20 | 27.53 |
| 26  | 12.50 | 17.20 | 13.53 | 55  | 27.00 | 31.70 | 28.03 |
| 27  | 13.00 | 17.70 | 14.03 | 56  | 27.50 | 32.20 | 28.53 |
| 28  | 13.50 | 18.20 | 14.53 | 57  | 28.00 | 32.70 | 29.03 |
| 29  | 14.00 | 18.70 | 15.03 | 58  | 28.50 | 33.20 | 29.53 |
| 30  | 14.50 | 19.20 | 15.53 | 59  | 29.00 | 33.70 | 30.03 |
| 31  | 15.00 | 19.70 | 16.03 | 60  | 29.50 | 34.20 | 30.53 |
| 32  | 15.50 | 20.20 | 16.53 |     |       |       |       |

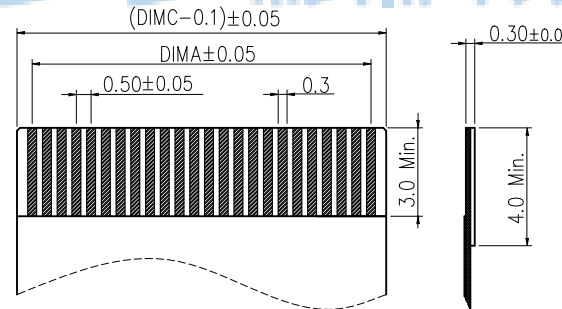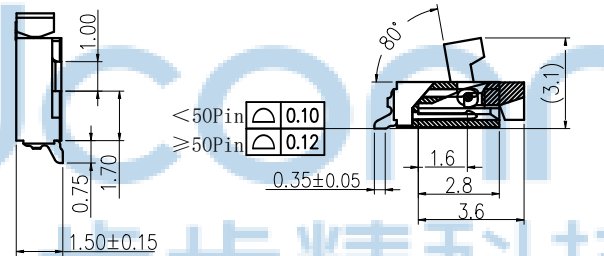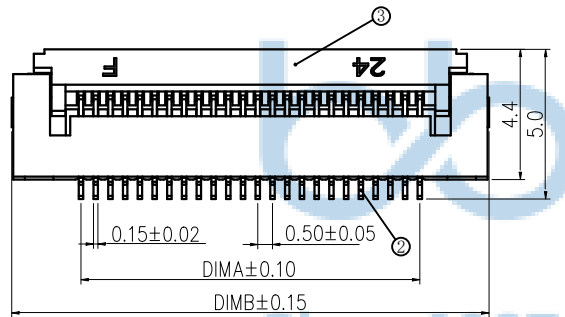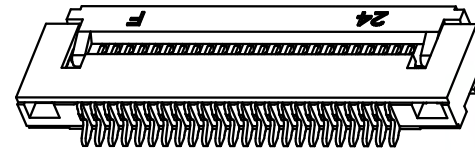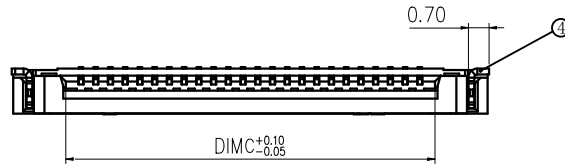

适用扁平线 (Applicable Flat Cable)

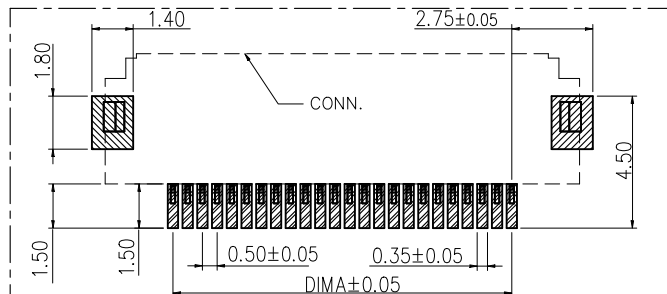

适用线路板 (PCB LAYOUT)

| 序号 | 品名 | 材质             |
|----|----|----------------|
| ①  | 胶芯 | LCP UL94V-0 本色 |
| ②  | 端子 | 铜合金/镀金         |
| ③  | 后盖 | LCP UL94V-0 黑色 |
| ④  | 焊片 | 铜合金/表面镀金       |




THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
PRIOR WRITTEN PERMISSION.  
PDWG NO: 0456-1

|                                     |  |
|-------------------------------------|--|
| 深圳市步步精科技有限公司                        |  |
| NAME: FPC 0.5-40P 翻盖下接 H=1.5 点镀金 编带 |  |
| PJ NO: 130-224-400001-X3G           |  |
| SIZE:A4 DRW NO:                     |  |
| FINISH:SEE NOTES MAT'L:SEE NOTES    |  |
| SCALE:N/A REV: A0 UNIT:mm PAGE: 1/2 |  |

| REV. | ECN NO | CONTENT         | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0   |        | INITIAL RELEASE | /    | SGF      |

NOTE(注):


1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2\text{mm}$ .  
(10片孔距累积公差 $\pm 0.2\text{mm}$ .)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.  
(载带拱/弧形MAX:1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.  
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: BLACK ANTISTATIC PS.  
(载带材料: 黑色防静电PS.)
5. THICKNESS:  $0.30 \pm 0.05\text{mm}$ . (载带厚度:  $0.30 \pm 0.05\text{mm}$ .)
6. PACKING LENGHT PER REEL: 33 METERS. (每卷包装长度: 33米.)
7. COMPONENT LOAD PER REEL: 4000 PCS. (每卷包装数量: 4000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

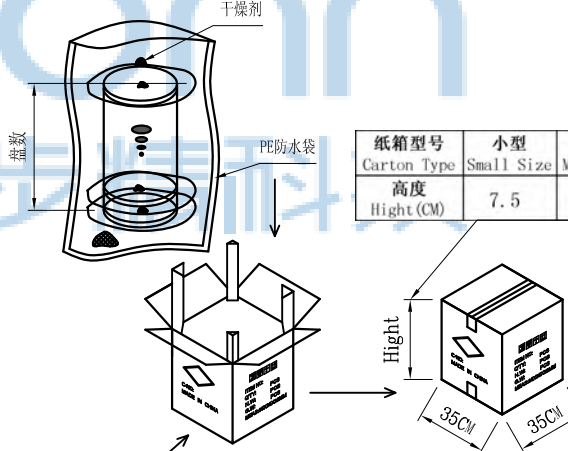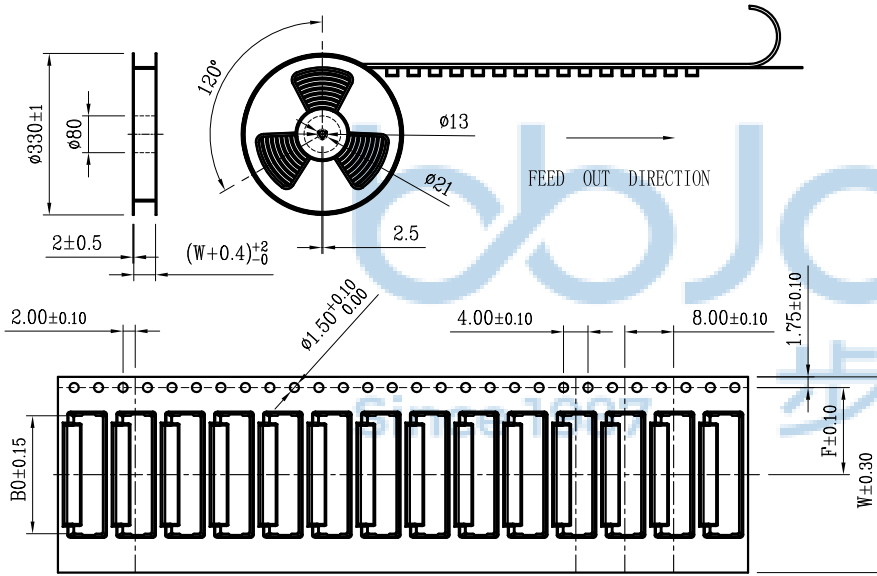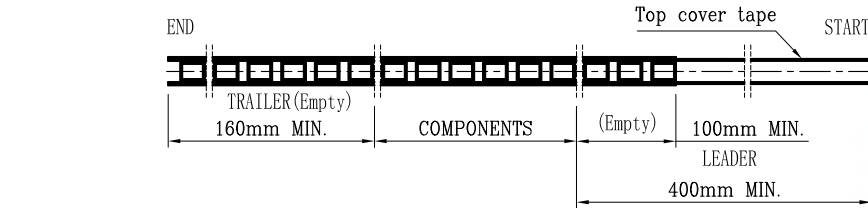

| 纸箱型号        | 小型         | 中型     | 标准型      |
|-------------|------------|--------|----------|
| Carton Type | Small Size | Medium | Standard |
| 高度          | 7.5        | 15     | 32       |
| Hight (CM)  |            |        |          |

| CKT<br>(0.5mm pitch) | B0    | W  | F    |
|----------------------|-------|----|------|
| 4                    | 6.30  | 16 | 7.5  |
| 5                    | 6.80  |    |      |
| 6                    | 7.30  |    |      |
| 7                    | 7.80  |    |      |
| 8                    | 8.30  |    |      |
| 9                    | 8.80  |    |      |
| 10                   | 9.30  |    |      |
| 11                   | 9.80  |    |      |
| 12                   | 10.30 | 24 | 11.5 |
| 13                   | 10.80 |    |      |
| 14                   | 11.30 |    |      |
| 15                   | 11.80 |    |      |
| 16                   | 12.30 |    |      |
| 17                   | 12.80 |    |      |
| 18                   | 13.30 |    |      |
| 19                   | 13.80 |    |      |
| 20                   | 14.30 |    |      |
| 21                   | 14.80 |    |      |
| 22                   | 15.30 |    |      |
| 23                   | 15.80 |    |      |
| 24                   | 16.30 |    |      |

| CKT<br>(0.5mm pitch) | W  | PCS/REEL | REEL/CARTON | SUM (PCS) |
|----------------------|----|----------|-------------|-----------|
| 4                    | 16 | 4000     | 14          | 56000     |
| 5                    |    | 4000     | 14          | 56000     |
| 6                    |    | 4000     | 14          | 56000     |
| 7                    |    | 4000     | 14          | 56000     |
| 8                    |    | 4000     | 14          | 56000     |
| 9                    |    | 4000     | 14          | 56000     |
| 10                   |    | 4000     | 14          | 56000     |
| 11                   |    | 4000     | 10          | 40000     |
| 12                   | 24 | 4000     | 10          | 40000     |
| 13                   |    | 4000     | 10          | 40000     |
| 14                   |    | 4000     | 10          | 40000     |
| 15                   |    | 4000     | 10          | 40000     |
| 16                   |    | 4000     | 10          | 40000     |
| 17                   |    | 4000     | 10          | 40000     |
| 18                   |    | 4000     | 10          | 40000     |
| 19                   |    | 4000     | 10          | 40000     |
| 20                   |    | 4000     | 10          | 40000     |
| 21                   |    | 4000     | 10          | 40000     |
| 22                   |    | 4000     | 10          | 40000     |
| 23                   |    | 4000     | 10          | 40000     |
| 24                   |    | 4000     | 10          | 40000     |



THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1



深圳市步步精科技有限公司

.X:  $\pm 0.38$  X':  $\pm 3'$   
.XX:  $\pm 0.25$  .X':  $\pm 2'$   
.XXX:  $\pm 0.13$  .XX':  $\pm 1'$

APPD JM\_Zheng  
CHKD LYX

DR SGF

NAME:  
FPC 0.5-40P 翻盖下接 H=1.5 点镀金 编带  
PJ NO: 130-224-400001-X3G  
SIZE:A4 DRW NO:  
FINISH:SEE NOTES MAT'L:SEE NOTES  
SCALE:N/A REV: A0 UNIT:mm PAGE: 2/2