

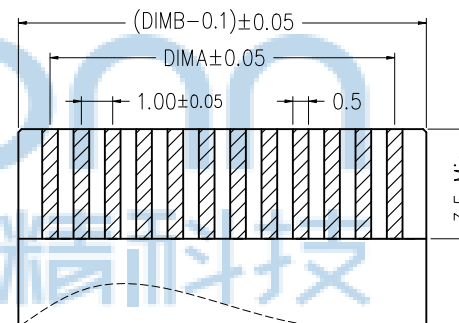



技术参数:




- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
- 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$ 。
- 额定电压: 50V, AC/DC(等效)。
- 接触电阻: $\leq 0.03\Omega$ 。
- 绝缘电阻: $\geq 500\text{M}\Omega$ 。

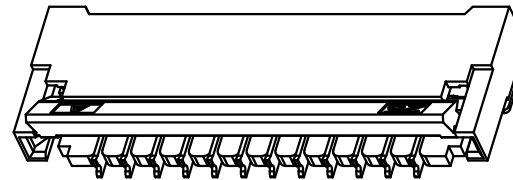

CKT	DIMA	DIMB	DIMC
4	3.00	5.02	8.04
5	4.00	6.02	9.04
6	5.00	7.02	10.04
7	6.00	8.02	11.04
8	7.00	9.02	12.04
9	8.00	10.02	13.04
10	9.00	11.02	14.04
11	10.00	12.02	15.04
12	11.00	13.02	16.04
13	12.00	14.02	17.04
14	13.00	15.02	18.04
15	14.00	16.02	19.04
16	15.00	17.02	20.04
17	16.00	18.02	21.04
18	17.00	19.02	22.04
19	18.00	20.02	23.04
20	19.00	21.02	24.04
21	20.00	22.02	25.04
22	21.00	23.02	26.04
23	22.00	24.02	27.04
24	23.00	25.02	28.04
25	24.00	26.02	29.04
26	25.00	27.02	30.04
27	26.00	28.02	31.04
28	27.00	29.02	32.04
29	28.00	30.02	33.04
30	29.00	31.02	34.04

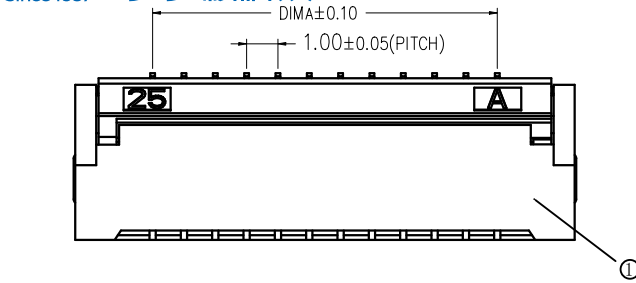

适用扁平线(Applicable Flat Cable)

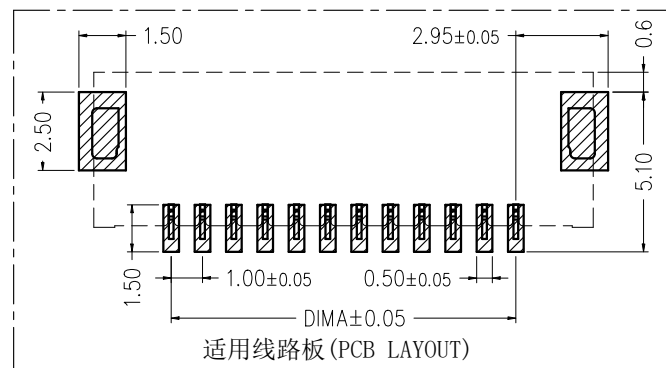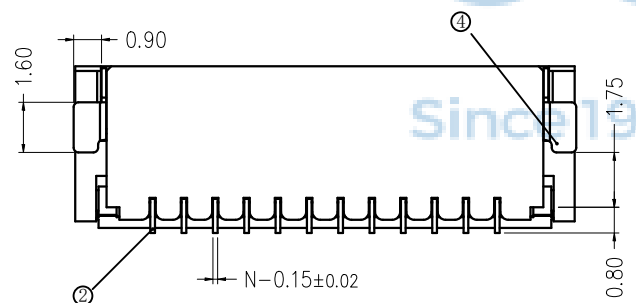

适用线路板(PCB LAYOUT)



序号	品名	材质
①	1.0后压胶芯(H2.0)	LCP UL94V-0 本色
②	0.5后压端子(H2.0)	铜合金/表面镀锡 镀金
③	0.5后压后盖(H2.0)	LCP UL94V-0 黑色
④	0.5后压焊片(H2.0)	铜合金/表面镀锡

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0456-1

深圳市步步精科技有限公司




NAME: FPC 1.0-10P 后翻式 H=2.0 镀金 编带

PJ NO: 130-241-100002-X3G


SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

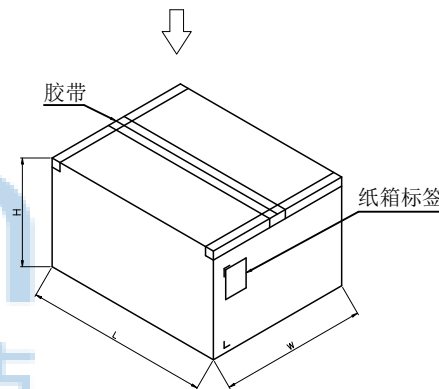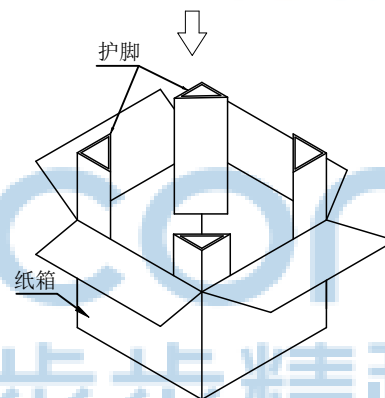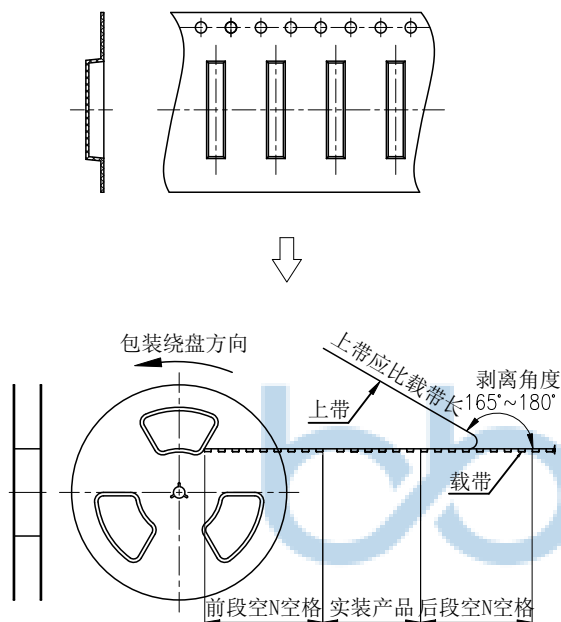

纸箱规格: W345*L345*H350MM

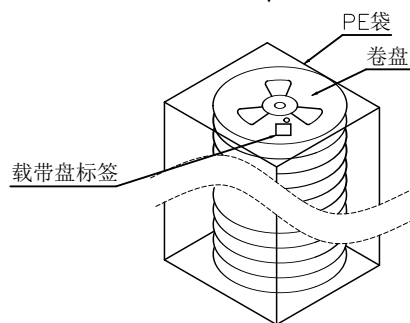

备注:

- 1、包装数量: 1500/PCS/卷, 10卷/箱。
- 2、包装袋长度: 每卷前后各空10~20个空格, 中间包装。
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.	 深圳市步步精科技有限公司		
	.X: ±0.38 X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: FPC 1.0-10P 后翻式 H=2.0 镀金 编带
	APPD	JM_Zheng	 PJ NO: 130-241-100002-X3G
	CHKD	LYX	SIZE:A4 DRW NO:
	PDWG NO: 0456-1	DR	GZY