

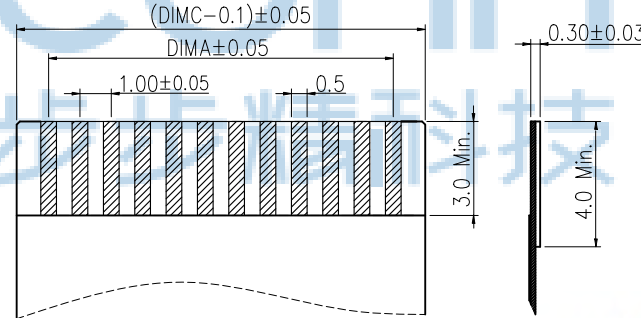
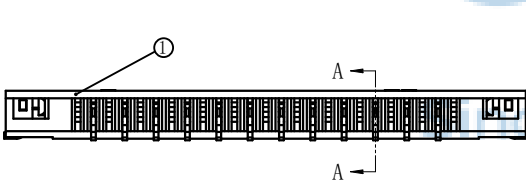
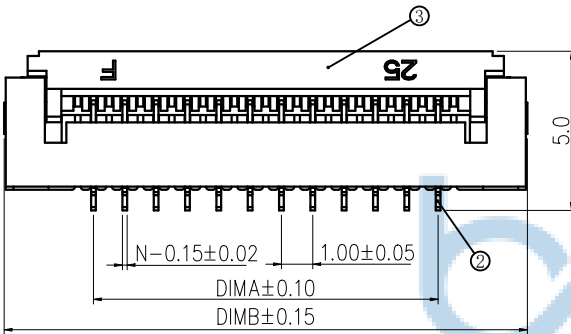
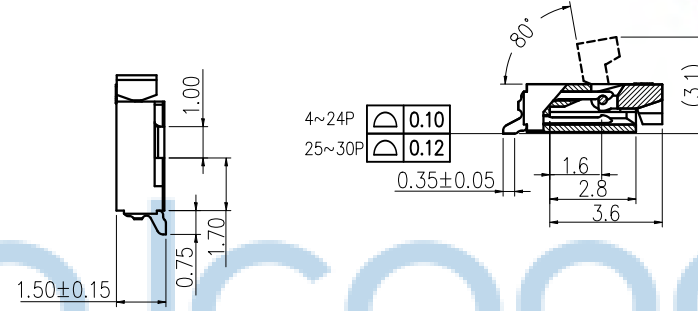


技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
3. 额定电压: 50V, AC/DC(等效).
4. 接触电阻: $\leq 0.03\Omega$.
5. 绝缘电阻: $\geq 500\text{M}\Omega$

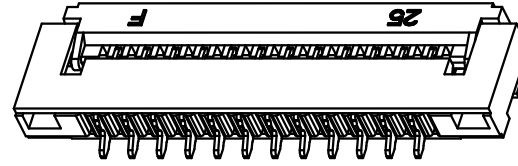

CKT	DIMA	DIMB	DIMC
4	3.00	8.70	5.03
5	4.00	9.70	6.03
6	5.00	10.70	7.03
7	6.00	11.70	8.03
8	7.00	12.70	9.03
9	8.00	13.70	10.03
10	9.00	14.70	11.03
11	10.00	15.70	12.03
12	11.00	16.70	13.03
13	12.00	17.70	14.03
14	13.00	18.70	15.03
15	14.00	19.70	16.03
16	15.00	20.70	17.03
17	16.00	21.70	18.03
18	17.00	22.70	19.03
19	18.00	23.70	20.03
20	19.00	24.70	21.03
21	20.00	25.70	22.03
22	21.00	26.70	23.03
23	22.00	27.70	24.03
24	23.00	28.70	25.03
25	24.00	29.70	26.03
26	25.00	30.70	27.03
27	26.00	31.70	28.03
28	27.00	32.70	29.03
29	28.00	33.70	30.03
30	29.00	34.70	31.03

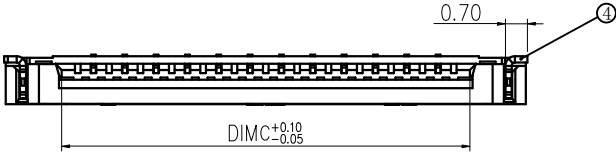

适用扁平线(Applicable Flat Cable)



序号	品名	材质
①	胶芯	LCP UL94V-0 本色
②	端子	铜合金/表面镀锡
③	后盖	LCP UL94V-0 黑色
④	焊片	铜合金/表面镀锡

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0456-1

深圳市步步精科技有限公司

NAME: FPC 1.0-6P 翻盖下接 H=1.5 编带

PJ NO: 130-244-060002-X3G

SIZE:A4 DRW NO:





FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV: A0 UNIT:mm PAGE: 1/2

APPD JM_Zheng

CHKD LYX

DR SGF

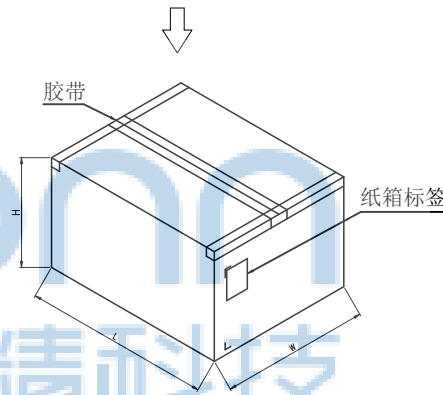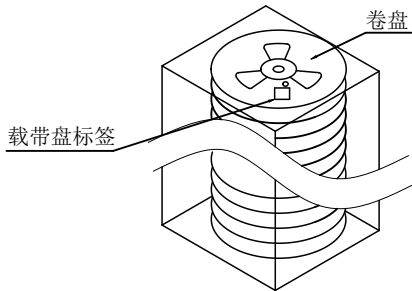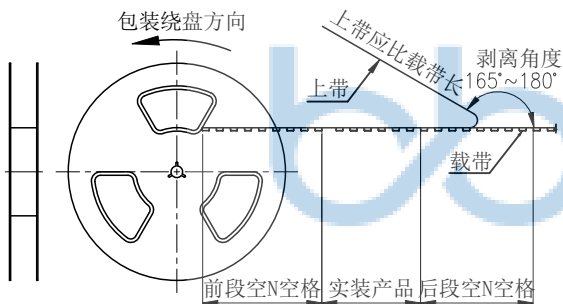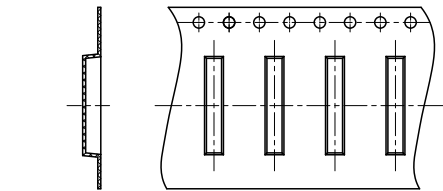

纸箱规格: W345*L345*H230MM



备注:

- 1、包装数量: 4000/PCS/卷, 10卷/箱.
- 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装.
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯.

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng
CHKD LYX

DR SGF

NAME:
FPC 1.0-6P 翻盖下接 H=1.5 编带

PJ NO: 130-244-060002-X3G
SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV: A0 UNIT:mm PAGE: 2/2