

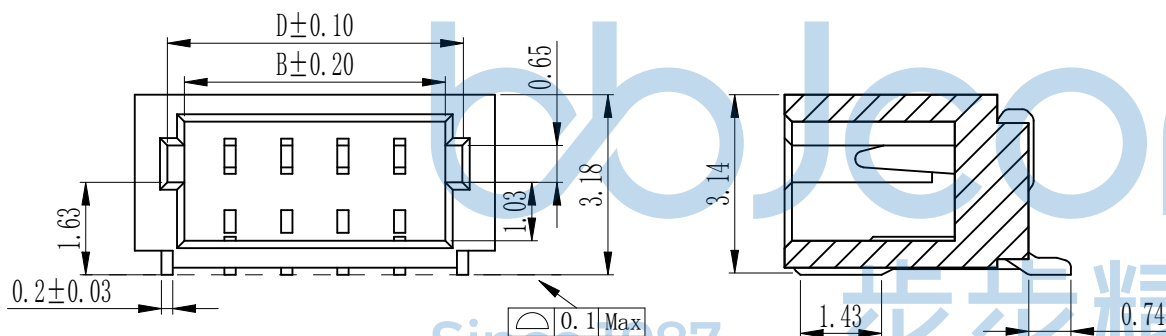

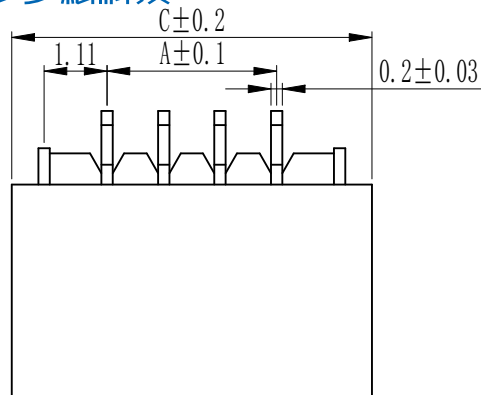


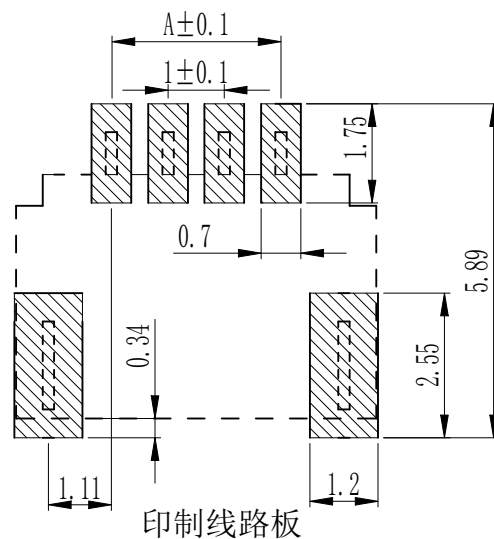


截面 A-A

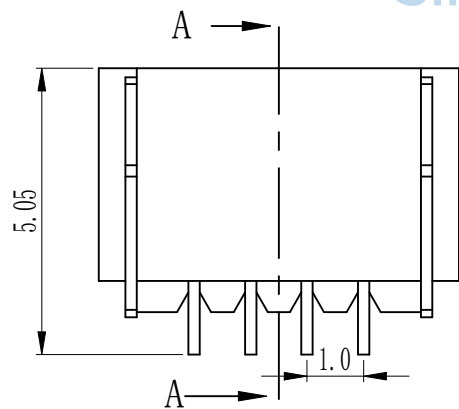

1. 技术参数:

- 1.1 额定电流: 0.5A AC/DC
- 1.2 额定电压: 50V
- 1.3 耐电压: 500V ACminute
- 1.4 接触电阻: 20mΩ MAX
- 1.5 绝缘电阻: 100MΩ MIN
- 2. 工作温度: -25℃~+85℃

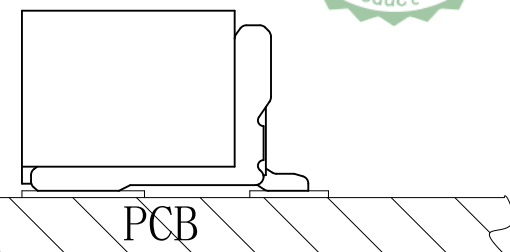

Circuits	Dimensions (mm)				Circuits	Dimensions (mm)			
	A	B	C	D		A	B	C	D
1.0WT-2P	1.0	2.6	4.30	3.20	1.0WT-12P	11.0	12.6	14.30	13.20
1.0WT-3P	2.0	3.6	5.30	4.20	1.0WT-13P	12.0	13.6	15.30	14.20
1.0WT-4P	3.0	4.6	6.30	5.20	1.0WT-14P	13.0	14.6	16.30	15.20
1.0WT-5P	4.0	5.6	7.30	6.20	1.0WT-15P	14.0	15.6	17.30	16.20
1.0WT-6P	5.0	6.6	8.30	7.20	1.0WT-16P	15.0	16.6	18.30	17.20
1.0WT-7P	6.0	7.6	9.30	8.20					
1.0WT-8P	7.0	8.6	10.30	9.20					
1.0WT-9P	8.0	9.6	11.30	10.20					
1.0WT-10P	9.0	10.6	12.30	11.20					
1.0WT-11P	10.0	11.6	13.30	12.20					

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X': ±3'
.X': ±2'
.XX': ±1'

NAME: 针座 1.0-16P 卧贴 米黄色

APPD. JM_Zheng

CHKD. LYX

DR. TSP

PDWG.NO: 0013-1




PJ. NO.: WT.10.61-73-H011

SIZE: A4 DRW NO.:



FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

NO	物料名称	规格型号	数量(PCS)	材质	镀涂
①	基座	1.0	1	LCPE130i	本色
②	焊片	1.0	2	磷铜	锡
③	插针	1.0	2~20	磷铜	锡

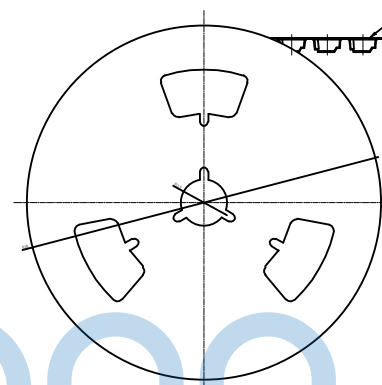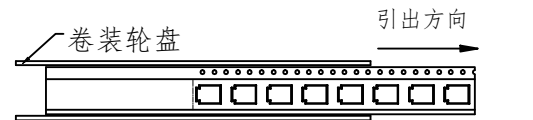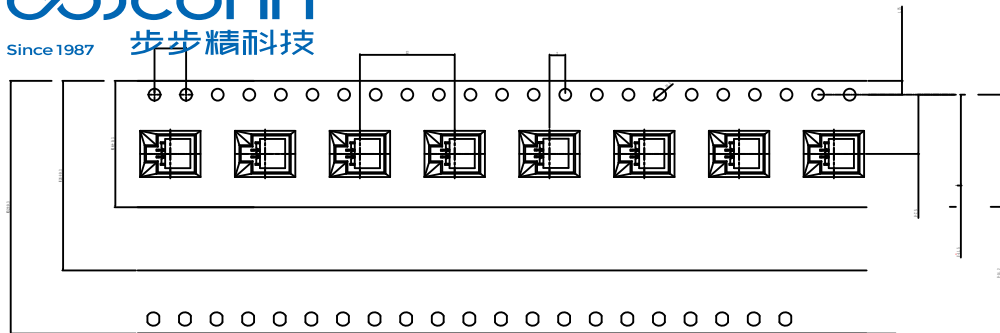

Circuits	载带尺寸		
	W	B0	F
1. OWT-02	16.0	4.65	7.50
1. OWT-03	16.0	5.65	7.50
1. OWT-04	16.0	7.65	7.50
1. OWT-05	16.0	8.65	7.50
1. OWT-06	16.0	9.65	7.50
1. OWT-07	16.0	10.65	7.50
1. OWT-08	24.0	11.65	11.5
1. OWT-09	24.0	12.65	11.5
1. OWT-10	24.0	13.65	11.5
1. OWT-11	24.0	14.65	11.5
1. OWT-12	24.0	15.65	11.5
1. OWT-13	24.0	16.65	11.5
1. OWT-14	32.0	17.65	14.2
1. OWT-15	32.0	18.65	14.2
1. OWT-16	32.0	19.65	14.2



备注:

1. 材料: 载带PS 雾透色 t=0.3




热封/自粘上盖带: PET t=0.05mm.

纸箱: 纤维板、波纹、双墙, 黄色。

卷盘: 聚苯乙烯, 耐热温度: 70℃, 蓝色。

2. PET膜剥离力: 30~70g, 剥离速度: 300mm/分钟。

3. 带子前后预留:

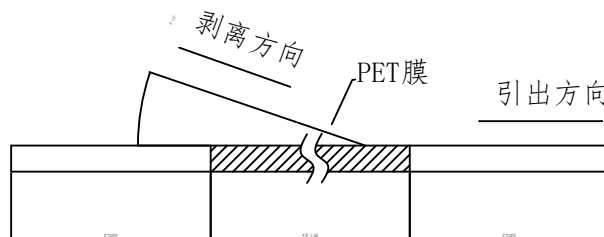

卷装包装明细			
PIN位	每卷包装数	每件盘数	每件数量
02P~07P	1500 (PCS)	20 (盘)	30 (K)
08P~13P	1500 (PCS)	14 (盘)	21 (K)
14P~16P	1500 (PCS)	11 (盘)	16.5 (K)



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0013-1



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3"
.XX: ±0.25 .X'': ±2"
.XXX: ±0.13 .X''': ±1"

APPD. JM_Zheng
CHKD. LYX
DR. TSP

NAME: 针座 1.0-16P 卧贴 米黄色
PJ. NO.: WT.10.61-73-H011
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2