









REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

Specifications:

Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 150V AC DC
 Rated current: 3.0A AC DC
 Withstand Voltage: 500v AC/minute
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
 Housing: PA6T UL94V-0, Black
 Contacts: Phosphor bronze Gold
 Solder Tabs: Phosphor bronze Matte Sn



05P~12P Double Opening

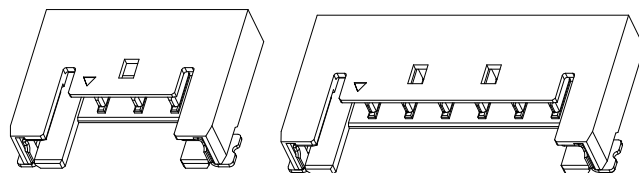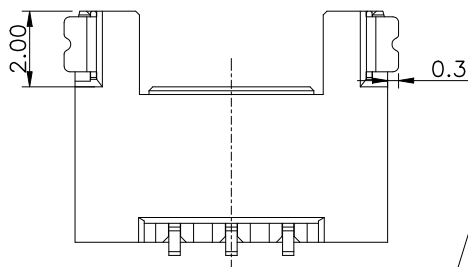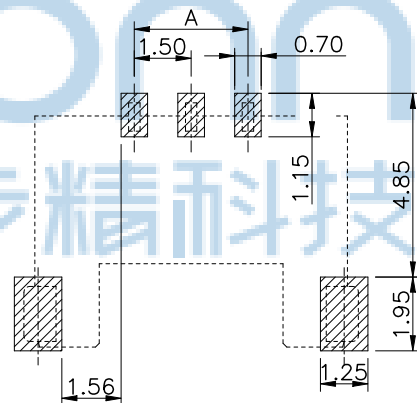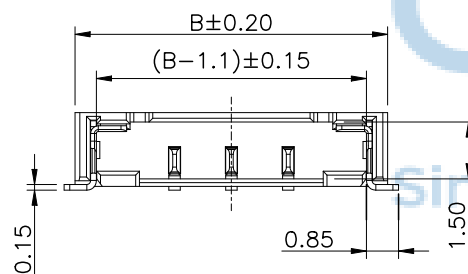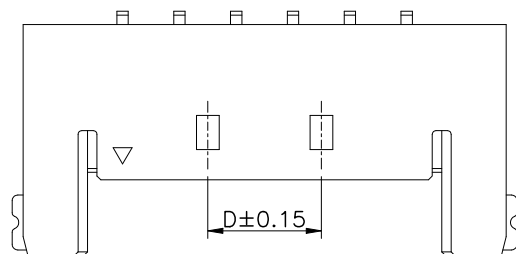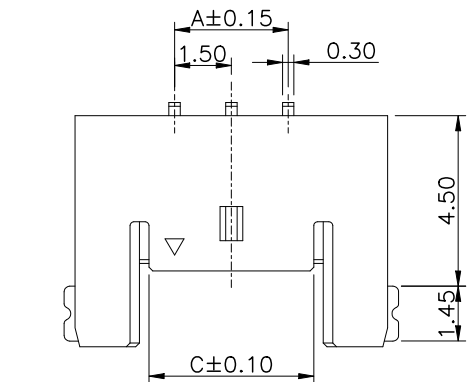

Circuits	Dimensions(mm)			
	A	B	C	D
2	1.50	6.75	2.85	
3	3.00	8.25	4.35	
4	4.50	9.75	5.85	
5	6.00	11.25	7.35	3.00
6	7.50	12.75	8.85	3.00
7	9.00	14.25	10.35	4.50
8	10.50	15.75	11.85	6.00
9	12.00	17.25	13.35	7.50
10	13.50	18.75	14.85	9.00
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00

SUGGESTED PCB LAYOUT



THIS DOCUMENT IS THE
 SOLE PROPERTY OF
 BBJconn Technology Co.,Ltd.
 Corporation AND SHOULD
 NOT BE USED IN WHOLE
 PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1

深圳市步步精科技有限公司

.X: ± 0.38 .X': $\pm 3'$
 .XX: ± 0.25 .X': $\pm 2'$
 .XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR SGF



NAME: 针座 1.50-2P 超薄款 卧贴 黑色 编带

PJ NO: 123-261-020001-Y3G


SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV: A0 UNIT: mm PAGE: 1/1

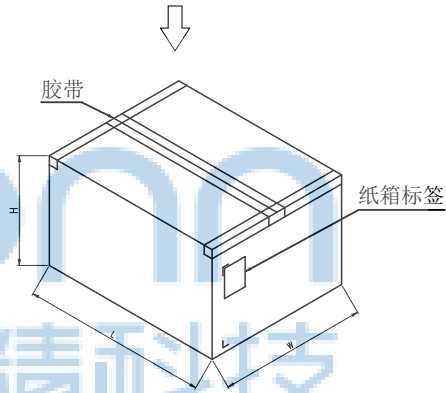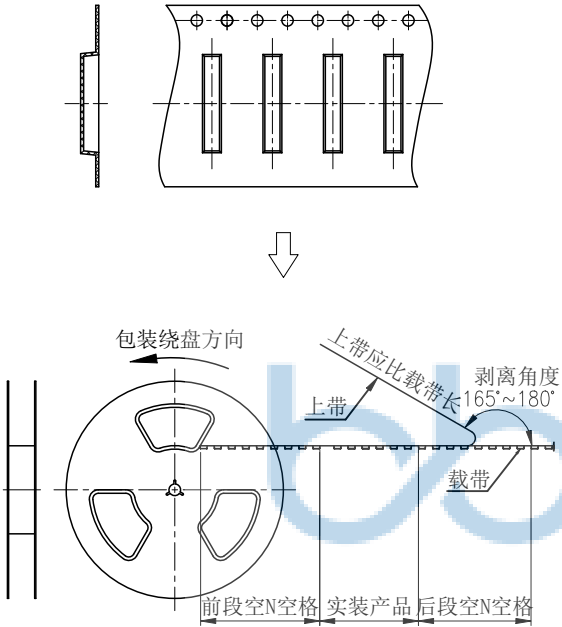

纸箱规格: W345*L345*H230MM

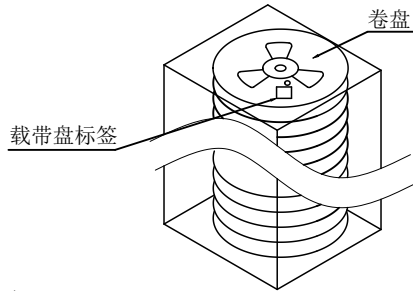

备注:

- 1、包装数量: 2000/PCS/卷, 10卷/箱.
- 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装.
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯.

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.	.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$		NAME: 针座 1.50-2P 超薄款 卧贴 黑色 编带				
	APPD	JM_Zheng				PJ NO: 123-261-020001-Y3G			
	CHKD	LYX				SIZE:A4	DRW NO:		
	PDWG NO:0510-1	DR				FINISH:SEE NOTES		MAT'L:SEE NOTES	
					SCALE:N/A		REV: A0	UNIT:mm	PAGE: 2/2