

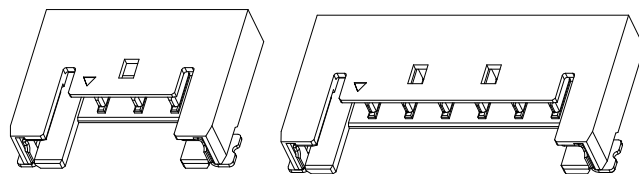
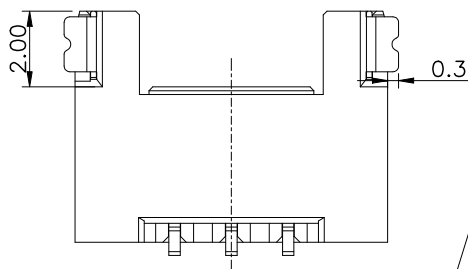

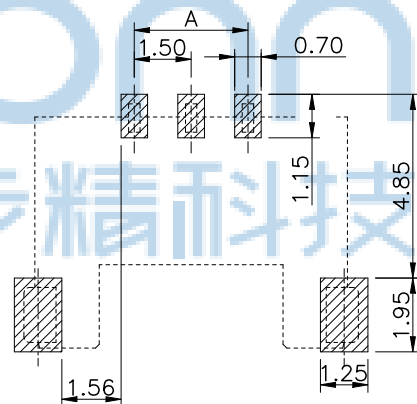

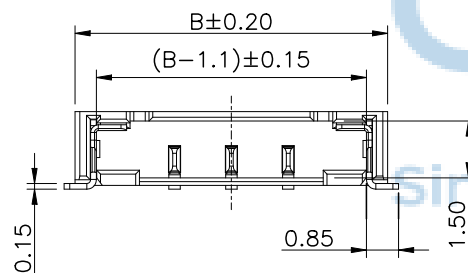


Specifications:
Contact resistance: $\leq 20m\Omega$
Insulation resistance: $\geq 1000M\Omega$
Rated voltage: 150V AC DC
Rated current: 3.0A AC DC
Withstand Voltage: 500v AC/minute
Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
Housing: PA6T UL94V-0, Black
Contacts: Phosphor bronze Gold
Solder Tabs: Phosphor bronze Matte Sn

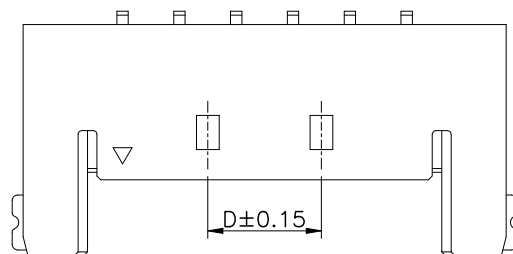

05P~12P Double Opening

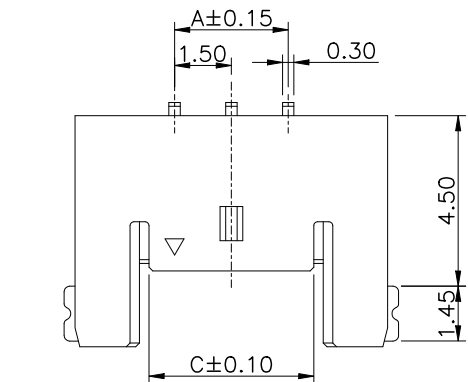

SUGGESTED PCB LAYOUT



Circuits	Dimensions(mm)			
	A	B	C	D
2	1.50	6.75	2.85	
3	3.00	8.25	4.35	
4	4.50	9.75	5.85	
5	6.00	11.25	7.35	3.00
6	7.50	12.75	8.85	3.00
7	9.00	14.25	10.35	4.50
8	10.50	15.75	11.85	6.00
9	12.00	17.25	13.35	7.50
10	13.50	18.75	14.85	9.00
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR

SGF

NAME:

针座 1.50-3P 超薄款 卧贴 黑色 编带

PJ NO: 123-261-030002-Y3G

SIZE:A4 DRW NO:


FINISH:SEE NOTES

SCALE:N/A

MAT'L:SEE NOTES

UNIT:mm

PAGE:1/1

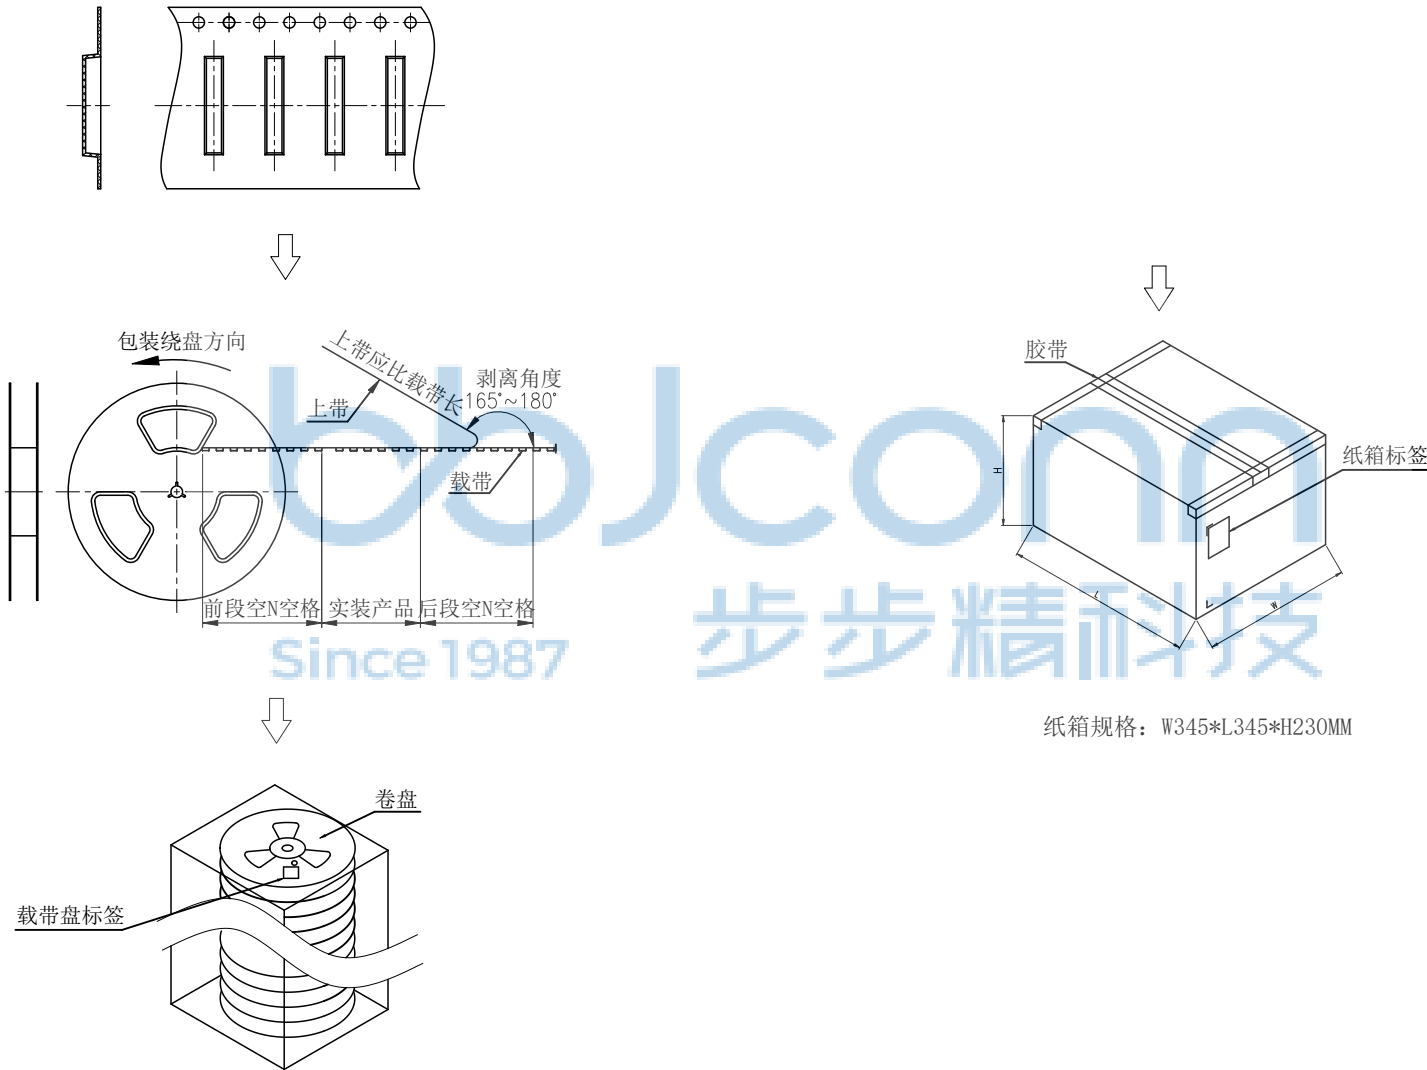

备注:

- 1、包装数量: 2000/PCS/卷, 10卷/箱.
- 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装.
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯.

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO:0510-1		深圳市步步精科技有限公司		NAME:	
				针座 1.50-3P 超薄款 卧贴 黑色 编带	
				PJ NO:	123-261-030002-Y3G
				SIZE:A4	DRW NO:
APPD	JM_Zheng	FINISH:SEE NOTES		MAT'L:SEE NOTES	
CHKD	LYX				
DR		SCALE:N/A	REV: A0	UNIT:mm	PAGE: 2/2