







REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

技术参数:

- 1、所有材料符合ROHS2.0/REACH要求。
- 2、额定电流: 3A, AC, DC;
- 3、额定电压: 250V, AC, DC;
- 4、温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$;
- 5、接触电阻: $\leq 0.02\Omega$;
- 6、绝缘电阻: $\geq 1000\text{M}\Omega$;
- 7、耐压: 1000V, AC/minute.



Circuits	Dimensions (mm)		
	A	B	C
02	2.50	6.00	7.50
03	5.00	8.50	10.00
04	7.50	11.00	12.50
05	10.00	13.50	15.00
06	12.50	16.00	17.50
07	15.00	18.50	20.00
08	17.50	21.00	22.50
09	20.00	23.50	25.00
10	22.50	26.00	27.50
11	25.00	28.50	30.00
12	27.50	31.00	32.50
13	30.00	33.50	35.00
14	32.50	36.00	37.50
15	35.00	38.50	40.00
16	37.50	41.00	42.50

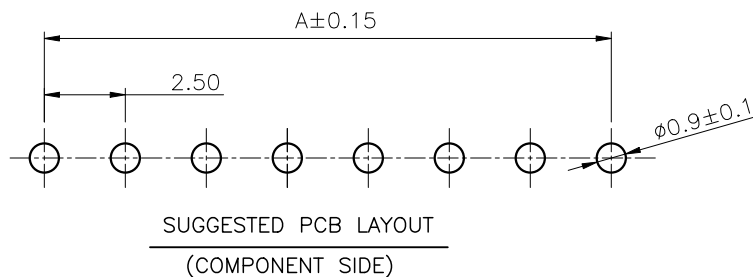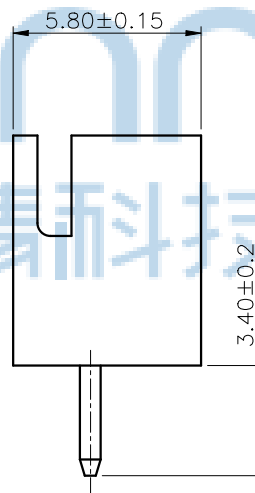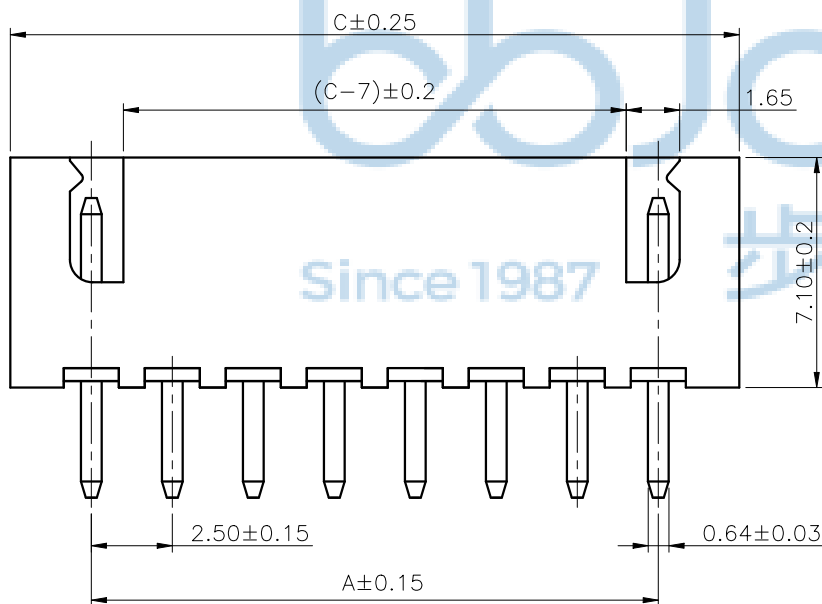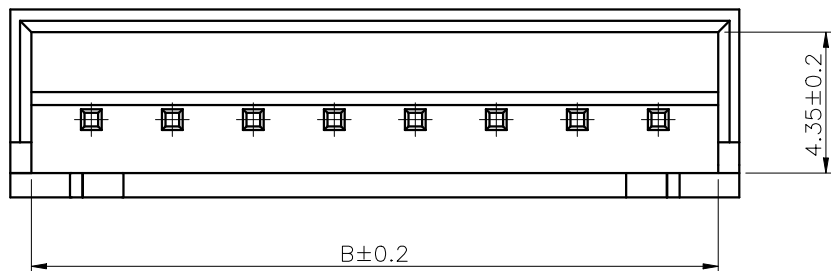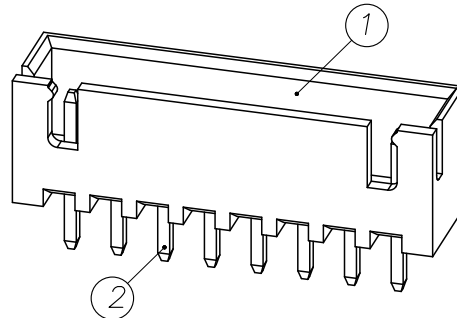


序号	产品名称	材料规格	表面处理/颜色	数量
1	基座	PA66 (UL94V-0)	红色	1
2	端子	黄铜	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡 80u"MIN.	n*1

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0510-1	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" .XX': ±1"		NAME: 针座 XH-4A(2.54-4P) 直针 红色 袋装				
	APPD	JM_Zheng				PJ NO: 123-2A5-040002-Y3G			
	CHKD	LYX				SIZE:A4	DRW NO:		
						FINISH:SEE NOTES		MAT'L:SEE NOTES	
						SCALE:N/A		REV:A0	UNIT:mm

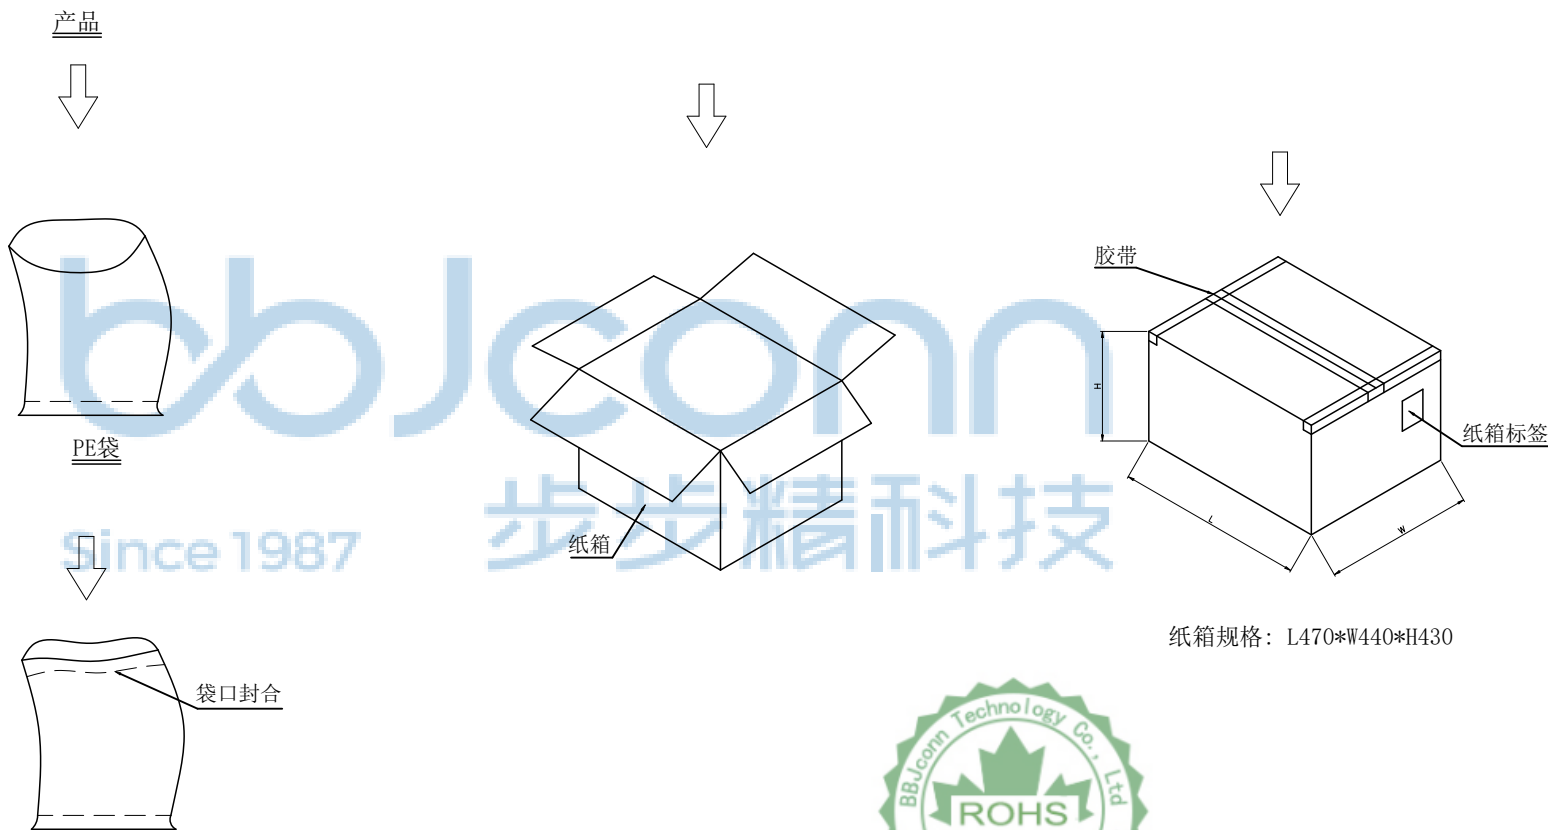

- 1、包装要求:
- 1.1 PE袋包装1000pcs;
 - 1.2 每81袋放一个纸箱, 共计81000pcs;
 - 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0510-1		BBJconn Technology Co., Ltd. 深圳市步步精科技有限公司			
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: 针座 XH-4A (2.54-4P) 直针 红色 袋装	
		APPD	JM_Zheng	SIZE: A4	PJ NO: 123-2A5-040002-Y3G
		CHKD	LYX	DRW NO:	
		DR	SGF	FINISH: SEE NOTES	MAT'L: SEE NOTES
				SCALE: N/A	REV: A0
				UNIT: mm	PAGE: 2/2