


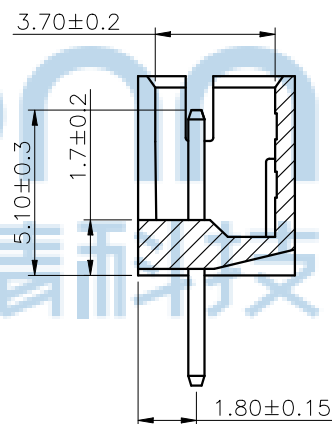
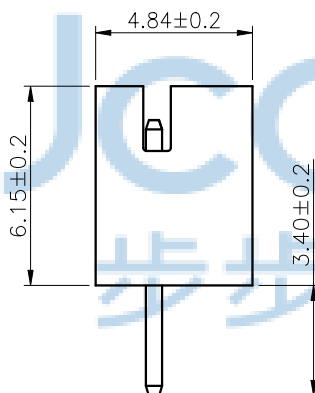
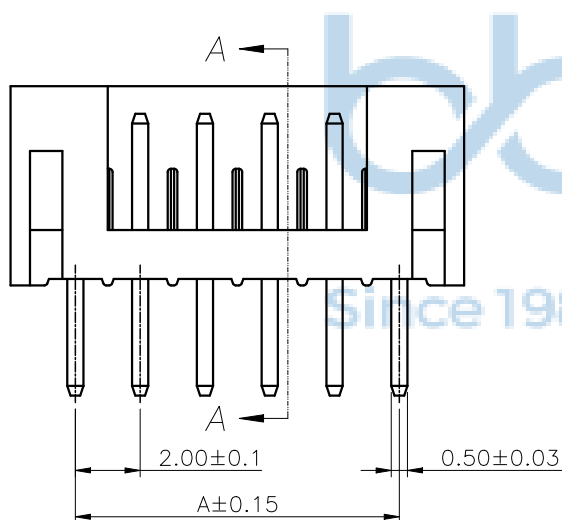


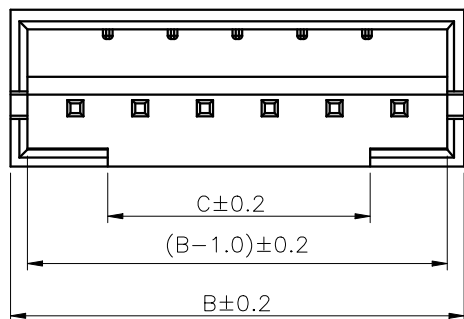

SECTION A-A

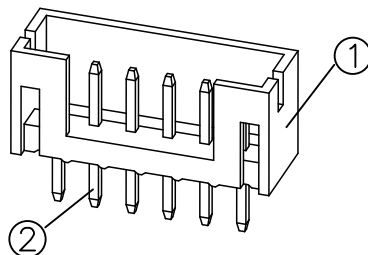

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

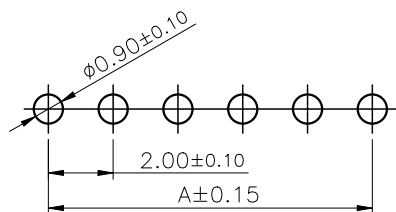

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

技术参数:


- 1、所有材料符合ROHS2.0/REACH法规。
- 2、额定电流: 2A, AC, DC;
- 3、额定电压: 100V, AC, DC;
- 4、温度范围: -25℃~+85℃;
- 5、接触电阻: $\leq 0.02\Omega$;
- 6、绝缘电阻: $\geq 1000M\Omega$;
- 7、耐压: 500V, AC/minute.
- 8、适用线规: AWG#32 to #24

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	6.00	1.00
03	4.00	8.00	2.00
04	6.00	10.00	4.00
05	8.00	12.00	6.00
06	10.00	14.00	8.00
07	12.00	16.00	10.00
08	14.00	18.00	12.00
09	16.00	20.00	14.00
10	18.00	22.00	16.00
11	20.00	24.00	18.00
12	22.00	26.00	20.00
13	24.00	28.00	22.00
14	26.00	30.00	24.00
15	28.00	32.00	26.00
16	30.00	34.00	28.00
17	32.00	36.00	30.00
18	34.00	38.00	32.00
19	36.00	40.00	34.00
20	38.00	42.00	36.00

序号	产品名称	材料规格	表面处理/颜色	数量
1	基座	PA66 (UL94V-0)	黑色	1
2	端子	黄铜	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡 80u"MIN.	n*1

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0510-1		深圳市步步精科技有限公司	
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$ X'': $\pm 2'$ XX': $\pm 1'$
		NAME: 针座 PH-3A (2.0-3P) 直针 黑色 袋装	
		APPD JM_Zheng CHKD LYX DR SGF	PJ NO: 123-275-030004-Y3G SIZE:A4 DRW NO: FINISH:SEE NOTES SCALE:N/A REV:A0 MAT'L:SEE NOTES UNIT:mm PAGE:1/2

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

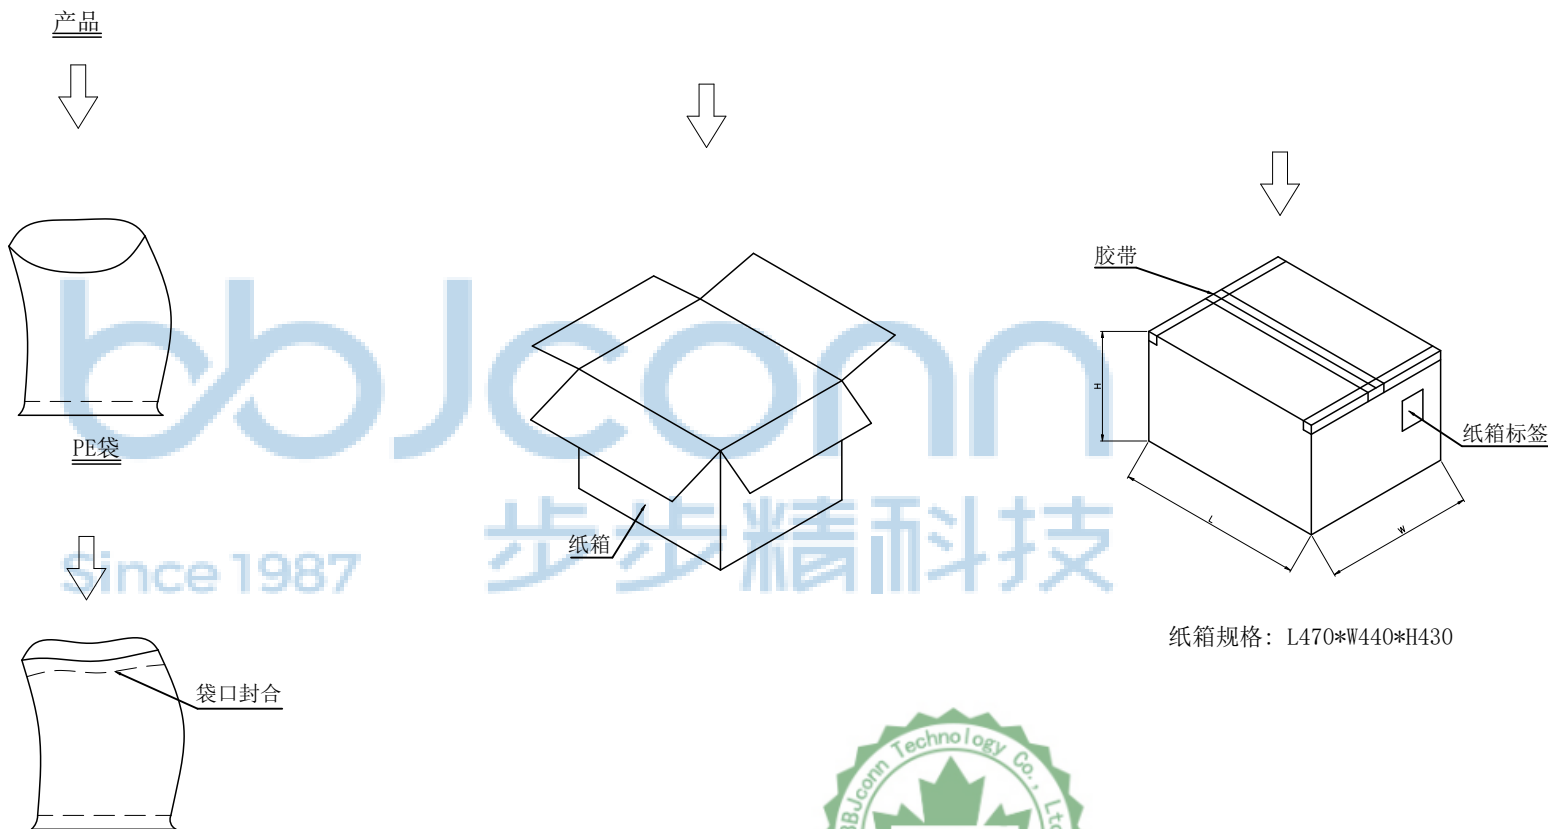

- 1、包装要求:
- 1.1 PE袋包装2000pcs;
 - 1.2 每81袋放一个纸箱, 共计162000pcs;
 - 1.3 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		® 深圳市步步精科技有限公司	
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"
APPD	JM_Zheng	NAME: 针座 PH-3A (2.0-3P) 直针 黑色 袋装	
CHKD	LYX	⊙	PJ NO: 123-275-030004-Y3G
PDWG NO: 0510-1		SCALE: N/A	REV: A0
DR		SGF	MAT'L: SEE NOTES
		UNIT: mm	PAGE: 2/2