




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$;
- 3、额定电流: 3A AMPS (24#)
- 4、额定电压: 250V, AC, DC (等效);
- 5、接触电阻: $\leq 0.03\Omega$;
- 6、绝缘电阻: $\geq 1000\text{M}\Omega$;
- 7、耐压: 1000V, AC/minute.

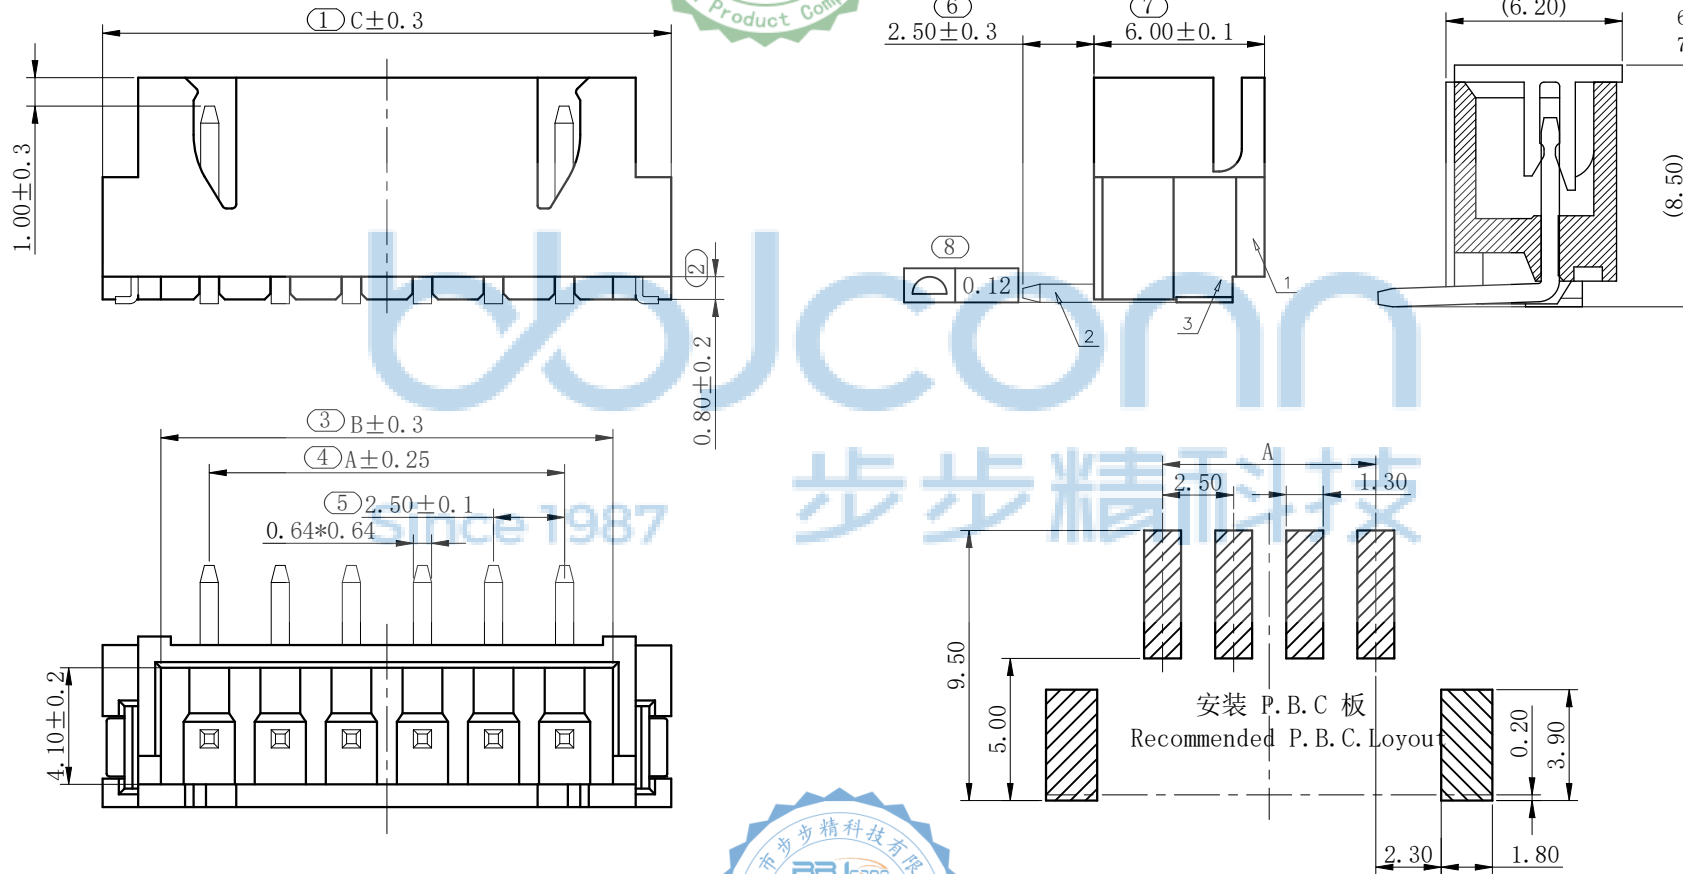

孔位 poles	A	B	C
2	2.5	5.9	10.0
3	5.0	8.4	12.5
4	7.5	10.9	15.0
5	10.0	13.4	17.5
6	12.5	15.9	20.0
7	15.0	18.4	22.5
8	17.5	20.9	25.0
9	20.0	23.4	27.5
10	22.5	25.9	30.0
11	25.0	28.4	32.5
12	27.5	30.9	35.0
13	30.0	33.4	37.5
14	32.5	35.9	40.0
15	35.0	38.4	42.5
16	37.5	40.9	45.0






3	翻 fitting	翻物		电(号): 翻件翻物翻30u"MIN, 翻物 80u"MIN..
2	翻 Contact	翻物	n*1	电(号): 翻件翻物翻30u"MIN, 翻物 80u"MIN..
1	翻 Wafer	LCP (UL94V-0)	1	绝
序号	名称	材料	数量	附注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X": $\pm 3^{\circ}$.X": $\pm 2^{\circ}$.XX": $\pm 1^{\circ}$		NAME: 针座2.54-4P 立贴 加盖 米黄色			
APPD.	JM_Zheng	P.J. NO.: 123-2A4-040001-Y3G		SIZE: A4 DRW NO.:			
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES			
DR.	GZY	SCALE: N/A		REV.: A0		UNIT: mm	
PDWG.NO: 0510-1				PAGE: 1/2			




Note:



1. Sprocket holes pitch cumulative tolerance ± 0.1 . (Accumulative Pitch ± 0.2)
2. Carrier camber is within 1mm in 100mm.
3. Number of connectors:
534Pcs/REEL
4. All dimensions meet EIA-481-D requirements.
5. Thick ness: 0.4 ± 0.05 mm.
6. Material of top fape: PET, PE, PEF
7. Material of carrier fape: Poystyrene
8. For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

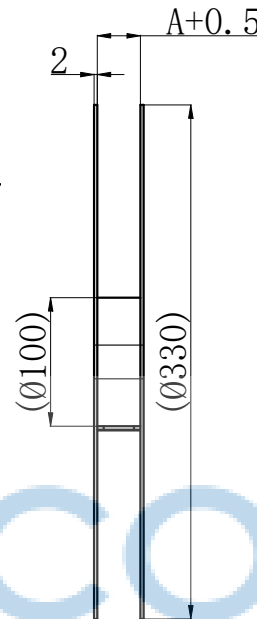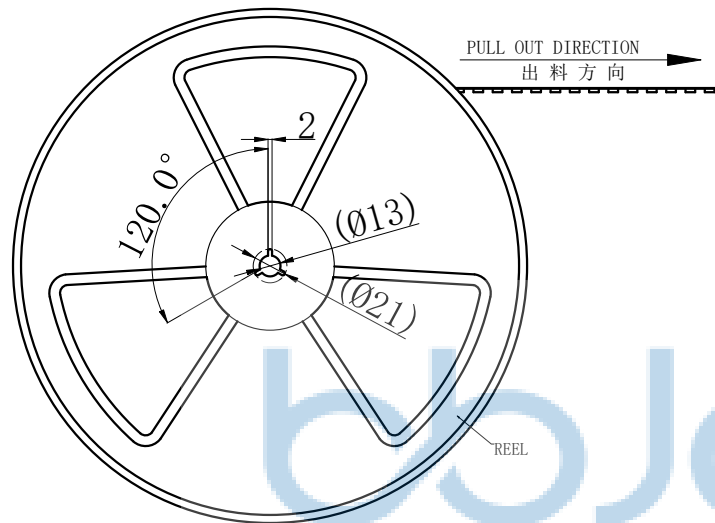


载带带头及带尾尺寸
Lead tape length



载带上下带剥离强度: 0.1N--1.3N (10g-130g)
Peeling off force of top tape:
0.1N--1.3N (10g-130g)

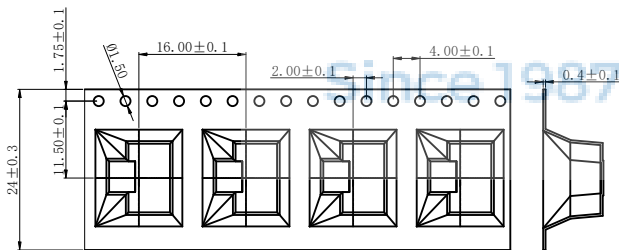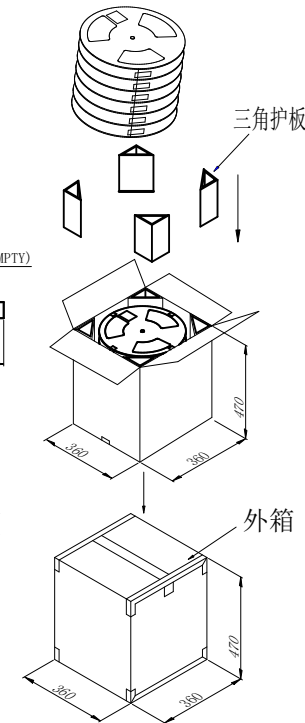

PULL OUT DIRECTION
出料方向
宽度: 24mm 载带

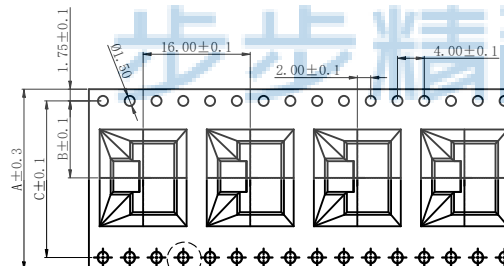

PULL OUT DIRECTION
出料方向
宽度 32 及以上 mm 载带



芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
2-4	XH-2AB --- XH-4AB	24.0	11.5	---
5-6	XH-5AB --- XH-6AB	32.0	14.2	28.4
7-11	XH-7AB --- XH-11AB	44.0	20.2	40.4
12-16	XH-12AB --- XH-16AB	56.0	26.2	52.4

PART No.	XH-2AB			
REEL WIDTH	24			
PCS/REEL	534			
CTN. SIZE	360*360*350			

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$ X'': $\pm 2'$.XX': $\pm 1'$	
APPD.	JM_Zheng	NAME: 针座 2.54-4P 立贴 加盖 米黄色	
CHKD.	LYX	PJ. NO.: 123-2A4-040001-Y3G	
DR.	GZY	SIZE: A4 DRW NO.:	
PDWG. NO:	0510-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	