

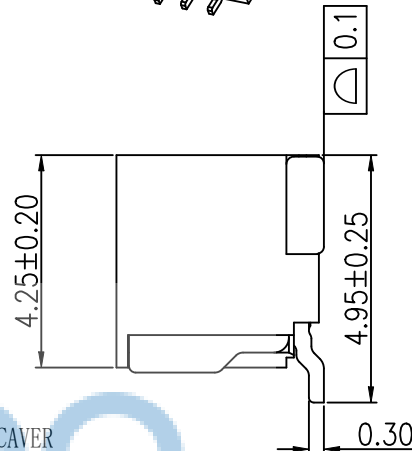
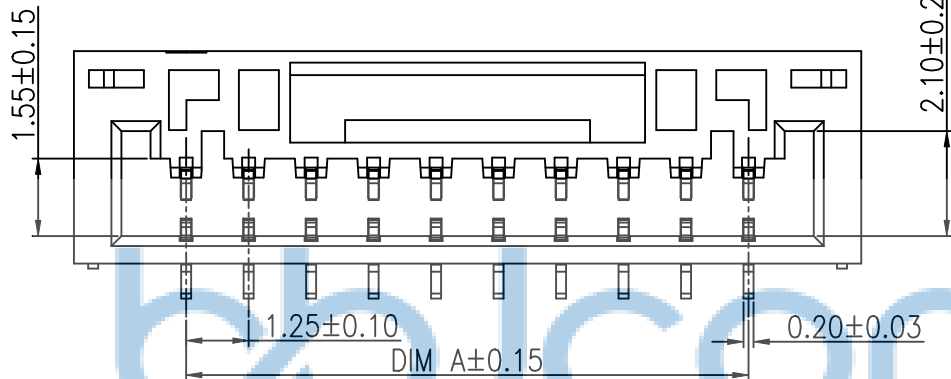


DIM B±0.2

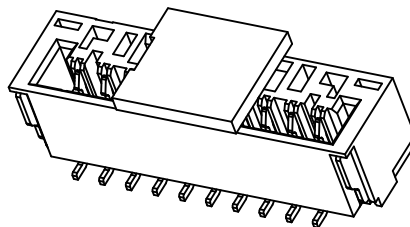

CAVER

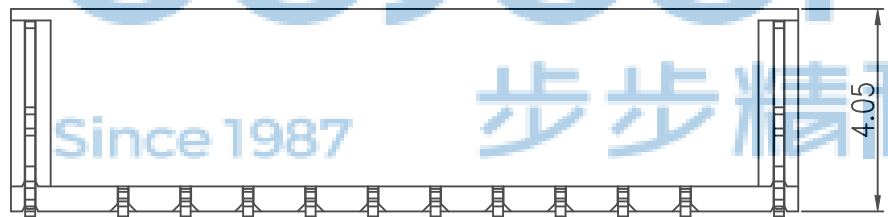

DIM±0.1

1.25±0.05

2-1.50

2-1.00

1.50

1.90

PCB LAYOUT (BOTTOM VIEW)

Tolerance (±0.05)



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	2023 07/20	HONGGUANG

NOTES:

1. 材料: 见下表。
2. 额定电压: 50V AC/DC;
3. 额定电流: 1.0A AC/DC;
4. 接触电阻: 30 mΩ;
5. 绝缘电阻: 100 MΩ;
6. 耐压: 500V AC/Min ;
7. 工作温度: -25° C~+105° C;
8. 产品ROHS环保要求;



料号说明:





123-254- XX 0001-00G

PIN位: 02: 2P
03: 3P

CIRCUITS	Dimensions		CIRCUITS	Dimensions	
	DIM A	DIM B		DIM A	DIM B
2P	1.25	5.75	10P	11.25	15.75
3P	2.50	7.00	11P	12.50	17.00
4P	3.75	8.25	12P	13.75	18.25
5P	5.00	9.50	13P	15.00	19.50
6P	6.25	10.75	14P	16.25	20.75
7P	7.50	12.00	15P	17.50	22.00
8P	8.75	13.25	18P	21.25	25.75
9P	10.00	14.50	20P	23.75	28.25

1	主体	1	LCP, 本色, UL94 V-0
2	夹持盖	1	高温材料, 本色, UL94 V-0
3	端子	nx1p	磷青铜, 镀亮锡80U"MIN, 镀镍30U"
4	接地片	2	铜合金, 镀亮锡80U"MIN, 镀镍30U"
序 号	名 称	数 量	规 格

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0510-1		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13 APPD. JM_Zheng 20/04'23 CHKD. DAX DR. SGH	NAME: 针座 GH1.25(1.25-12P) 立贴 加盖 带扣 米黄色 PJ. NO.: 123-254-120001-Y3G SIZE: A4 DRW NO.: FINISH: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm
		MAT'L.: SEE NOTES PAGE: 1/2	

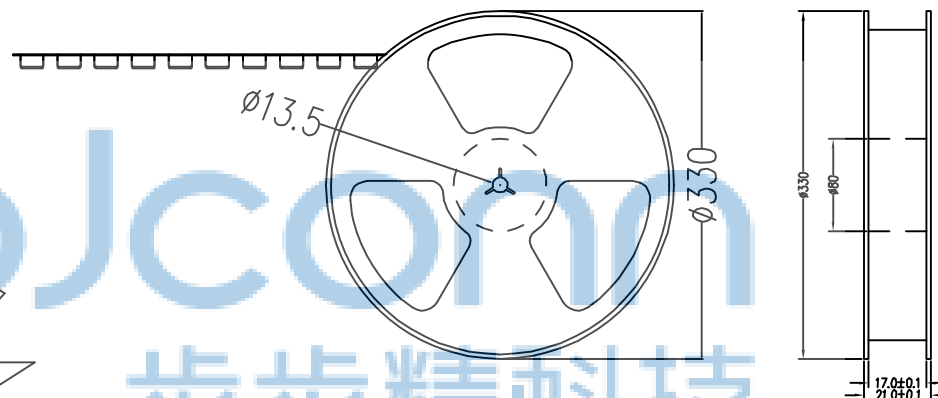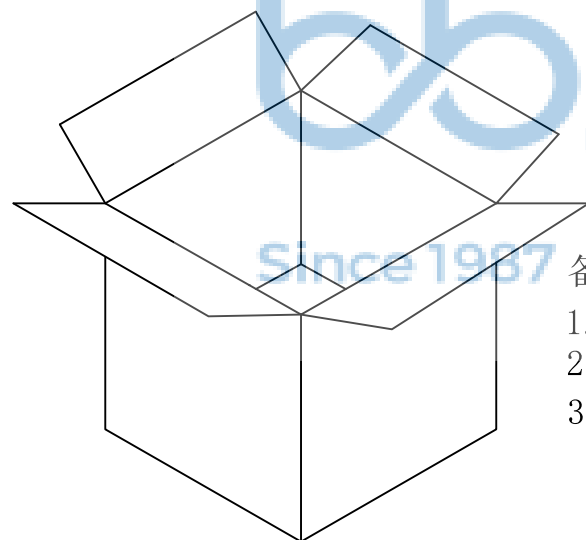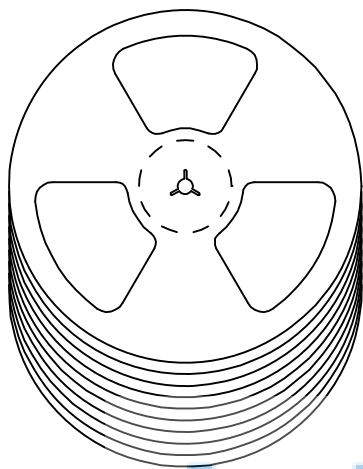

备注:

- 包装数量: 1000/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38	X': $\pm 3'$	NAME: 针座 GH1.25(1.25-12P) 立贴 加盖 带扣 米黄色	
.XX: ± 0.25	.X': $\pm 2'$		
.XXX: ± 0.13	.XX': $\pm 1'$		
APPD.	JM_Zheng	PJ. NO.: 123-254-120001-Y3G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0510-1	DR.	FINISH: SEE NOTES MAT'L.: SEE NOTES	
	TSP	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	