
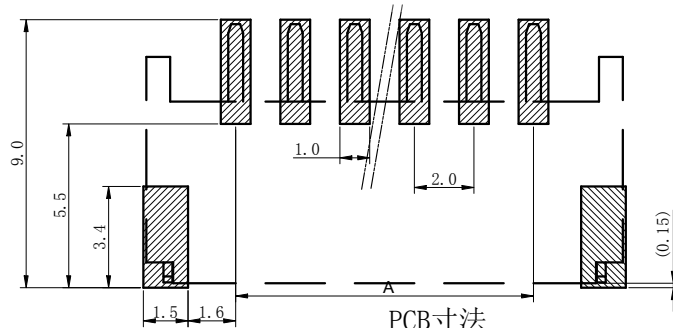
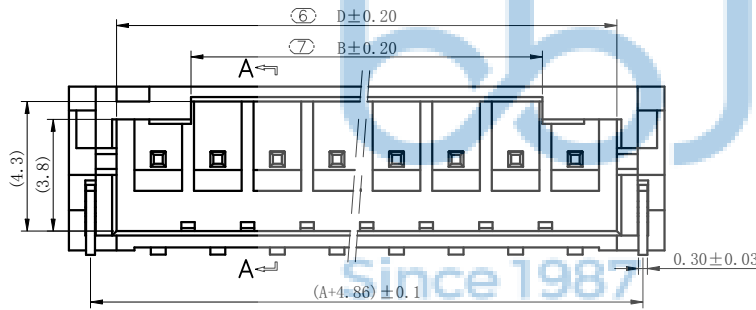
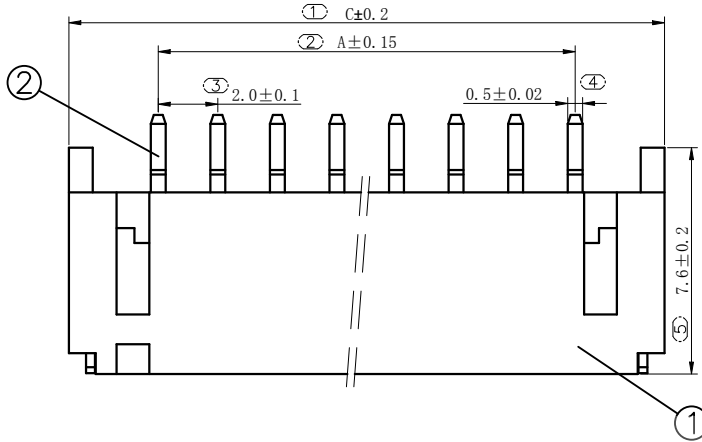


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: -25°C ~ 85°C ;
- 3、额定电压: 250V, AC, DC(等效);
- 4、接触电阻: $\leq 0.03\Omega$;
- 5、绝缘电阻: $\geq 1000\text{M}\Omega$;
- 6、耐压: 1000V, AC/minute.



PCB寸法
PCB Layout




CKT	dim A	dim B	dim C	dim D
2	2	1	8	4.8
3	4	2	10	6.8
4	6	4	12	8.8
5	8	6	14	10.8
6	10	8	16	12.8
7	12	10	18	14.8
8	14	12	20	16.8
9	16	14	22	18.8
10	18	16	24	20.8
11	20	18	26	22.8
12	22	20	28	24.8
13	24	22	30	26.8
14	26	24	32	28.8
15	28	26	34	30.8
16	30	28	36	32.8

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0510-1

深圳市步步精科技有限公司


.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X*: $\pm 3^{\circ}$.X*: $\pm 2^{\circ}$.XX*: $\pm 1^{\circ}$	NAME: 针座 2.0-6P 卧贴 米黄色
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: WT.01.61-73-M002
DR. TSP		SIZE: A4 DRW NO.:
		FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

序号	名称	材料	数量	附注
4	焊片 Fitting Nail	黄铜 Brass	2	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u"MIN..
3	端子 Contact	黄铜 Brass	2	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u"MIN..
1	基座 Housing	LCP (UL94V-0)	1	本色

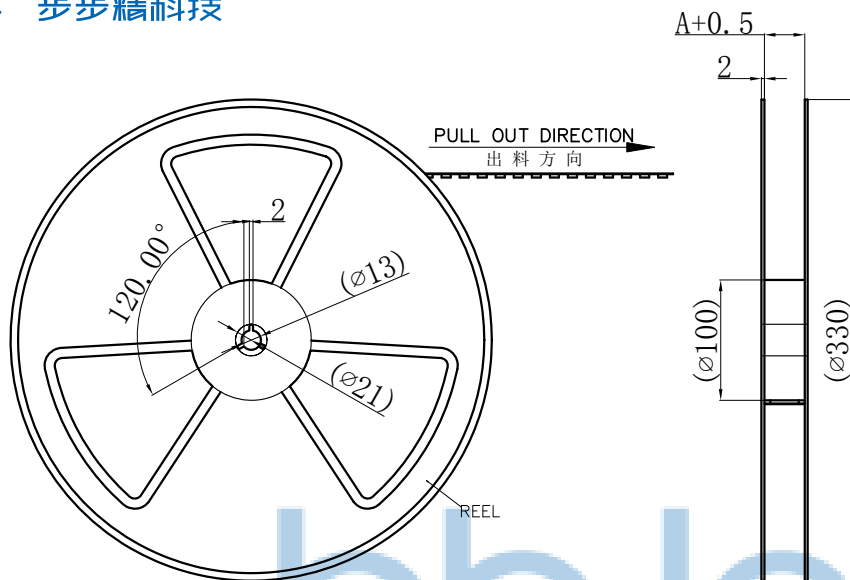


Note:

- 1.Sprocket holes pitch cumulative tolerance ± 0.1 . (Accumulative Pitch ± 0.2)
- 2.Carrier camber is within 1mm in 100mm.
- 3.All dimensions meet EIA-481-D requirements.
- 4.Thick ness: 0.4 ± 0.1 mm.
- 5.Material of top fape: PET, PE, PEF
- 6.Material of carrier fape: Poystyrene
- 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

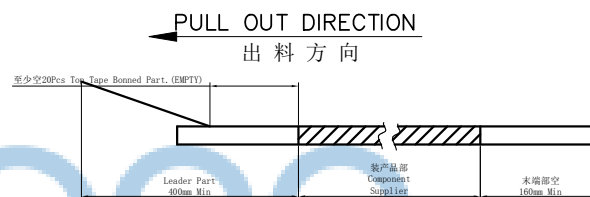


载带带头及带尾尺寸
Lead tape length

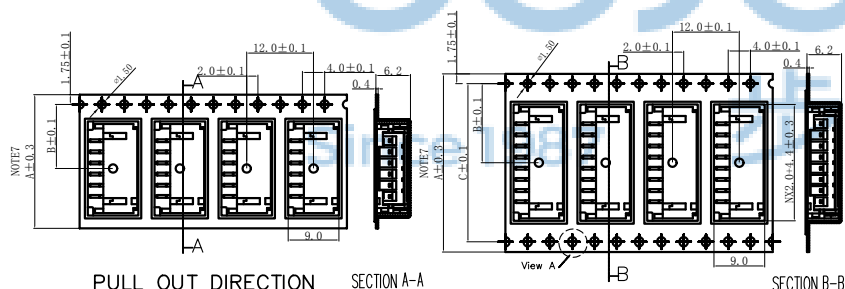


PULL OUT DIRECTION
出料方向


宽度:16mm/24mm 载带



View A

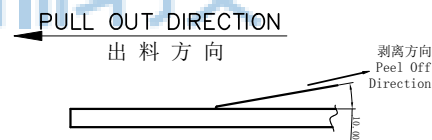

载带上下带剥离强度:
0.1N--1.3N(10g-130g)
Peeling off force of top tape:
0.1N--1.3N(10g-130g)

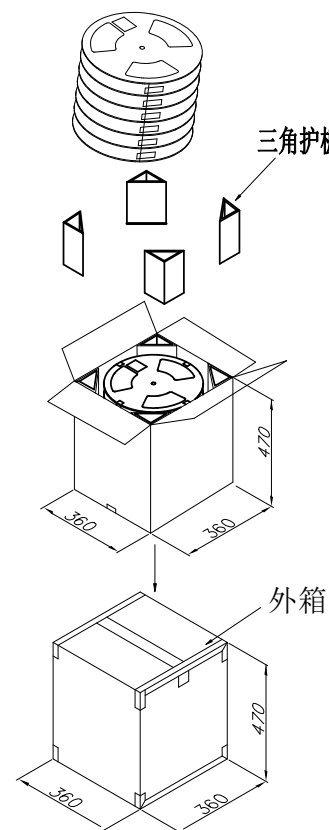

芯 数 Pin (n)		尺 寸 Size			PART No.							
						A	B	C	REEL WIDTH	16	24	32
2-3	PH-2AWB	—	PH-3AWB	16.0	7.5	---	REEL WIDTH	16	24	32	44	56
4-6	PH-4AWB	—	PH-6AWB	24.0	11.5	---						
7-8	PH-7AWB	—	PH-8AWB	32.0	14.2	28.4						
9-14	PH-9AWB	—	PH-14AWB	44.0	20.2	40.4	PCS/REEL	1040				
15-16	PH-15AWB	—	PH-16AWB	56.0	26.2	52.4						
CTN. SIZE							360*360*470					

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE



深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

NAME:	针座 2.0-6P 卧贴 米黄色
-------	------------------

APPD. JM Zheng

	PJ. NO.: WT.01.61-73-M002
---	---------------------------

At 1.2:	cm_Energy
cm_Energy	

SIZE: A4 | DRW NO.:

4.	CHKD.	LYX
----	-------	-----

FINISH: SEE NOTES	MAT'L : SEE NOTES
-------------------	-------------------

DR.	TSP
-----	-----

SCALE: N/A	REV: 00	UNIT: mm	PAGE: 3 / 3
------------	---------	----------	-------------