
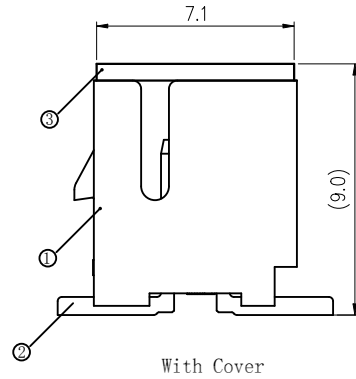


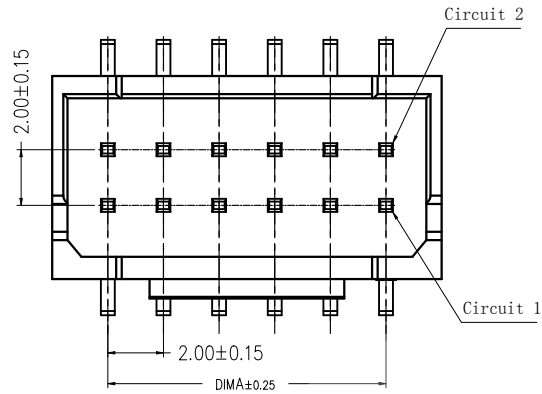

2*2PIN-2*5PIN	△0.10
2*6PIN-2*12PIN	△0.13
2*13PIN-2*22PIN	△0.15




With Cover

序号	品名	材质
①	2.0A型双排立式WTB胶芯	LCP UL94V-0 本色
②	2.0A型立式(缠绕)端子	铜合金/表面镀锡
③	2.0A型双排立式WTB吸盖	LCP UL94V-0 本色


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 工作温度: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
3. 适用线规: AWG#28~#22.
4. 额定电压: 250V DC/AC(rms).
5. 额定电流: 3.0A AC, DC.
6. 接触电阻: $\leq 20\text{m}\Omega$.
7. 耐压值: 800V AC/minute.
8. 绝缘电阻: $\geq 1000\text{M}\Omega$

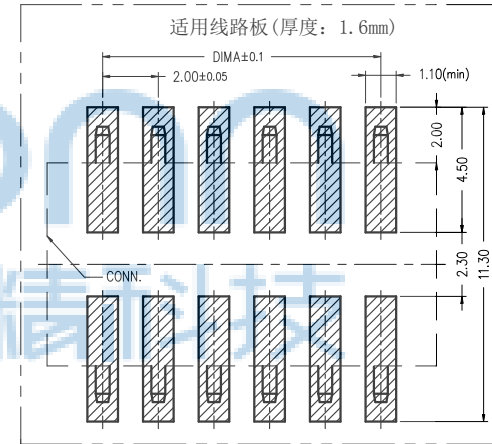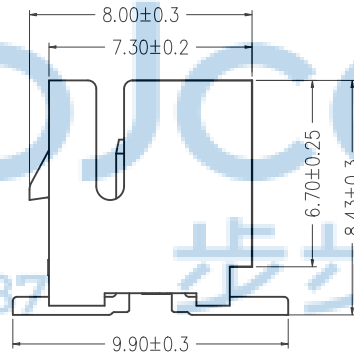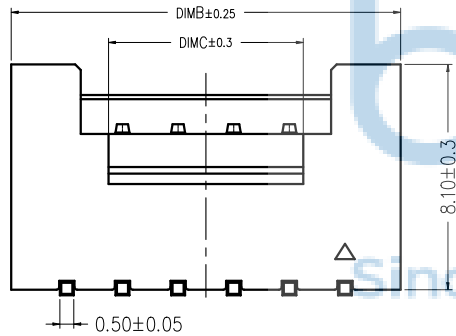


CKT	DIM A	DIM B	DIM C
2*2	2.0	6.0	3.0
2*3	4.0	8.0	3.0
2*4	6.0	10.0	3.0
2*5	8.0	12.0	5.0
2*6	10.0	14.0	7.0
2*7	12.0	16.0	9.0
2*8	14.0	18.0	11.0
2*9	16.0	20.0	13.0
2*10	18.0	22.0	15.0
2*11	20.0	24.0	17.0
2*12	22.0	26.0	19.0
2*13	24.0	28.0	21.0
2*14	26.0	30.0	23.0
2*15	28.0	32.0	25.0
2*16	30.0	34.0	27.0
2*18	34.0	38.0	31.0
2*20	38.0	42.0	35.0
2*22	42.0	46.0	39.0

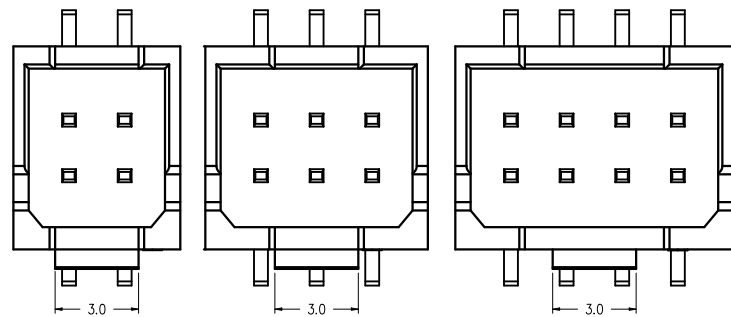


2~3P结构样式

4P 结构样式

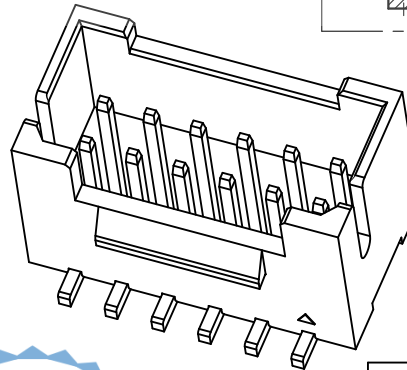

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0456-1

深圳市步步精科技有限公司	
NAME: 针座 PHB 2.0-2x6P A型 双排立贴 带扣 LCP本色 加盖编带	PJ. NO.: 123-274-120001-X3G
APPD. JM_Zheng	SIZE: A4 DRW NO.:
CHKD. LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES
DR. TSP	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

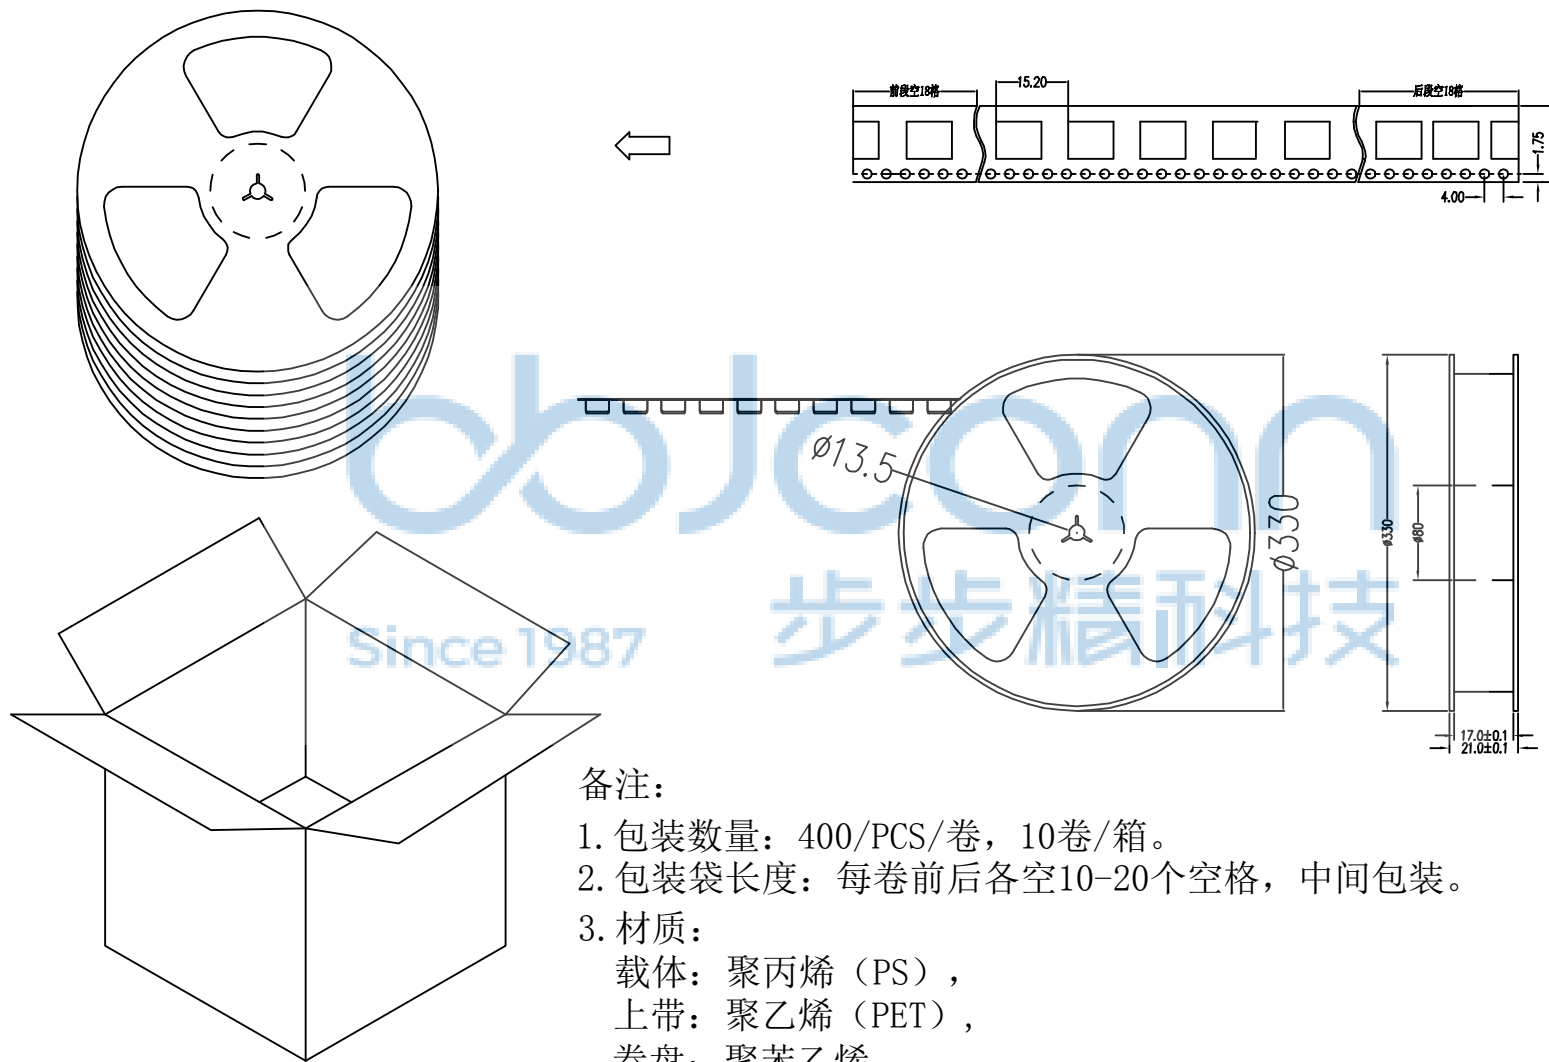

备注:

1. 包装数量: 400/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS),
上带: 聚乙烯 (PET),
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: 针座 PHB 2.0-2x6P A型 双排立贴 带扣 LCP本色 加盖编带	
APPD. JM_Zheng		P.J. NO.: 123-274-120001-X3G	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0456-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. TSP		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	