
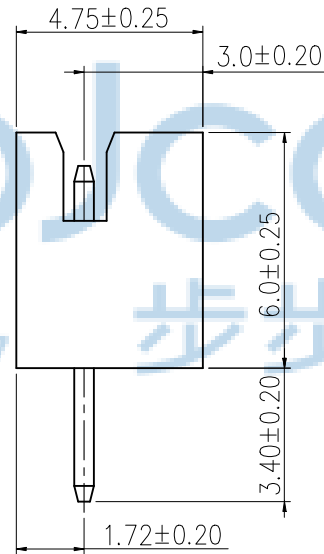



REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

技术指标 (Technical Index):


1. 工作温度 (Temperature range): $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
2. 额定电压 (Rated voltage): 200V DC/AC(rms).
3. 额定电流 (Rated current): 2.0A AC, DC.
4. 接触电阻 (Contact resistance): $\leq 25\text{m}\Omega$.
5. 耐压值 (Withstanding voltage): 500V AC/minute.
6. 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$.

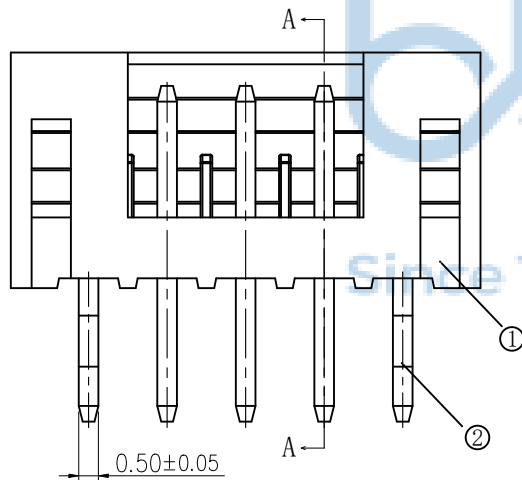

TYPE 1 (无K脚)

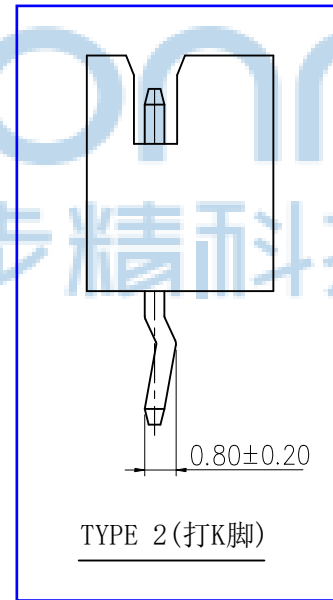


TYPE 2 (打K脚)

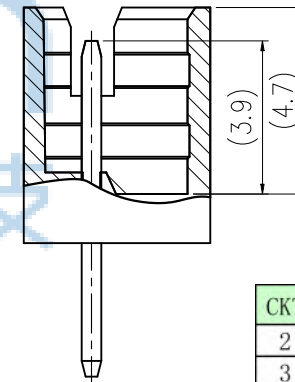

SECTION A-A

CKT	A	B	CKT	A	B
2	2.0	6.0	12	22.0	26.0
3	4.0	8.0	13	24.0	28.0
4	6.0	10.0	14	26.0	30.0
5	8.0	12.0	15	28.0	32.0
6	10.0	14.0	16	30.0	34.0
7	12.0	16.0	17	32.0	36.0
8	14.0	18.0	18	34.0	38.0
9	16.0	20.0	19	36.0	40.0
10	18.0	22.0	20	38.0	42.0
11	20.0	24.0			

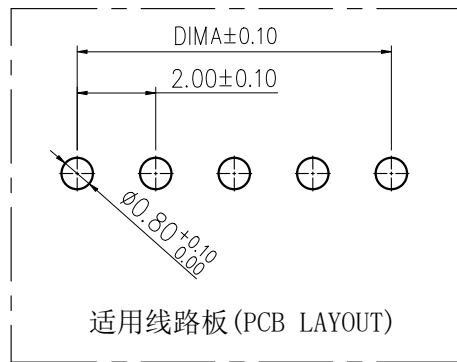

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1



深圳市步步精科技有限公司

NAME: 针座 PH 2.0-4P 直针 LCP黑色 打K脚 袋装	
APPD JM_Zheng	PJ NO: 123-275-040004-X3G
CHKD LYX	SIZE:A4 DRW NO:
DR SGF	FINISH:SEE NOTES MAT'L:SEE NOTES
	SCALE:N/A REV: A0 UNIT:mm PAGE: 1/2

序号	品名	材质
①	胶芯	LCP黑色
②	端子	铜合金/表面镀锡

NOTE(注):

- 1.纸箱装箱以不超过装箱线为准,空余位置用塑料泡沫及保尼龙填充;
- 2.纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装;
- 3.因生产Pin位未齐全, 每袋与整箱包装数量仅供参考, 具体包装数量以实际出货为准, 或批量出货更新后为准;

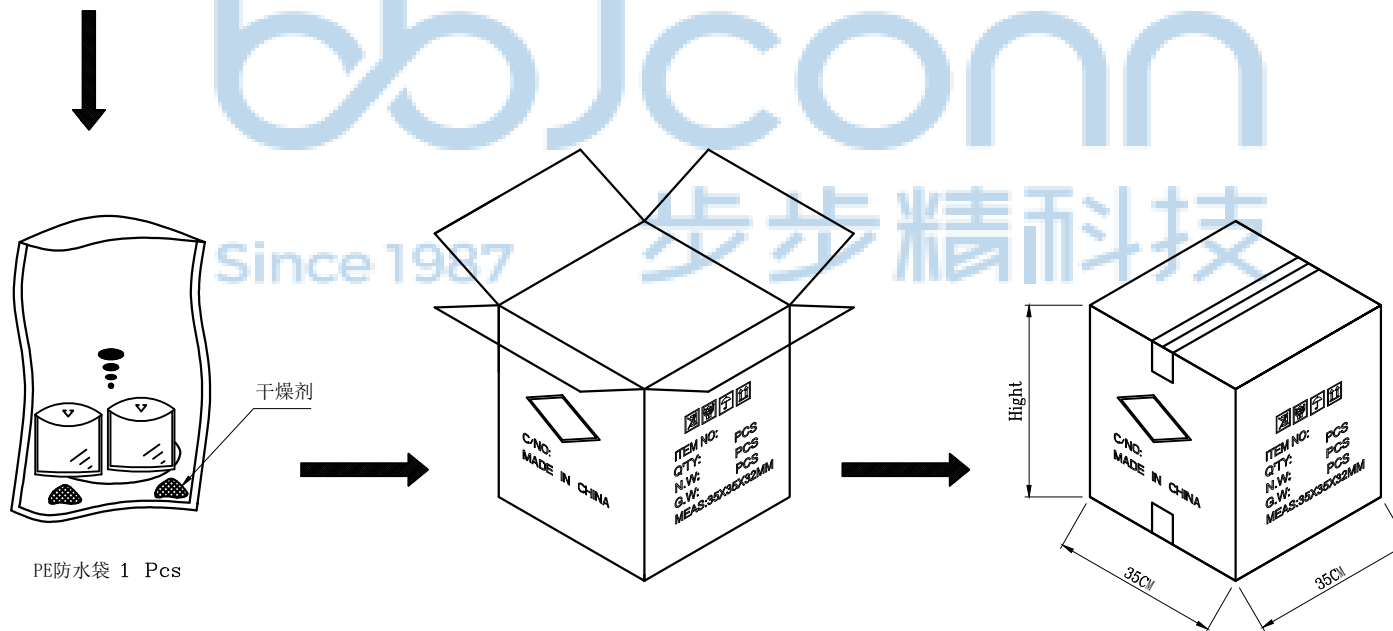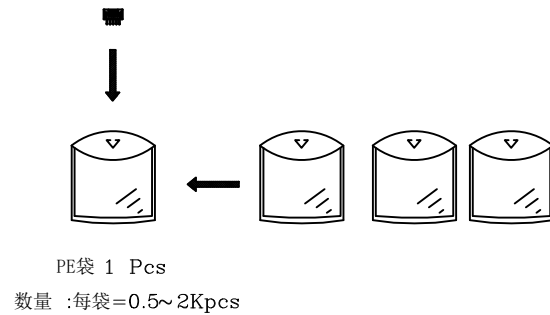

袋装包装数量			
CKT	PCS/BAG	CKT	PCS/BAG
2	2000	11	500
3	2000	12	500
4	2000	13	500
5	2000	14	500
6	1000	15	500
7	1000	16	500
8	1000		
9	1000		
10	1000		

纸箱型号	小型	中型	标准型
Carton Type	Small Size	Medium	Standard
高度 Hight (CM)	7.5	15	32



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1

深圳市步步精科技有限公司

NAME: 针座 PH 2.0-4P 直针 LCP黑色 打K脚 袋装	
PJ NO: 123-275-040004-X3G	
SIZE:A4	DRW NO:
FINISH:SEE NOTES	MAT'L:SEE NOTES
SCALE:N/A	REV: A0
UNIT:mm	PAGE: 2/2

APPD JM_Zheng

CHKD LYX

DR

SGF