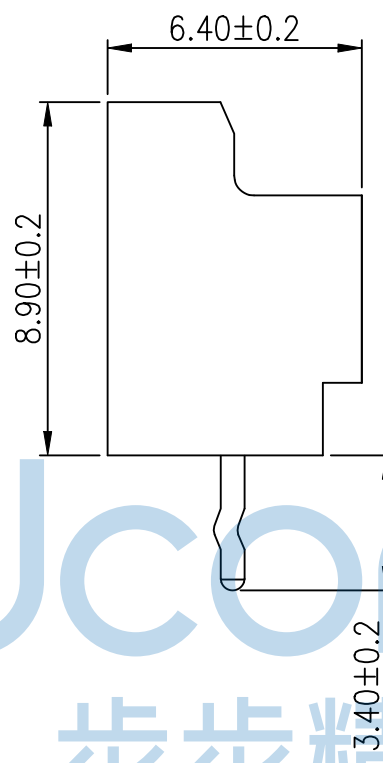
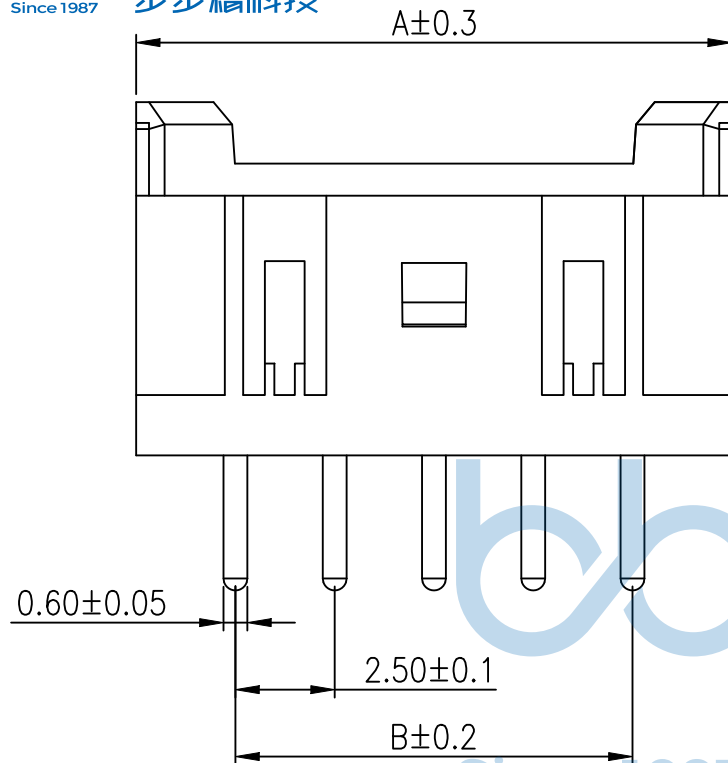


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				


使用温度范围 (Ambient temperature Range):-25° ~+85°
适用线规 (Applicable Wires):AWG 28#~22#
适用基板厚度 Applicable PCboard thickness):1.6mm
额定电压 (Voltage rating):250V AC,DC
额定电流 (Current rating):3A
接触电阻 Contact Resistance): 0.01
绝缘电阻 (Insulation Resistance): 1000M
耐压 (Withstand Voltange):800V/min
材料 (Material)
1. 基座: PA66 FV2 94V-2
2. 插针: 黄铜

孔位	A	B
2	7.5	2.5
3	10	5.0
4	12.5	7.5
5	15.0	10.0
6	17.5	12.5
7	20.0	15.0
8	22.5	17.5
9	25.0	20.0
10	27.5	22.5
11	30.0	25.0
12	32.5	27.5
13	35.0	30.0
14	37.5	32.5
15	40.0	35.0
16	42.5	37.5


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO:	0102-1	NAME:	针座 XA-2A(2.50-2P) 直针 打K脚 米黄色
APPD.	JM_Zheng	PJ. NO.:	123-295-020002-Y3G
CHKD.	LYX	SIZE:	A4 DRW NO.:
DR.	TSP	FINISH:	SEE NOTES
		MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	A0
		UNIT:	mm
		PAGE:	1/2

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

PE袋规格: 260*185

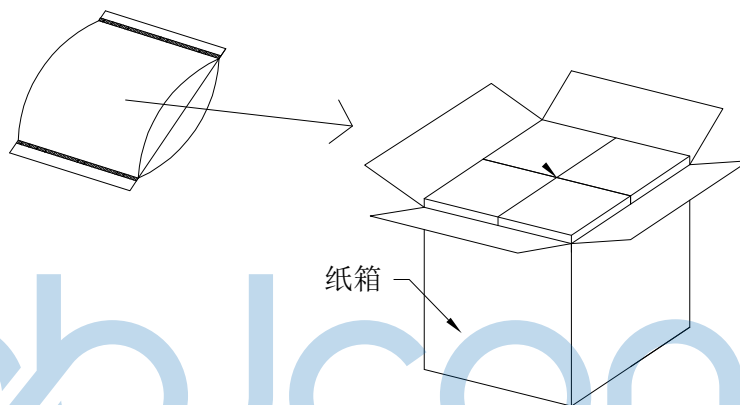

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: 针座 XA-2A(2.50-2P) 直针 打K脚 米黄色	
APPD.	JM_Zheng	PJ. NO.: 123-295-020002-Y3G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0102-1	DR. TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	