


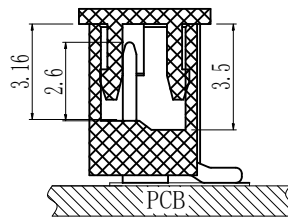




剖面 A-A

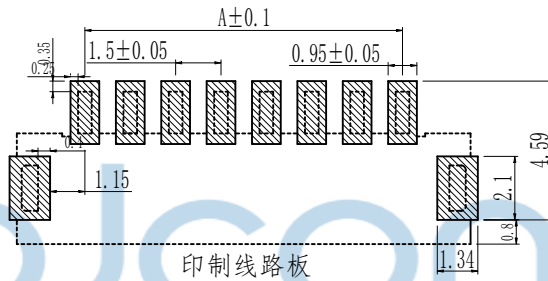

1. 技术参数:
- 1.1 额定电流: 1.0A AC/DC
 - 1.2 额定电压: 125V AC DC
 - 1.3 耐电压: 500V ACminute
 - 1.4 接触电阻: 20mΩ MAX
 - 1.5 绝缘电阻: 500MΩ MIN
2. 工作温度: -40℃~+105℃

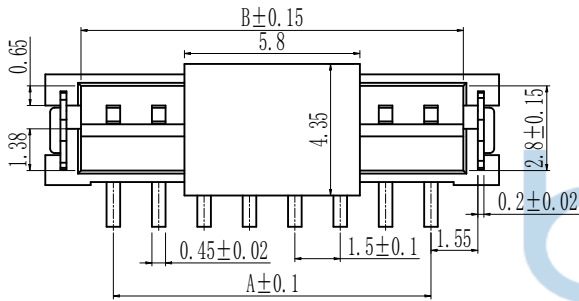

印制线路板

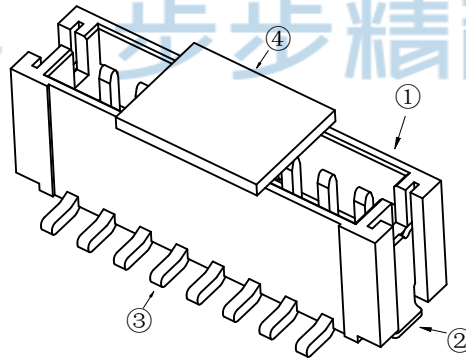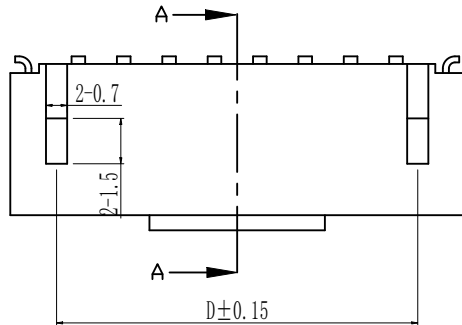

Circuits	Dimensions (mm)			
	A	B	C	D
2PIN	1.5	3.66	6.02	2.96
3PIN	3.0	5.16	7.52	4.46
4PIN	4.5	6.66	9.02	5.96
5PIN	6.0	8.16	10.52	7.46
6PIN	7.5	9.66	12.02	8.96
7PIN	9.0	11.16	13.52	10.46
8PIN	10.5	12.66	15.02	11.96
9PIN	12.0	14.16	16.52	13.46
10PIN	13.5	15.66	18.02	14.96
11PIN	15.0	17.16	19.52	16.46
12PIN	16.5	18.66	21.02	17.96
13PIN	18.0	20.16	22.52	19.46
14PIN	19.5	21.66	24.02	20.96
15PIN	21.0	23.16	25.52	22.46
16PIN	22.5	24.66	27.02	23.96

NO	物料名称	数量 (PCS)	材质	镀涂
①	塑胶件	1 PCS	VicrystR8535	本色
②	盖板	1 PCS	VicrystR8535	本色
③	PIN针	2~16 PCS	黄铜H62	亮锡
④	焊片	2 PCS	黄铜H62	亮锡



电镀标准: 镍层: 0.5~1.2um 锡层: 2.5~3.5um





THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0013-1

深圳市步步精科技有限公司		NAME: 针座 1.5-16P 立贴 加盖 米黄色 镀锡 编带	
.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		PJ. NO.: 123-264-160001-T4G	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES MAT'L: SEE NOTES	
DR. ZY		SCALE: N/A REV.: AO UNIT: mm PAGE: 1/3	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	ZY



物料名称	规格型号	数量(PCS)	材质	镀涂
盖板	1.5	1	VicrystR8535	本色

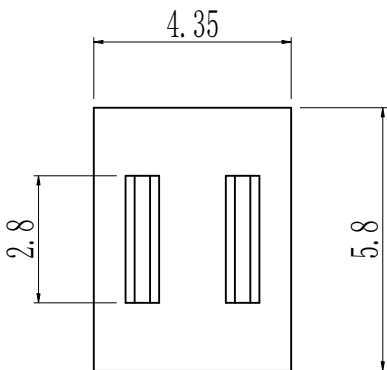

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0013-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 X": ±2"
.XXX: ±0.13 .XX': ±1"

NAME:
针座 1.5-16P 立贴 加盖 米黄色 镀锡 编带

APPD. JM_Zheng

PJ. NO.: 123-264-160001-T4G





CHKD. LYX

SIZE: A4 DRW NO.:

DR. ZY

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3

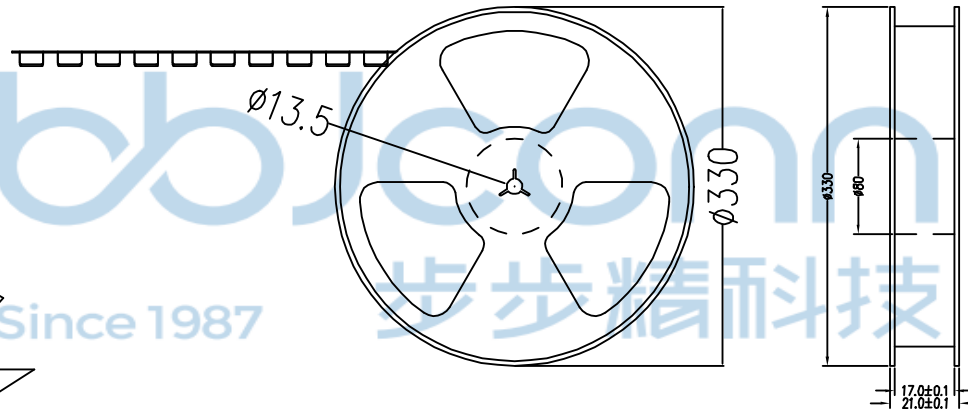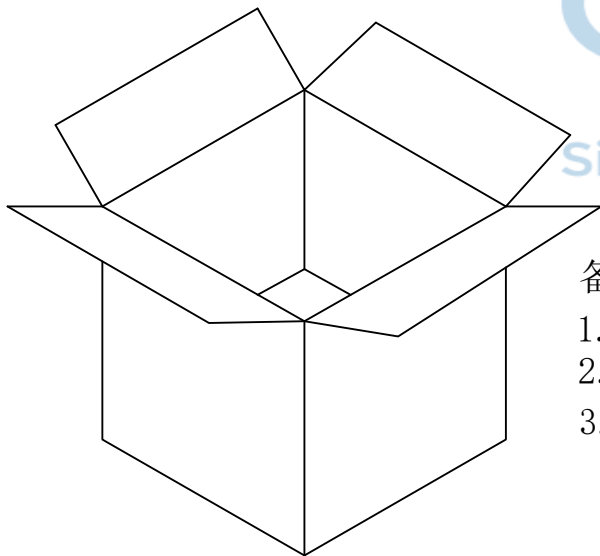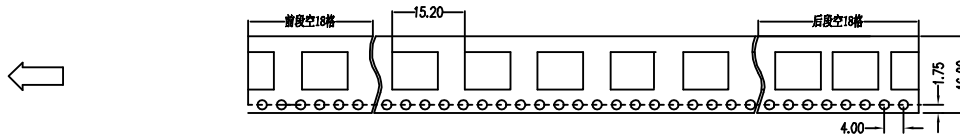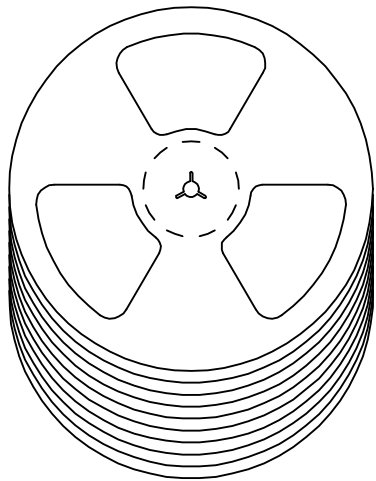

备注:

- 包装数量: 1000/PCS/卷, 10卷/箱。
- 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 材质:
 - 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
 - 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
 - 卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0013-1		深圳市步步精科技有限公司		NAME: 针座 1.5-16P 立贴 加盖 米黄色 镀锡 编带	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		P.J. NO.: 123-264-160001-T4G	
APPD. JM_Zheng		CHKD. LYX		SIZE: A4 DRW NO.:	
DR. ZY		FINISH: SEE NOTES		MAT'L: SEE NOTES	
		SCALE: N/A		REV.: A0	
		UNIT: mm		PAGE: 3/3	