


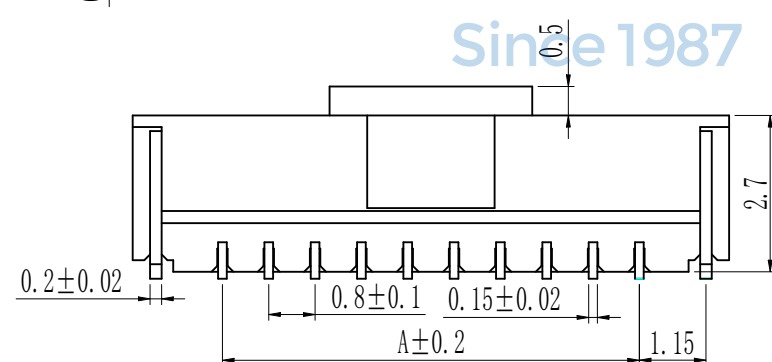
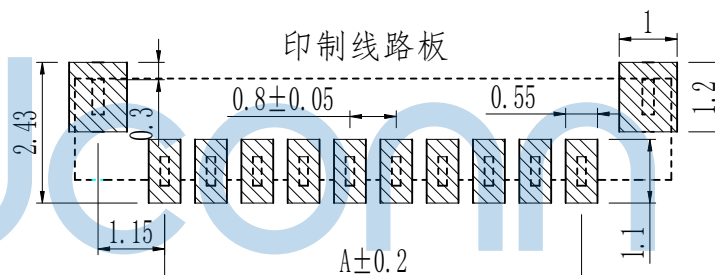
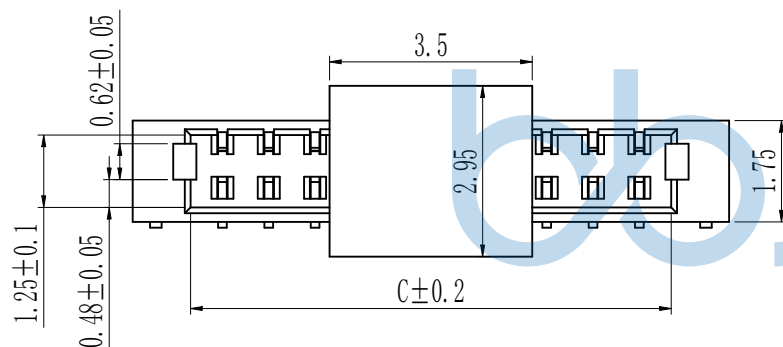


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

1. 技术参数:

- 1.1 额定电流: 0.5A AC/DC
- 1.2 额定电压: 50V AC/DC
- 1.3 耐电压: 500V ACminute
- 1.4 接触电阻: 20mΩ MAX
- 1.5 绝缘电阻: 100MΩ MIN
2. 工作温度: -40℃~+105℃

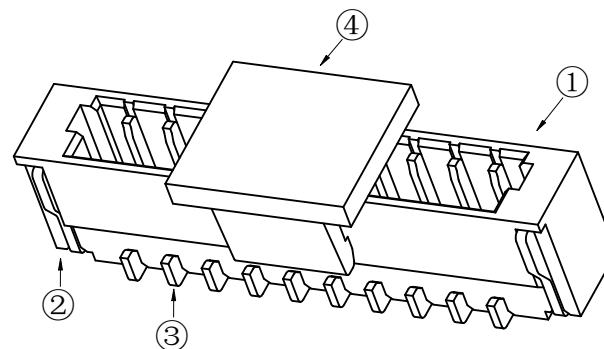





Circuits	Dimensions (mm)		
	A	B	C
2PIN	0.80	3.90	1.90
3PIN	1.60	4.70	2.70
4PIN	2.40	5.50	3.50
5PIN	3.20	6.30	4.30
6PIN	4.00	7.10	5.10
7PIN	4.80	7.90	5.90
8PIN	5.60	8.70	6.70
9PIN	6.40	9.50	7.50
10PIN	7.20	10.30	8.30
11PIN	8.00	11.10	9.10
12PIN	8.80	11.90	9.90
13PIN	9.60	12.70	10.70
14PIN	10.40	13.50	11.50
15PIN	11.20	14.30	12.30
16PIN	12.00	15.10	13.10

NO	物料名称	数量 (PCS)	材质	镀涂
①	塑胶件	1 PCS	LCP	本色
②	焊片	2 PCS	磷铜C5191	亮锡
③	PIN针	2~16 PCS	磷铜C5191	亮锡
④	盖板	1 PCS	LCP	本色



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0013-1

深圳市步步精科技有限公司		NAME: 针座 0.8-7P 立贴 加盖 米黄色	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	APPD. JM_Zheng	PJ. NO.: 123-234-070001-T4G
CHKD. LYX		FINISH: SEE NOTES	MAT'L.: SEE NOTES
DR. TSP		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

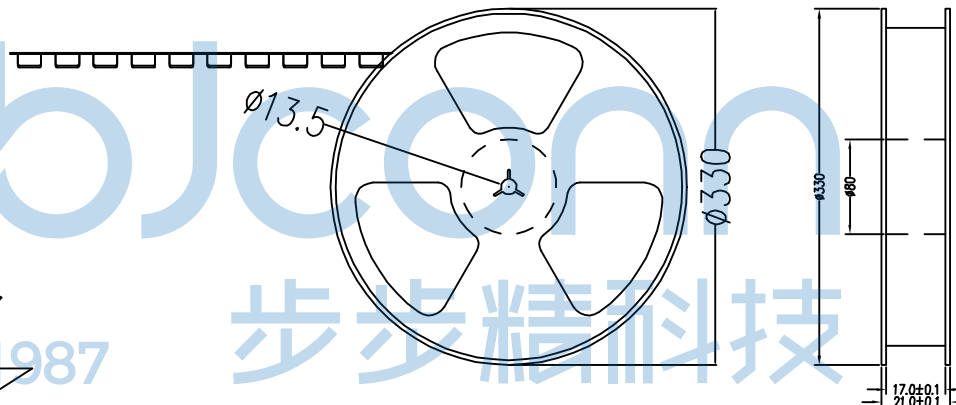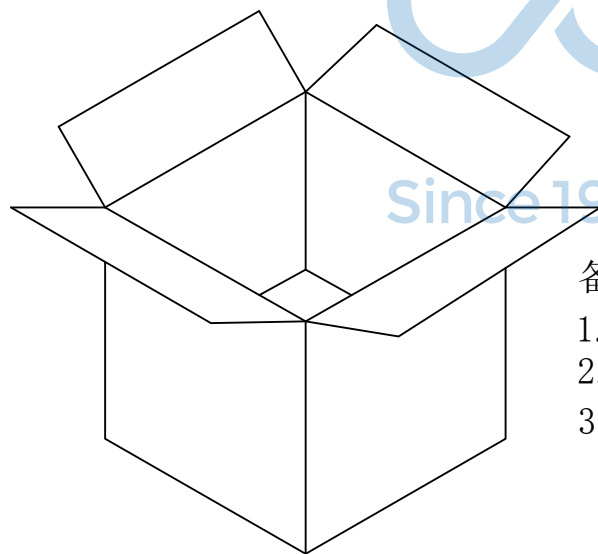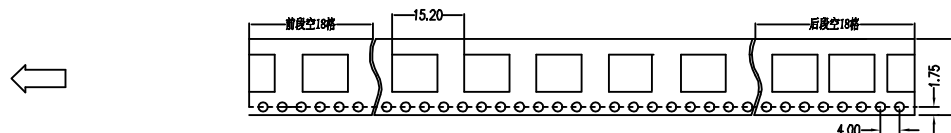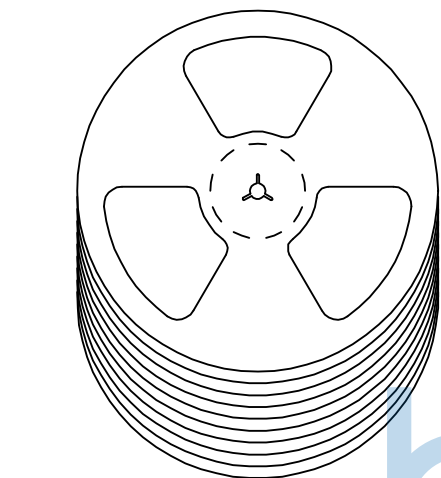

备注:

1. 包装数量: 2000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) ,
上带: 聚乙烯 (PET) ,
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: 针座 0.8-7P 立贴 加盖 米黄色	
APPD. JM_Zheng		PJ. NO.: 123-234-070001-T4G	
CHKD. LYX		SIZE: A4 DRW NO.:	
DR. TSP		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0013-1		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	