
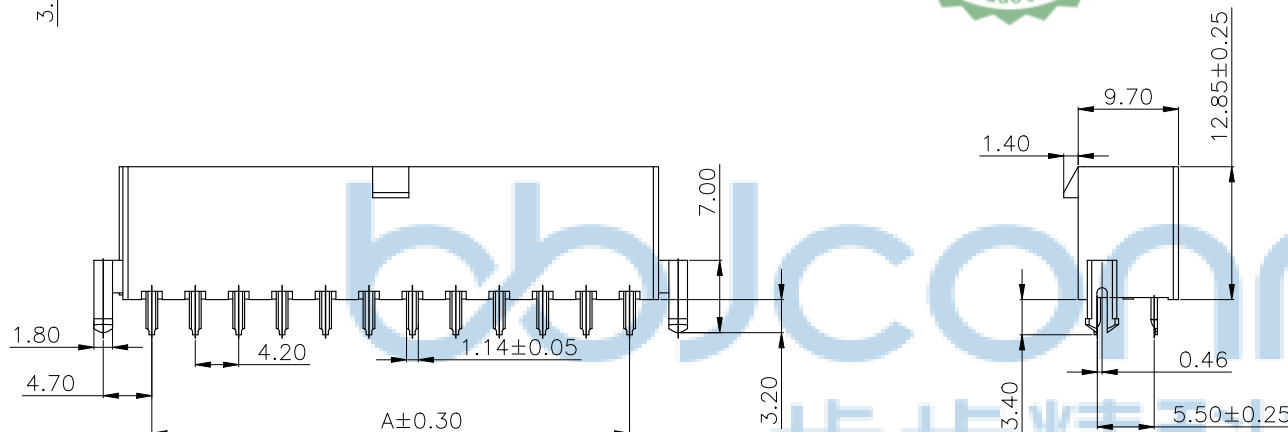
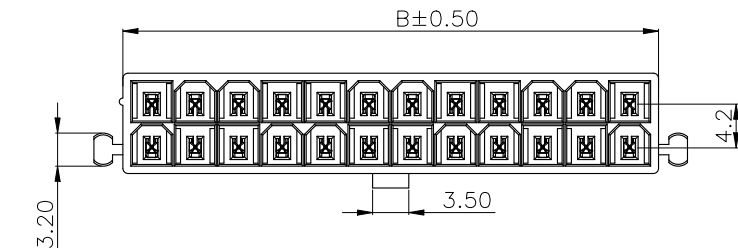


P.C.B LAYOUT

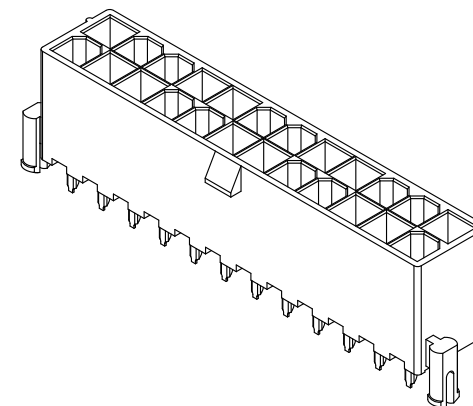

SPECIFICATIONS :
 Voltage Rating: 600V AC / DC
 Current Rating: 9A AC / DC
 Withstanding Voltage: 1500V AC/minute
 Temperature Range: -25℃~+85℃
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 After environmental testing: 40mΩ Max.
 Material:
 Wafer: PA66
 Color: White
 Conductor: Brass

Poles	Dimensions (mm)	
	A	B
02	---	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

THIS DOCUMENT IS THE
 SOLE PROPERTY OF
 BBJconn Technology Co.,Ltd.
 Corporation AND SHOULD
 NOT BE USED IN WHOLE
 PRIOR WRITTEN PERMISSION.

PDWG NO: 0483-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
 .XX: ±0.25 .X': ±2'
 .XXX: ±0.13 .XX': ±1'

APPD JM_Zheng

CHKD LYX

DR SGF









NAME: 针座 4.2-2x4P 双排直针 空心针
 带扣 带外柱 白色 袋装

PJ NO: 123-2C5-080001-G7G

SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV: A0 UNIT: mm PAGE: 1/2

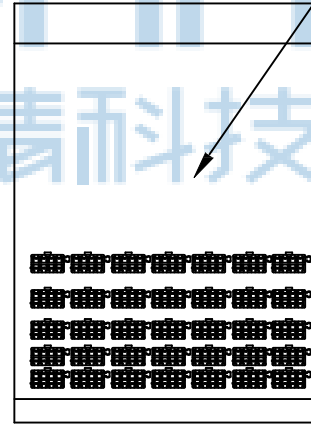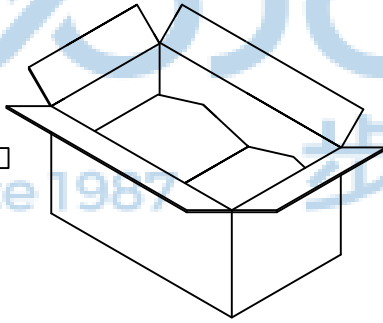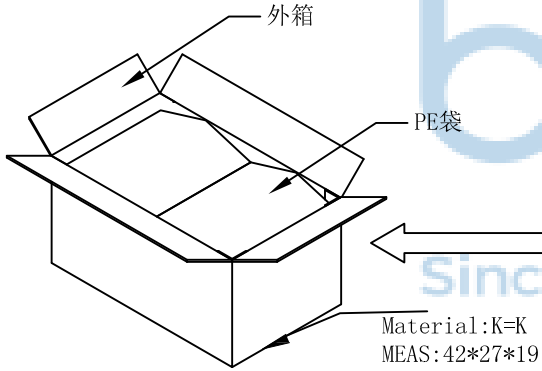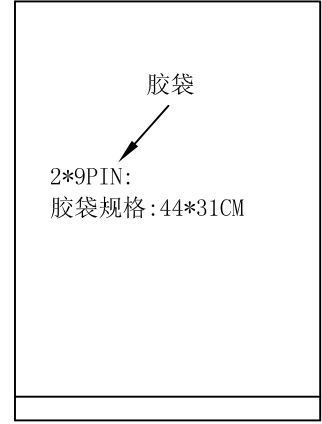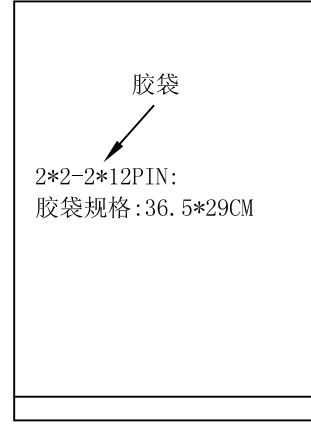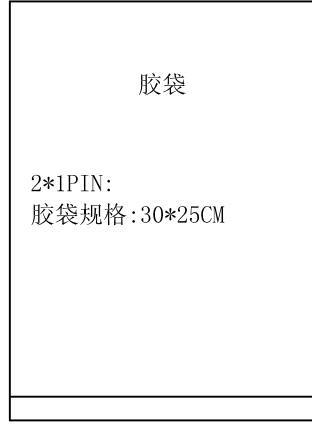

2*1-2*3PIN:1000PCS/袋
2*4-2*9PIN:500PCS/袋
2*10-2*12PIN:200PCS/袋

1 Kpcs	0.2Kpcs	2*12P
1 Kpcs	0.2Kpcs	2*11P
1.2 Kpcs	0.2Kpcs	2*10P
1.5Kpcs	0.5Kpcs	2*9P
2.0Kpcs	0.5Kpcs	2*8P
2.0Kpcs	0.5Kpcs	2*7P
2.0Kpcs	0.5Kpcs	2*6P
3 Kpcs	0.5Kpcs	2*5P
3.5Kpcs	0.5Kpcs	2*4P
5 Kpcs	1Kpcs	2*3P
8 Kpcs	1Kpcs	2*2P
10 Kpcs	1Kpcs	2*1P
PCS/Carton		PCS/Bag
		POS

注意事项:

- 袋装产品封口前需放1-2包干燥剂于内;
- 产品不可少数、多数;
- 内外包装均需有数量标签;
- 不同PIN位包装时须分开放置不可装入同一外箱中。
- 同一订单尾数包装需用不影响品质之物品填充并注明尾数。
- 同一订单不够一箱可使用小号外箱包装



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0483-1



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

APPD JM_Zheng
CHKD LYX

DR

SIZE: A4

REV: A0

NAME: 针座 4.2-2x4P 双排直针 空心针
带扣 带外柱 白色 袋装

PJ NO: 123-2C5-080001-G7G

DRW NO:

FINISH: SEE NOTES

SCALE: N/A

MAT'L: SEE NOTES

UNIT: mm

PAGE: 2/2