

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	GZY

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$;
- 3、额定电压: 150V, AC, DC(等效);
- 4、接触电阻: $\leq 0.03\Omega$;
- 5、绝缘电阻: $\geq 1000\text{M}\Omega$;
- 6、耐压: 800V, AC/minute.

ROHS管理规定:



- 1、禁止使用含有ROHS指令所限制的物质。
- 2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表,有效期一年。







孔位 poles	A	B	C
2	1	4.3	2.4
3	2	5.3	3.4
4	3	6.3	4.4
5	4	7.3	5.4
6	5	8.3	6.4
7	6	9.3	7.4
8	7	10.3	8.4
9	8	11.3	9.4
10	9	12.3	10.4
11	10	13.3	11.4
12	11	14.3	12.4
13	12	15.3	13.4
14	13	16.3	14.4
15	14	17.3	15.4
16	15	18.3	16.4

3	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡 80u"MIN.
2	端子 Contact	磷青铜 Phosphor Bronze	n*1	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡 80u"MIN.
1	基座 Wafer	LCP (UL94V-0)	1	本色
序号	名称	材料	数量	附注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$		NAME: 针座 1.0-2P 卧贴 LCP本色 编带			
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: 123-241-020001-Y3G		SIZE: A4 DRW NO.:	
PDWG.NO: 0510-1		DR. GZY		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
				SCALE: N/A		REV.: A0	
				UNIT: mm		PAGE: 1/2	

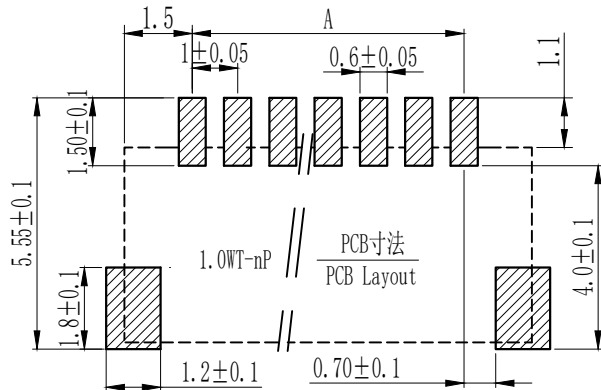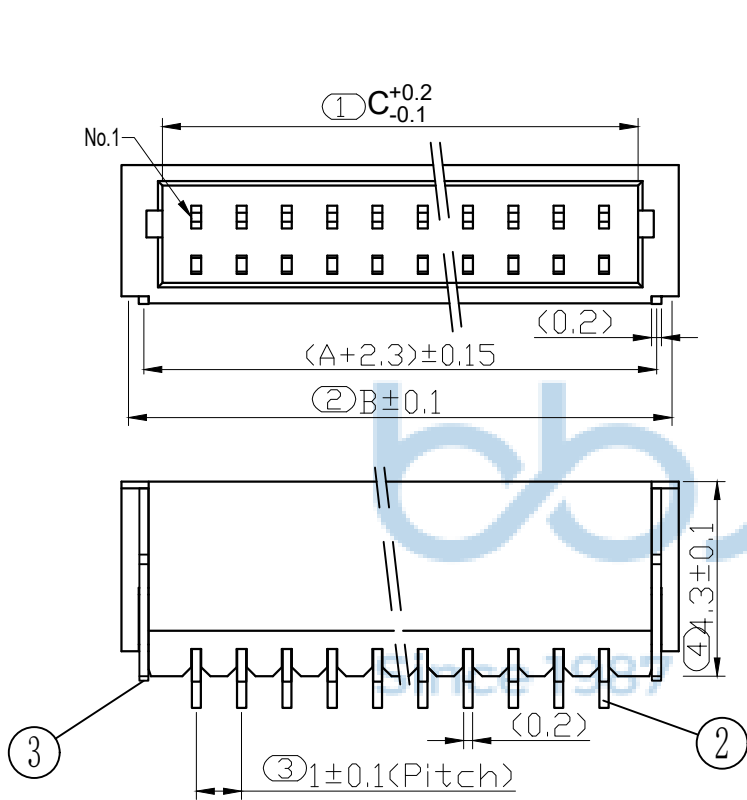

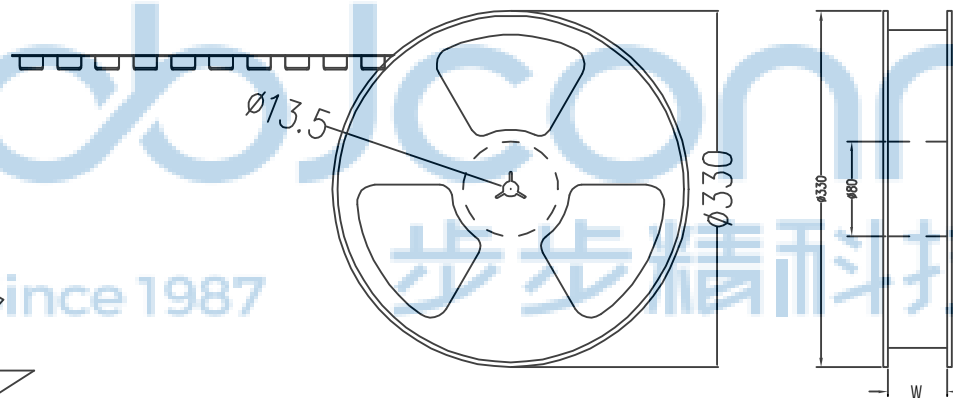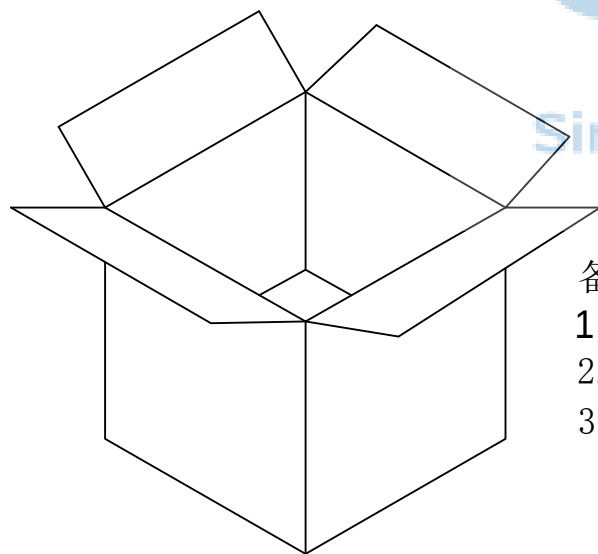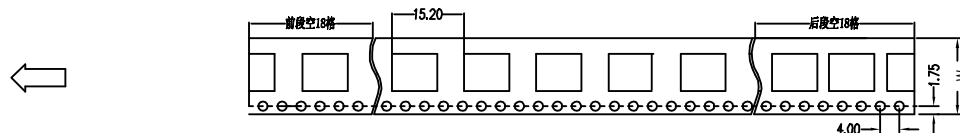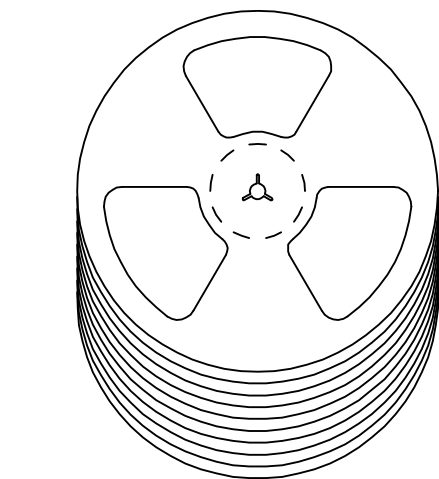

备注:

1. 包装数量：2000/PCS/卷，10卷/箱
2. 包装袋长度：每卷前后各空10-20个空格，中间包装。
3. 材质：
载体：聚丙烯（PS），
上带：聚乙烯（PET），
卷盘：聚苯乙烯。

纸箱规格：345*345*23MM

纸箱规格：345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X": ±3" .X": ±2" .XX": ±1"	NAME: 针座 1.0-2P 卧贴 LCP本色 编带	
APPD.	JM_Zheng	PJ. NO.: 123-241-020001-Y3G	
CHKD.	LYX	SIZE: A4 DRW NO.:	
PDWG.NO: 0510-1	DR.	GZY	FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2