
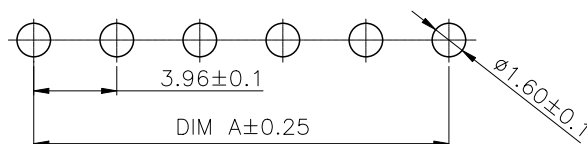

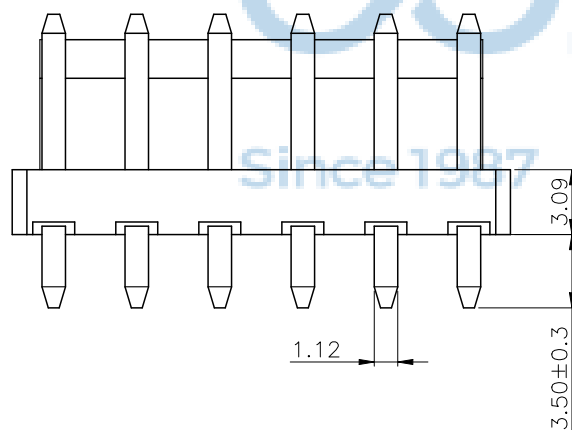
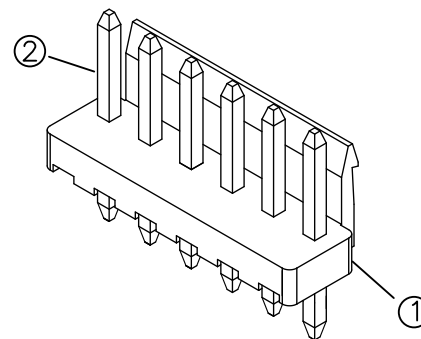


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

技术要求:

- 1、塑件材料: PA66 (UL-94V-0) 白色
- 2、接触件: 黄铜镀锡
- 3、接触电阻: $\leq 20\text{m}\Omega$
- 4、绝缘电阻: $\geq 1000\text{M}\Omega$
- 5、额定电压: 250V AC DC
- 6、额定电流: 7.0A AC DC
- 7、耐压: 能承受1000V AC/Minute
- 8、工作温度: $-25^{\circ}\sim +105^{\circ}$
- 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 $235^{\circ}\pm 5^{\circ}$, 时间 2.5 ± 0.5 秒
- 10、铅和镉等六大有害物质含量要符合环保要求

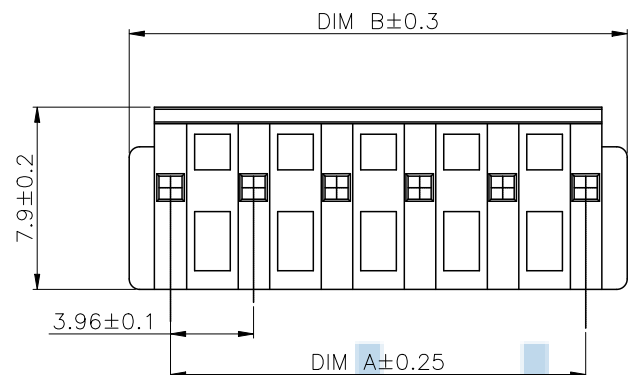

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions (mm)	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR SGF


NAME:
针座 VH3.96-5P 直针 过电流7A 白色 袋装

PJ NO: 123-2J5-050005-Y3G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

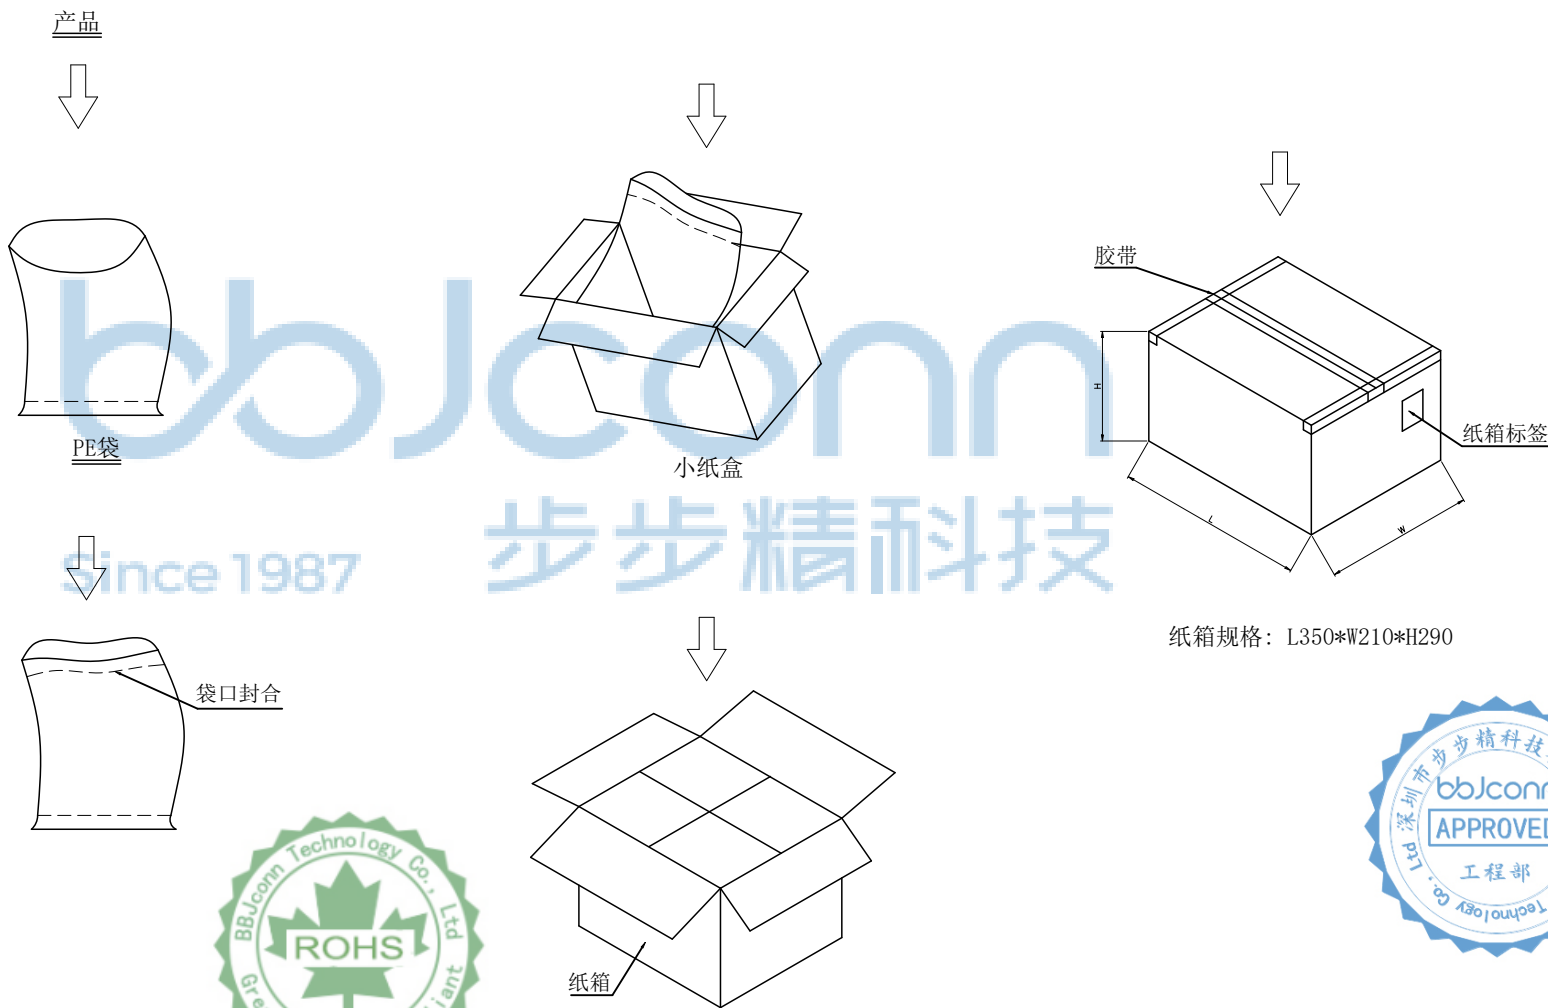

- 1、包装要求:
- 1.1 PE袋包装1000pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
 - 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1



深圳市步步精科技有限公司

.X: ±0.38 X*: ±3"
.XX: ±0.25 .X*: ±2"
.XXX: ±0.13 .XX*: ±1"

APPD JM_Zheng
CHKD LYX

DR

NAME: 针座 VH3.96-5P 直针 过电流7A 白色 袋装

PJ NO: 123-2J5-050005-Y3G
SIZE:A4 DRW NO:

SGF

FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE:2/2