
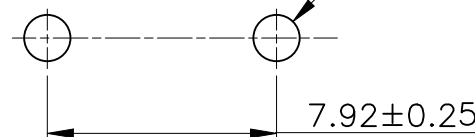
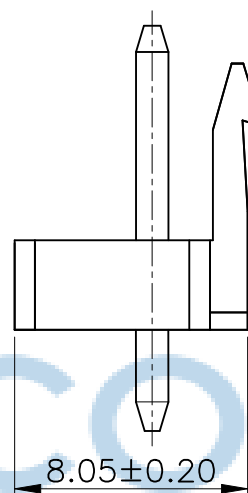



REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	GZY

技术参数:

- 1、额定电流: 7A, AC, DC;
- 2、额定电压: 250V, AC, DC;
- 3、温度范围: $-25^{\circ}\text{C}\sim+105^{\circ}\text{C}$;
- 4、接触电阻: $\leq 0.02\Omega$;
- 5、绝缘电阻: $\geq 1000\text{M}\Omega$;
- 6、耐压: 1500V, AC/minute.

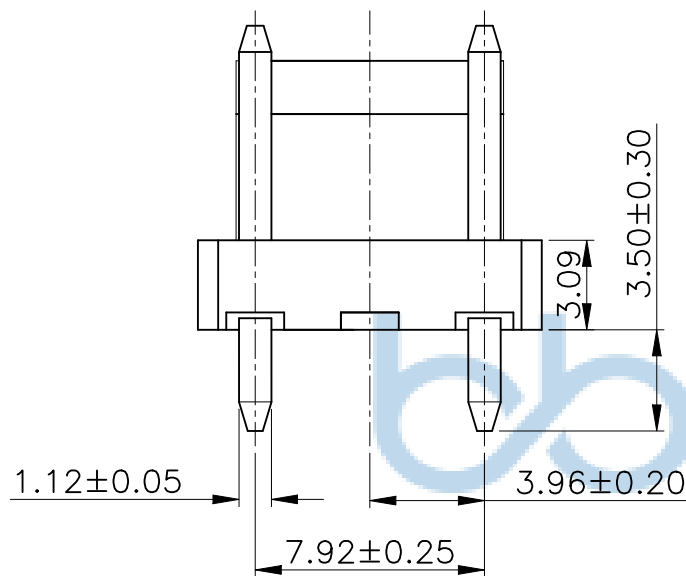


SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

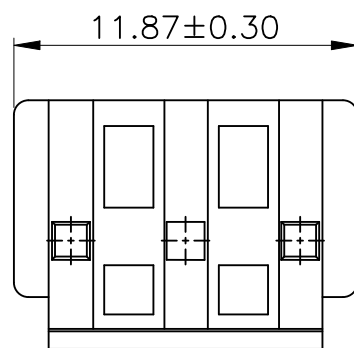

2	端子 Contact	黄铜	n*1	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡 80u"MIN.
1	基座 Wafer	PA66 (UL94V-0)	1	红色
序号	名称	材料	数量	备注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO:0510-1		深圳市步步精科技有限公司				
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3° .X': ±2° .XX': ±1°		
	NAME: 针座 VH-3A2T (3.96-3P) 中间空1P 耐高温 红色 袋装					
	APPD	JM_Zheng		PJ NO: 123-2J5-030002-Y3G		
	CHKD	LYX		SIZE:A4	DRW NO:	
		FINISH:SEE NOTES		MAT'L:SEE NOTES		
		SCALE:N/A		REV:A0	UNIT:mm	PAGE:1/2
		DR		GZY		

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	GZY

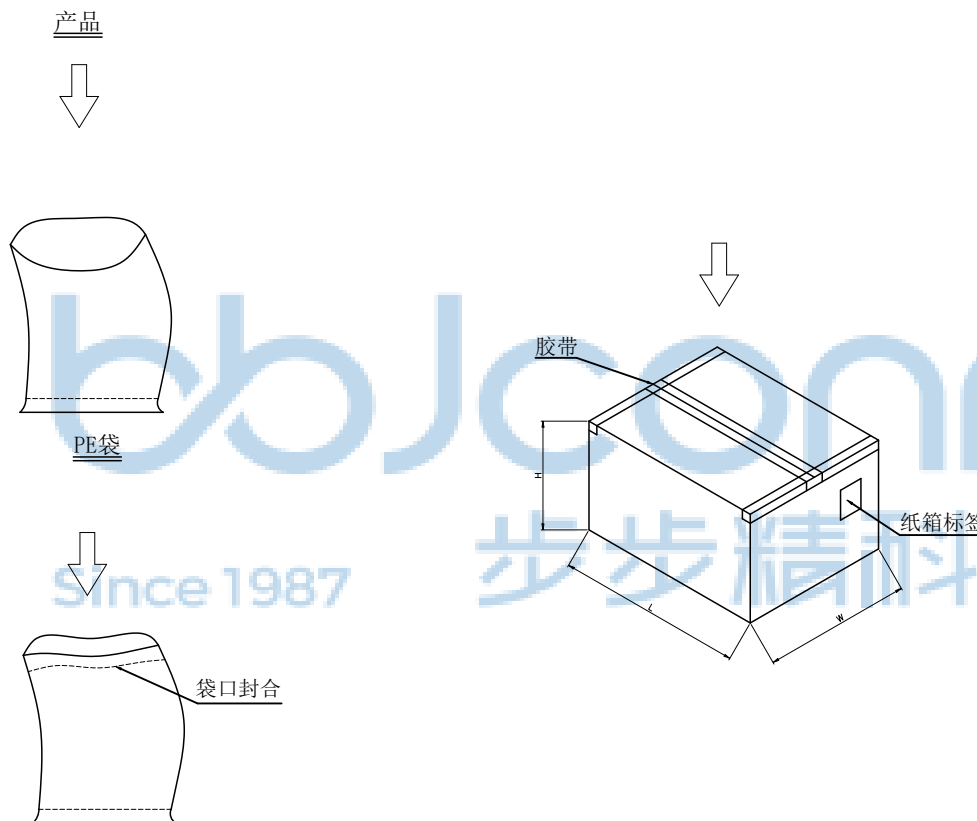

1、包装要求:

- 1.1 PE袋包装1000pcs;
- 1.2 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.3 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.			深圳市步步精科技有限公司		
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3' .X': ±2' .XX': ±1'			NAME: 针座 VH-3A2T (3.96-3P) 中间空1P 耐高温 红色 袋装		
APPD	JM_Zheng			PJ NO: 123-2J5-030002-Y3G	
CHKD	LYX			SIZE:A4	DRW NO:
PDWG NO:0510-1			FINISH:SEE NOTES		MAT'L:SEE NOTES
DR			GZY		SCALE:N/A
					REV:A0
					UNIT:mm
					PAGE:2/2