
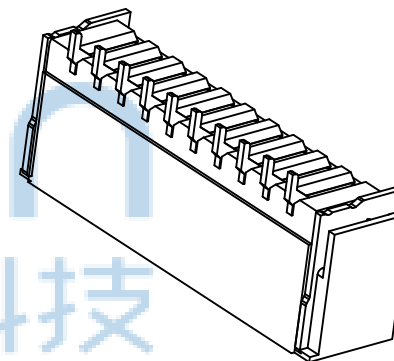
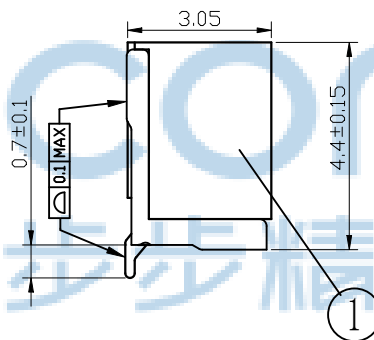




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$;
- 3、额定电压: 150V, AC, DC(等效);
- 4、接触电阻: $\leq 0.03\Omega$;
- 5、绝缘电阻: $\geq 1000\text{M}\Omega$;
- 6、耐压: 800V, AC/minute.




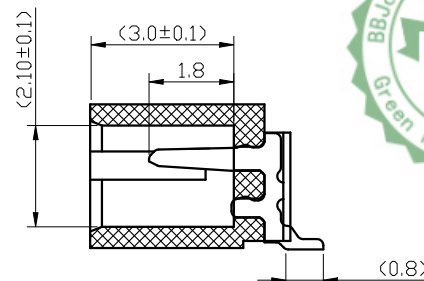


孔位 poles	A	B	C
2	1	4.3	2.4
3	2	5.3	3.4
4	3	6.3	4.4
5	4	7.3	5.4
6	5	8.3	6.4
7	6	9.3	7.4
8	7	10.3	8.4
9	8	11.3	9.4
10	9	12.3	10.4
11	10	13.3	11.4
12	11	14.3	12.4
13	12	15.3	13.4
14	13	16.3	14.4
15	14	17.3	15.4
16	15	18.3	16.4

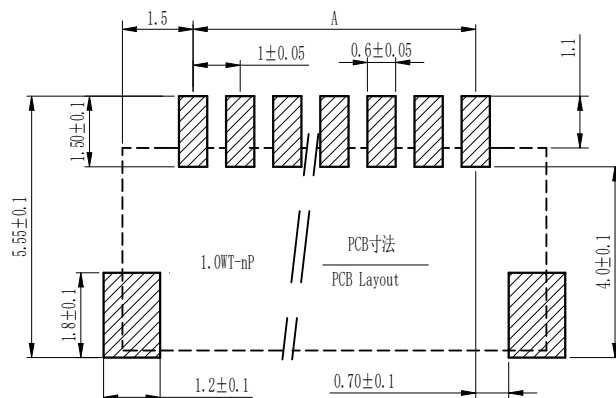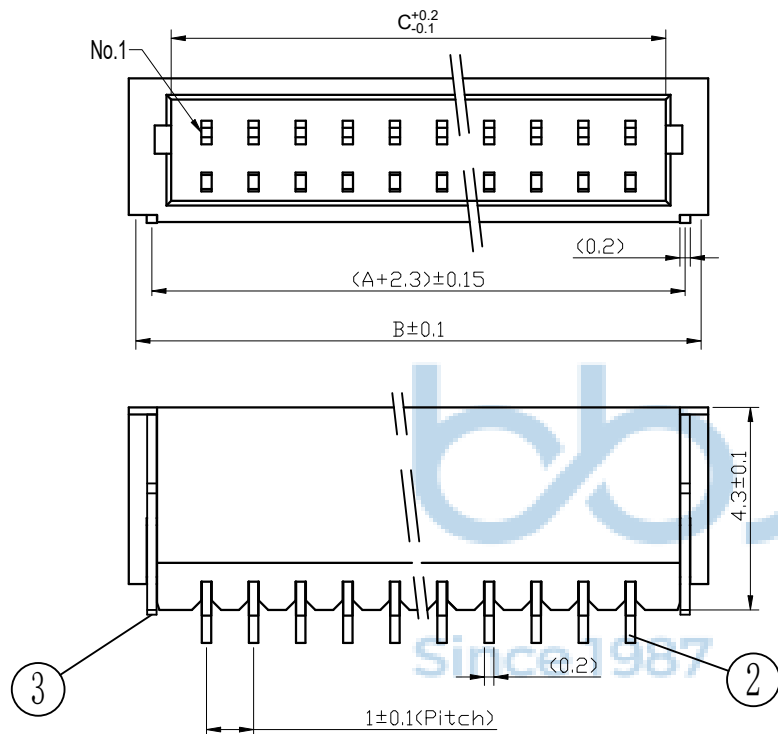

3	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡 80u"MIN.
2	端子 Contact	磷青铜 Phosphor Bronze	n*1	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡 80u"MIN.
1	基座 Wafer	LCP (UL94V-0)	1	黑色
序号	名称	材料	数量	附注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd.		深圳市步步精科技有限公司	
Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		NAME: 针座 SH 1.0-14P 卧贴 LCP黑色 编带	
PDWG.NO: 0510-1		P.J. NO.: 123-241-140001-Y3G	
DR. SGF		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

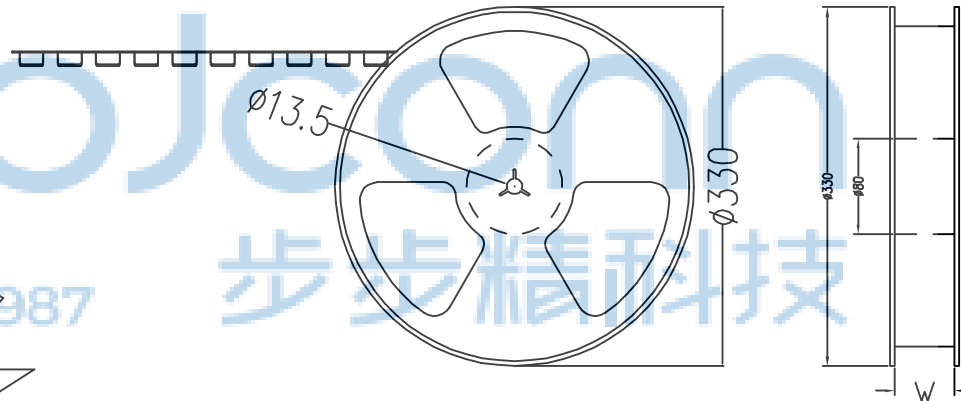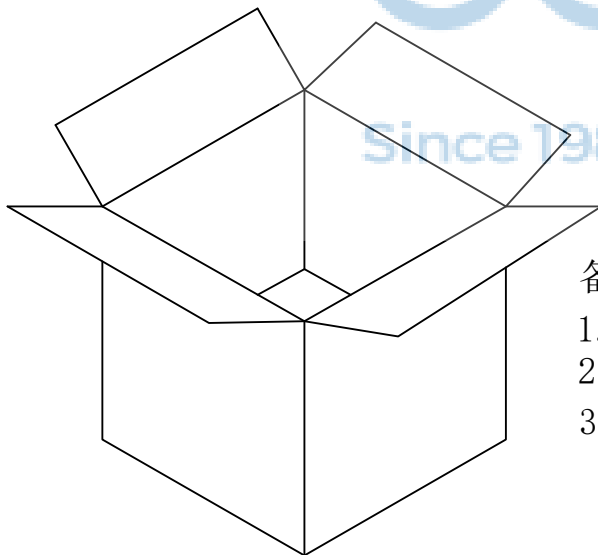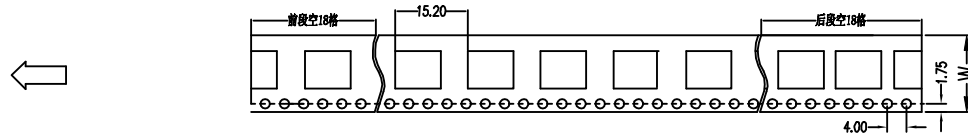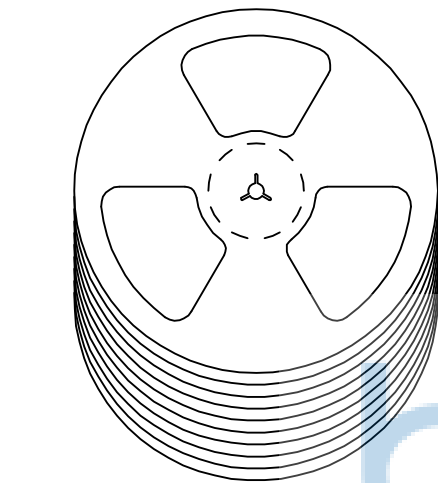

备注:

1. 包装数量: 2000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*230MM

纸箱规格: 345*345*350MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: 针座 SH 1.0-14P 卧贴 LCP黑色 编带	
APPD. JM_Zheng		P.J. NO.: 123-241-140001-Y3G	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0510-1		FINISH: SEE NOTES MAT'L: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	