

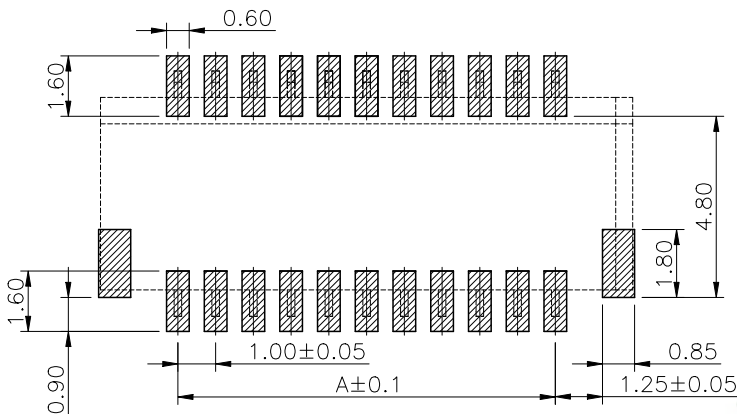
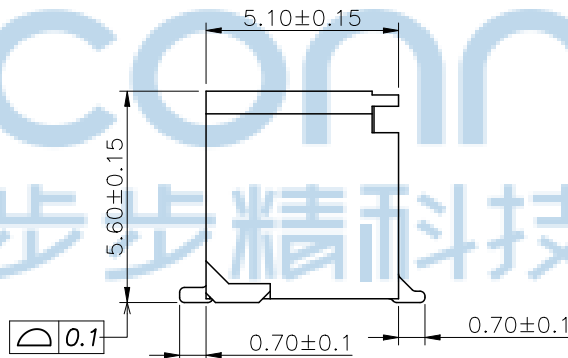
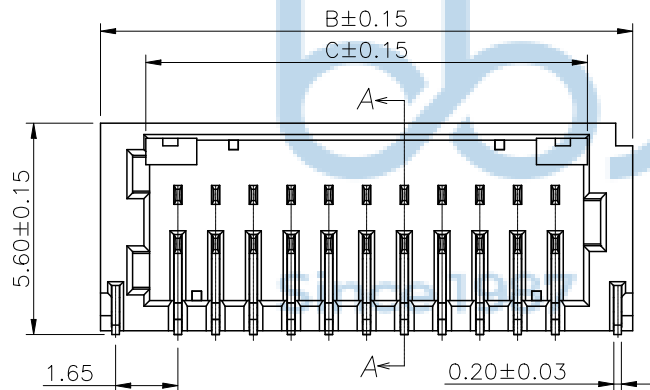
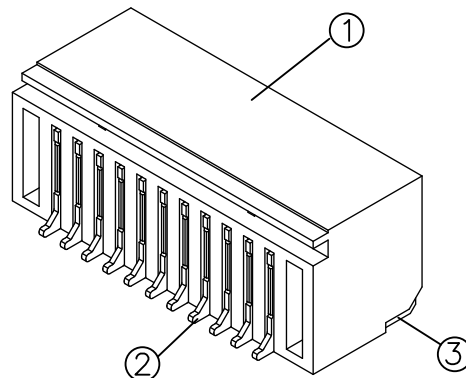


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

技术参数:

- 1、所有材料符合ROHS2.0/REACH要求。
- 2、额定电流: 1A, AC, DC;
- 3、额定电压: 50V, AC, DC;
- 4、温度范围: -25℃~+85℃;
- 5、接触电阻: $\leq 0.02\Omega$;
- 6、绝缘电阻: $\geq 100M\Omega$;
- 7、耐压: 500V, AC/minute.

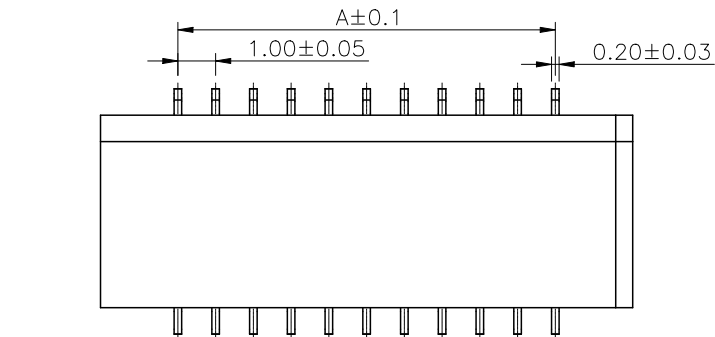

SECTION A-A

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions (mm)		
	A	B	C
2×4	3.00	7.10	4.50
2×5	4.00	8.10	5.50
2×6	5.00	9.10	6.50
2×7	6.00	10.10	7.50
2×8	7.00	11.10	8.50
2×9	8.00	12.10	9.50
2×10	9.00	13.10	10.50
2×11	10.00	14.10	11.50
2×15	14.00	18.10	15.50
2×20	19.00	23.10	20.50
2×25	24.00	28.10	25.50
2×30	29.00	33.10	30.50

3	焊片	磷铜	2	镀锡
2	端子	磷铜	n*1	镀金
1	底座	LCP (UL94V-0)	1	米黄色
序号	名称	材料	数量	附注



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X'': ±2'
.XXX: ±0.13 .X''': ±1'

APPD JM_Zheng

CHKD LYX

DR

NAME: 针座 1.0-2x11P 双排 卧贴 不带扣
米黄色 镀金 编带

PJ NO: 123-241-220001-Y3G

SIZE:A4 DRW NO:




FINISH:SEE NOTES

SCALE:N/A

MAT'L:SEE NOTES


UNIT:mm

PAGE:1/2

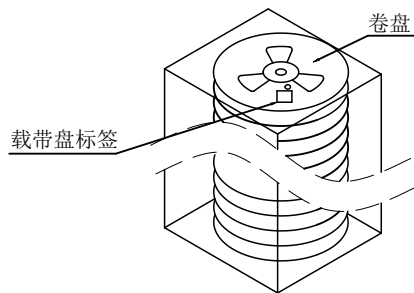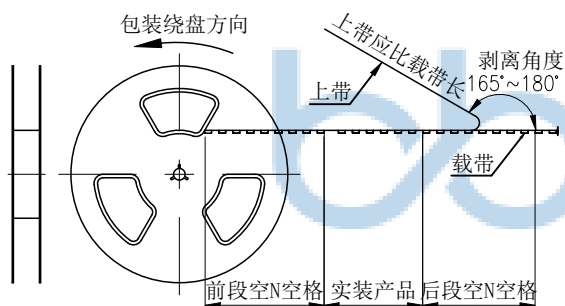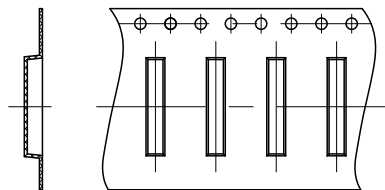

备注:

- 1、包装数量: 900/PCS/卷, 10卷/箱。
- 2、包装袋长度: 每卷前后各空10~20个空格, 中间包装。
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

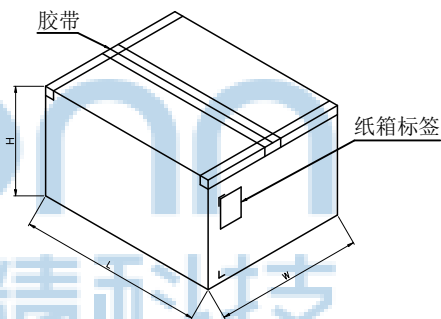

纸箱规格: W345*L345*H230MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$ X'': $\pm 2'$ XX': $\pm 1'$
APPD	JM_Zheng	NAME: 针座 1.0-2x11P 双排 卧贴 不带扣 米黄色 镀金 编带	
CHKD	LYX	PJ NO: 123-241-220001-Y3G SIZE:A4 DRW NO:	
PDWG NO: 0510-1		FINISH:SEE NOTES	MAT'L:SEE NOTES
DR		SCALE:N/A	REV:A0
		UNIT:mm	PAGE:2/2