
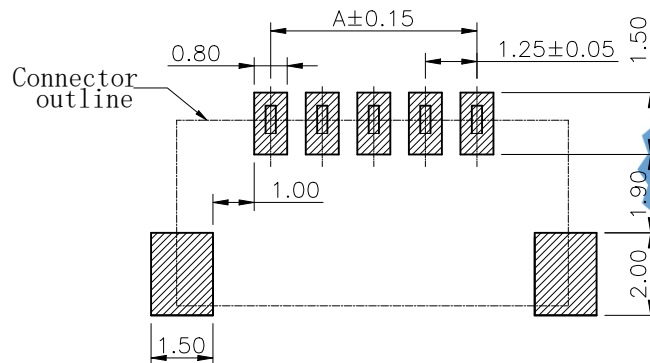





REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

技术要求:

- 1、接触电阻: $\leq 20\text{m}\Omega$
- 2、绝缘电阻: $\geq 100\text{M}\Omega$
- 3、额定电压: 50V AC DC
- 4、额定电流: 1.0A AC DC
- 5、耐压: 能承受500V AC/Min ute
- 6、工作温度: $-25^{\circ}\sim +105^{\circ}$
- 7、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 $260^{\circ}\pm 5^{\circ}$, 时间 2.5 ± 0.5 秒
- 8、铅和镉等六大有害物质含量要符合环保要求


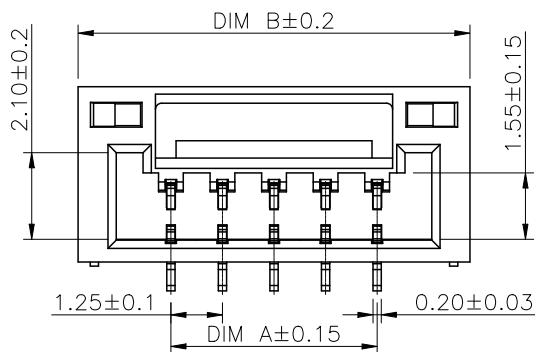


SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

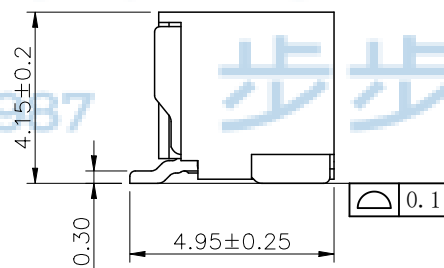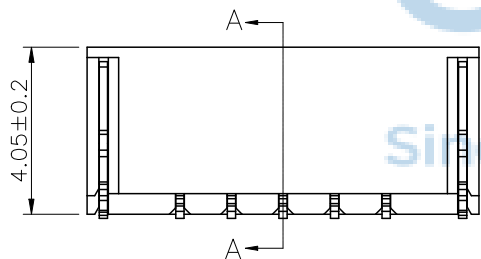

SECTION A-A

Circuits	Dimensions (mm)	
	A	B
02	1.25	5.75
03	2.50	7.00
04	3.75	8.25
05	5.00	9.50
06	6.25	10.75
07	7.50	12.00
08	8.75	13.25
09	10.00	14.50
10	11.25	15.75
11	12.50	17.00
12	13.75	18.25
13	15.00	19.50

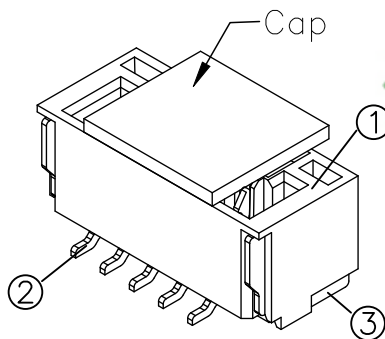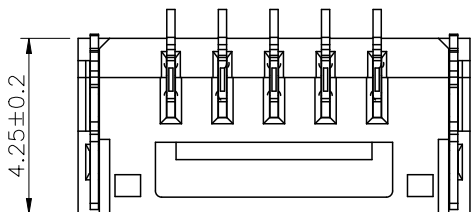

3	焊片	磷青铜	2	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u". MIN.
2	端子	磷青铜	n*1	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡80u". MIN.
1	基座	LCP (UL94V-0)	1	红色
序号	名称	材料	数量	附注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR SGF

NAME:

针座 GH1.25-4P 立贴 加盖 带扣 红色 编带




PJ NO: 123-254-040001-Y3G


SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES


SCALE:N/A REV:A0 UNIT:mm PAGE:1/3




2P




3P




4P




5P



6P



7P




8P



9P




10P




11P




12P

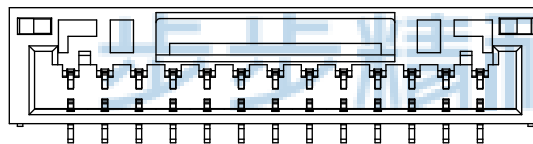


13P

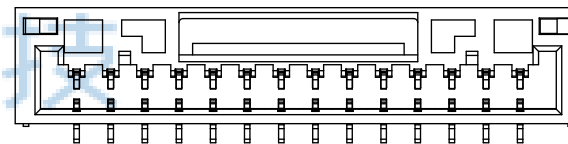


14P

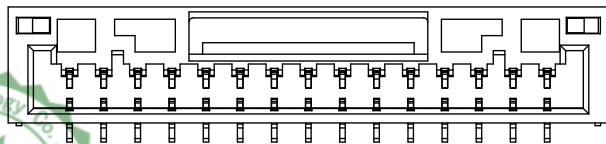


15P

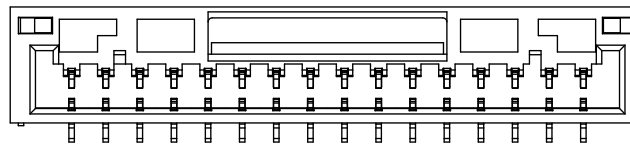

16P

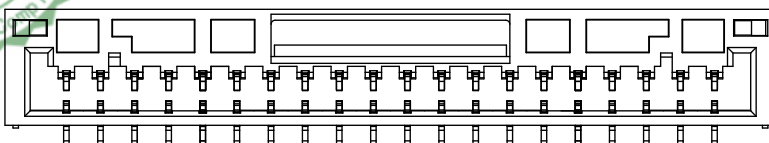

20P



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1

深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR SGF




NAME:
针座 GH1.25-4P 立贴 加盖 带扣 红色 编带

PJ NO: 123-254-040001-Y3G

SIZE:A4 DRW NO:


FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:2/3

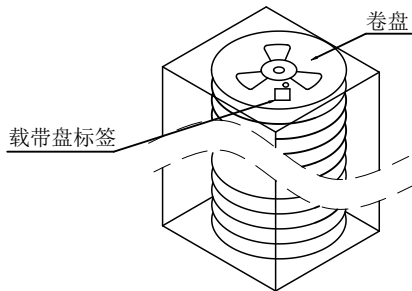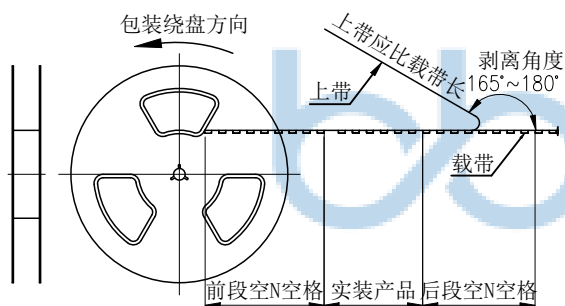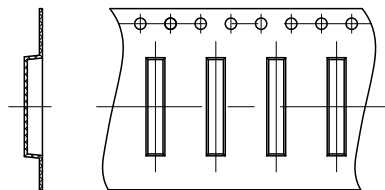

备注:

- 1、包装数量: 1000/PCS/卷, 10卷/箱。
- 2、包装袋长度: 每卷前后各空10~20个空格, 中间包装。
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

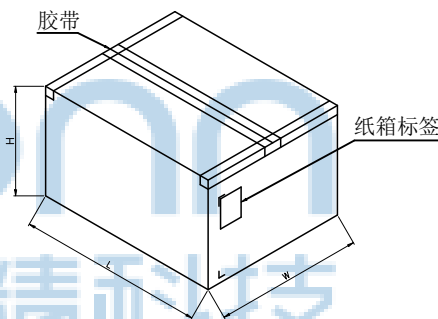

纸箱规格: W345*L345*H230MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0510-1		深圳市步步精科技有限公司			
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$	NAME: 针座 GH1.25-4P 立贴 加盖 带扣 红色 编带	
		APPD	JM_Zheng		PJ NO: 123-254-040001-Y3G
		CHKD	LYX	SIZE:A4	DRW NO:
		DR	SGF	FINISH:SEE NOTES	MAT'L:SEE NOTES
				SCALE:N/A	REV:A0
				UNIT:mm	PAGE:3/3