


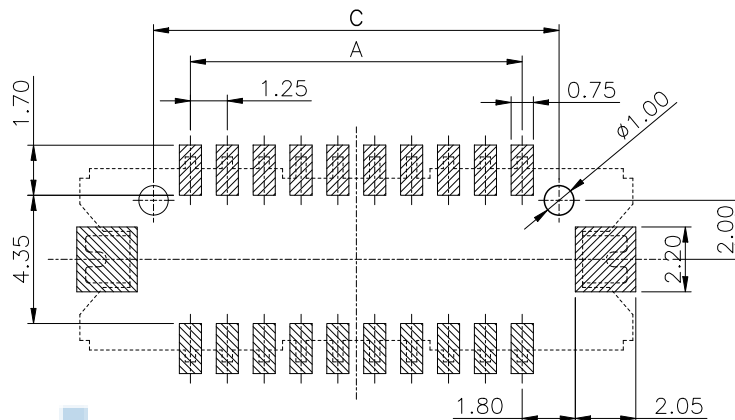
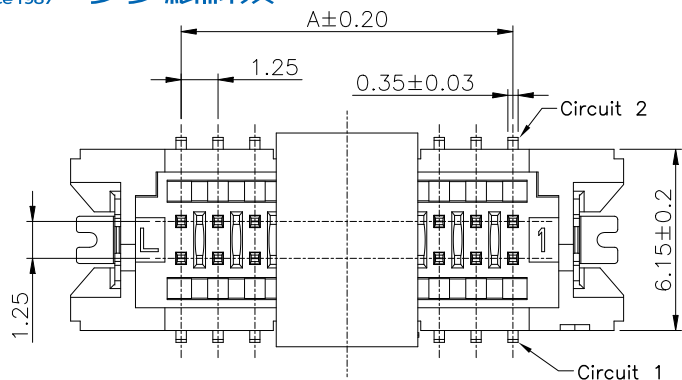
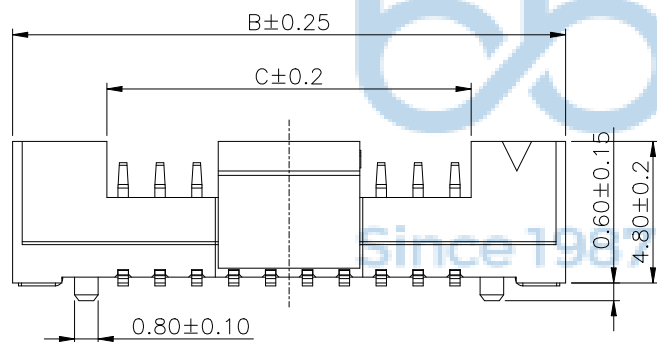


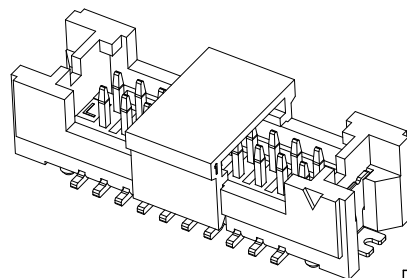

Specifications:
 Poles: 10 to 50
 Contact resistance: $\leq 30m\Omega$
 Insulation resistance: $\geq 500M\Omega$
 Rated voltage: 150V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$
 Housing: PA9T UL94V-0, Natural (Beige)
 CAP: PA9T UL94V-0, Natural (Beige)
 Contacts: Brass Sn-plated/Gold
 Solder Tabs: Brass Sn-plated/Gold

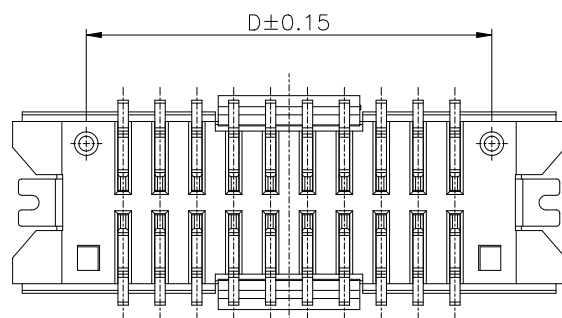

SUGGESTED PCB LAYOUT



Circuits	Dimensions (mm)			
	A	B	C	D
2×05P	5.00	12.50	6.10	7.50
2×10P	11.25	18.75	12.35	13.75
2×15P	17.50	25.00	18.60	20.00
2×20P	23.75	31.25	24.85	26.25
2×25P	30.00	37.50	31.10	32.50

THIS DOCUMENT IS THE
 SOLE PROPERTY OF
 BBJconn Technology Co., Ltd.
 Corporation AND SHOULD
 NOT BE USED IN WHOLE
 PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
 .XX: ±0.25 .X': ±2'
 .XXX: ±0.13 .XX': ±1'

APPD JM_Zheng

CHKD LYX

DR SGF




NAME: 针座 1.25-2x25P 双排 立贴
 带柱 米黄色 加盖 编带

PJ NO: 123-254-500001-Y3G




SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV: A0 UNIT: mm PAGE: 1/2

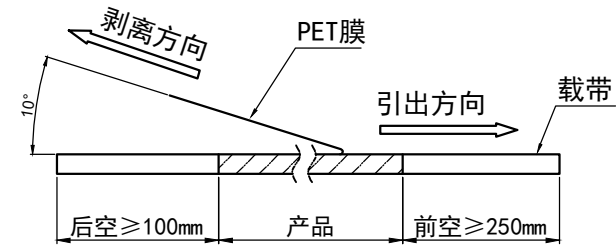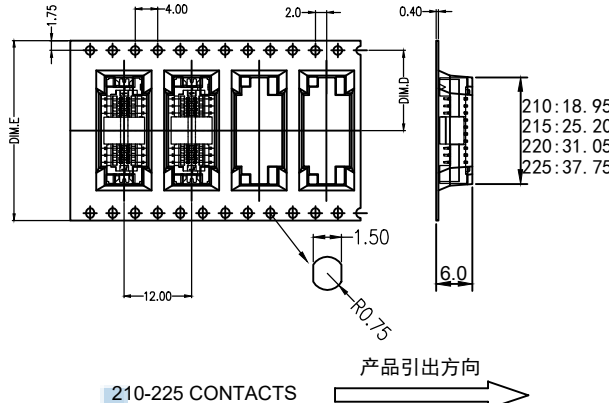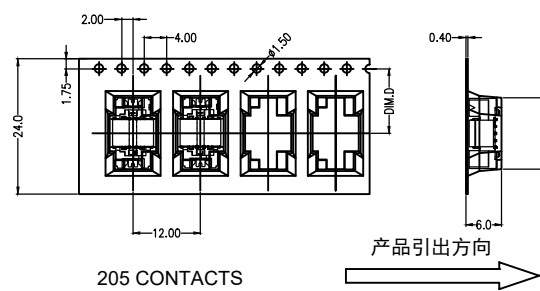

(PET膜剥离示意图)

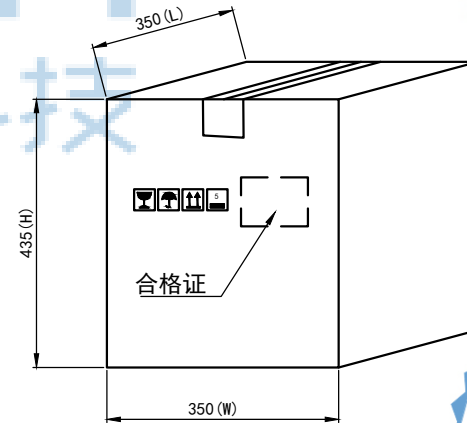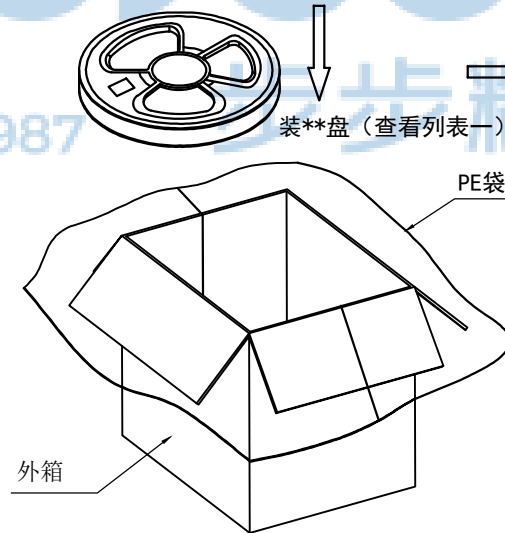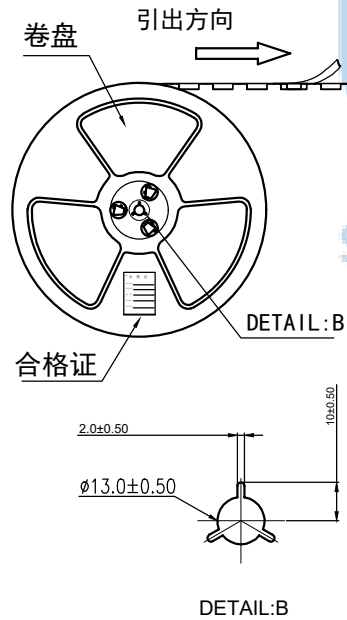

列表一

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Carton)
205 PIN	11.5	24	1000PCS	15/Reel
210 PIN	14.2	32	1000PCS	11/Reel
215-220 PIN	20.2	44	1000PCS	8/Reel
225 PIN	26.2	56	1000PCS	7/Reel

包装说明:

- 把成品包入卷盘中, 每盘装1000PCS, 卷盘上贴上合格证, 将装好产品的卷盘放进外箱中, 外箱内先套一个大PE袋, 外箱上贴贴上合格证.
- 所有材料有害物控制需符合RoHS标准.

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0510-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 .X': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng
CHKD LYX

DR SGF

NAME: 针座 1.25-2x25P 双排 立贴
带柱 米黄色 加盖 编带

PJ NO: 123-254-500001-Y3G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV: A0 UNIT:mm PAGE: 2/2