
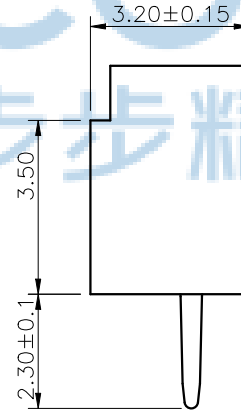
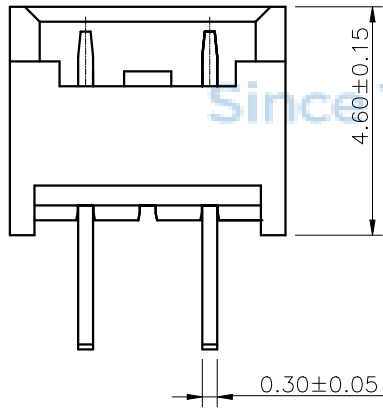
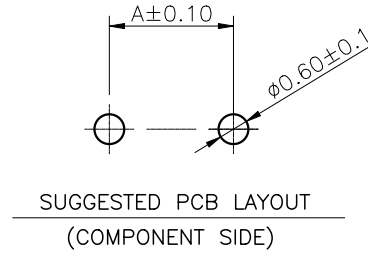


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

技术参数:

- 1、额定电流: 1A, AC, DC;
- 2、额定电压: 125V, AC, DC;
- 3、温度范围: -25℃~+85℃;
- 4、接触电阻: $\leq 0.02\Omega$;
- 5、绝缘电阻: $\geq 100M\Omega$;
- 6、耐压: 500V, AC/minute.
- 7、适用线规: AWG#32 to #28

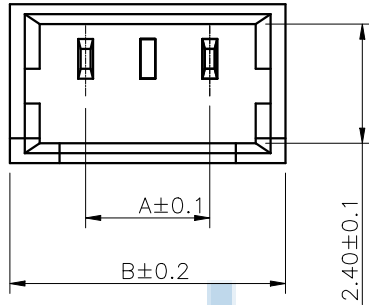

Circuits	Dimensions (mm)	
	A	B
02	1.25	4.30
03	2.50	5.55
04	3.75	6.80
05	5.00	8.05
06	6.25	9.30
07	7.50	10.55
08	8.75	11.80
09	10.00	13.05
10	11.25	14.30
11	12.50	15.55
12	13.75	16.80
13	15.00	18.05
14	16.25	19.30
15	17.50	20.55
16	18.75	21.80

2	端子 Contact	黄铜 Brass	n*1	镀锡
1	基座 Wafer	PA66 (UL94V-0)	1	米色
序号	名称	材料	数量	附注




THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" XX': ±1"		NAME: 针座 1.25-3A2T 中间空1P 直针 米色 袋装			
APPD	JM_Zheng				PJ NO: 123-255-030002-Y3G		
CHKD	LYX				SIZE:A4	DRW NO:	
DR	SGF				FINISH:SEE NOTES		MAT'L:SEE NOTES
					SCALE:N/A	REV:A0	UNIT:mm

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

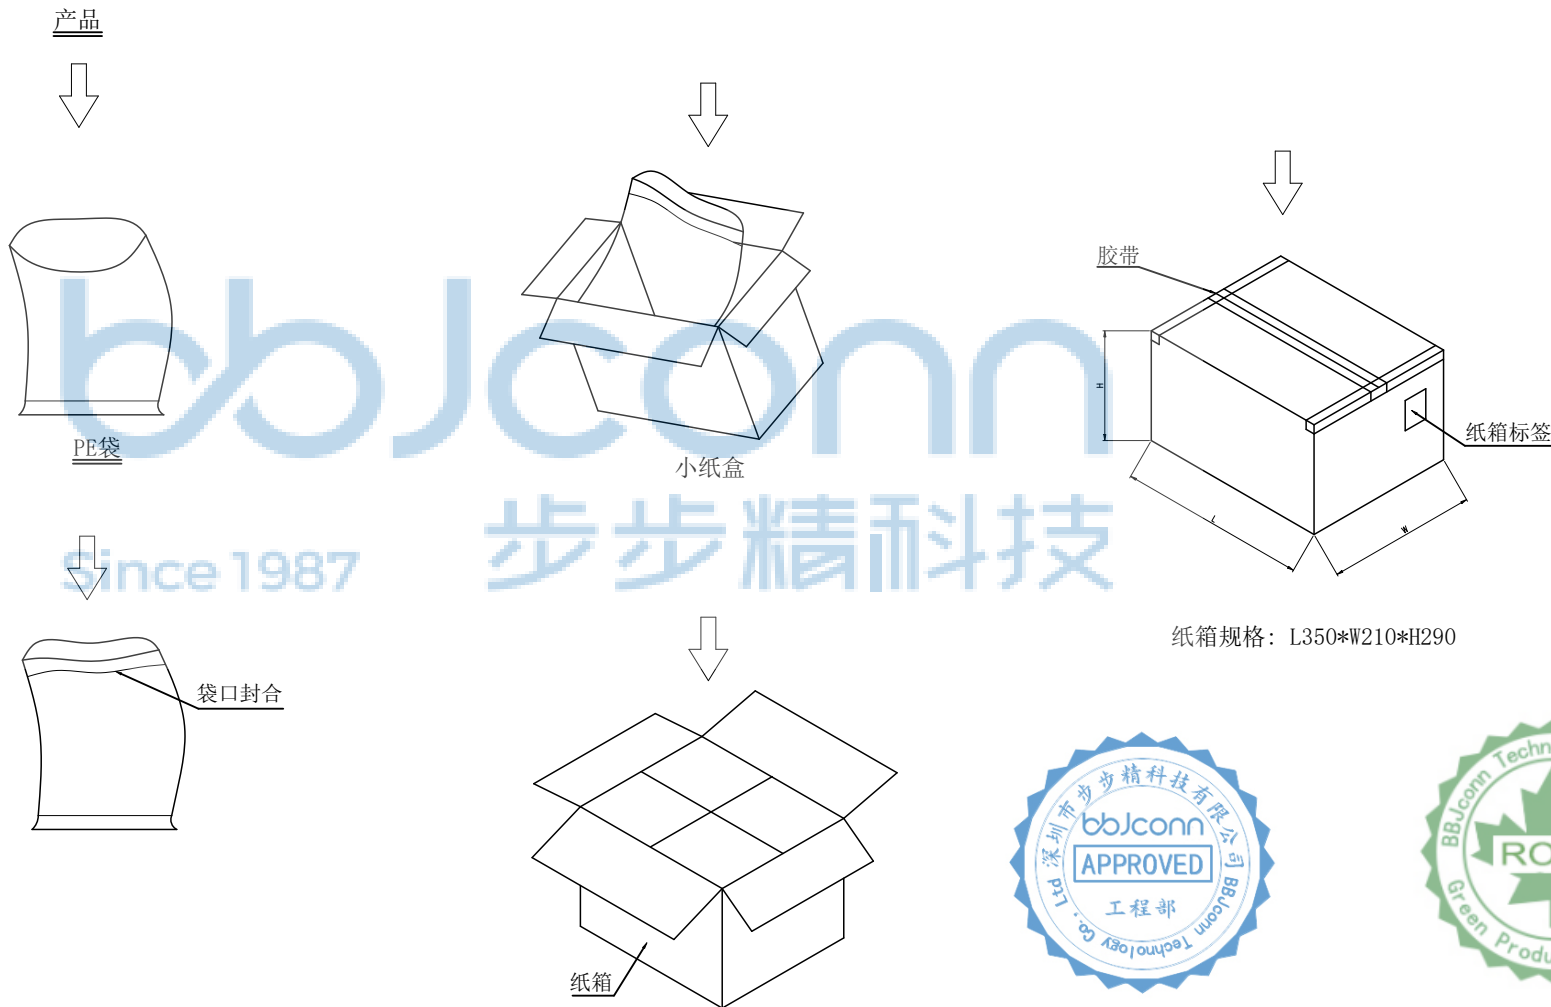

- 1、包装要求:
- 1.1 PE袋包装1000pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计20000pcs ;
 - 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1



深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		NAME: 针座 1.25-3A2T 中间空1P 直针 米色 袋装				
APPD	JM_Zheng				PJ NO: 123-255-030002-Y3G			
CHKD	LYX				SIZE:A4	DRW NO:		
DR	SGF				FINISH:SEE NOTES		MAT'L:SEE NOTES	
					SCALE:N/A	REV: A0	UNIT:mm	PAGE: 2/2