

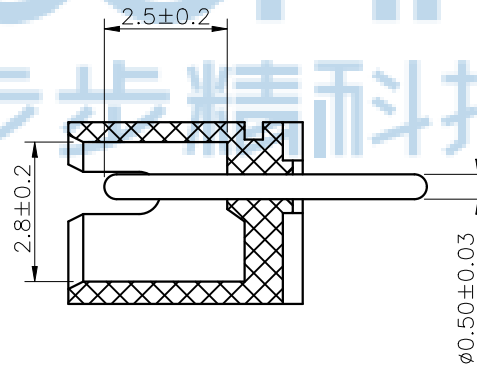
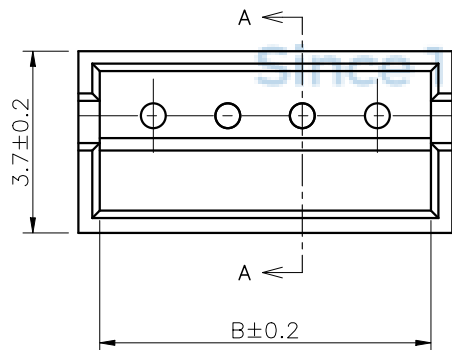
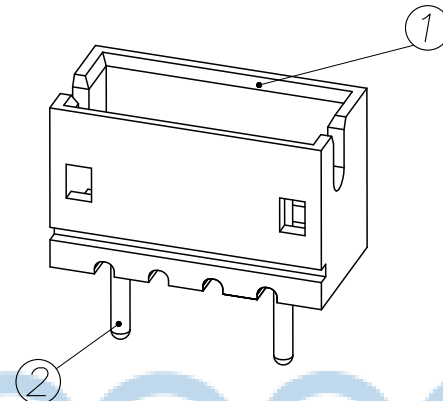


REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

- 技术参数:
- 1、额定电流: 1A, AC, DC;
 - 2、额定电压: 50V, AC, DC;
 - 3、温度范围: -25℃~+85℃;
 - 4、接触电阻: $\leq 0.02\Omega$;
 - 5、绝缘电阻: $\geq 500M\Omega$;
 - 6、耐压: 500V, AC/minute.
 - 7、适用线规: AWG#32 to #26

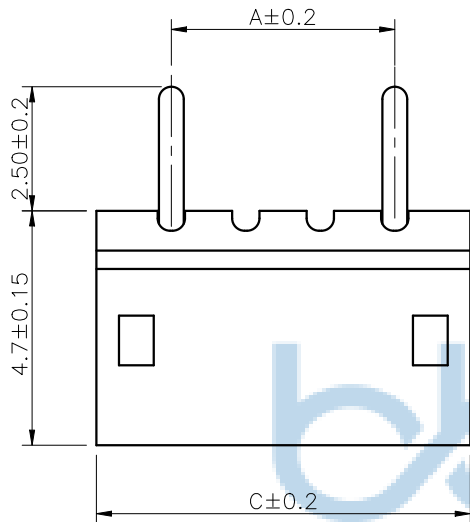

SECTION A-A

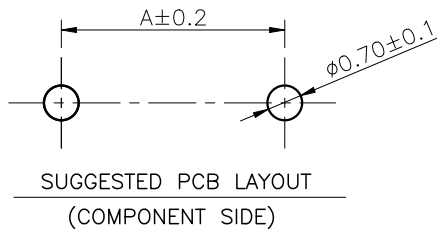

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)



Circuits	Dimensions (mm)		
	A	B	C
02	1.50	3.60	4.50
03	3.00	5.10	6.00
04	4.50	6.60	7.50
05	6.00	8.10	9.00
06	7.50	9.60	10.50
07	9.00	11.10	12.00
08	10.50	12.60	13.50
09	12.00	14.10	15.00
10	13.50	15.60	16.50
11	15.00	17.10	18.00
12	16.50	18.60	19.50
13	18.00	20.10	21.00
14	19.50	21.60	22.50
15	21.00	23.10	24.00
16	22.50	24.60	25.50

2	端子 Contact	黄铜 Brass	n*1	镀锡
1	基座 Wafer	PA66 (UL94V-0)	1	米色
序号	名称	材料	数量	附注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1



深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13 X': $\pm 3^\circ$ X': $\pm 2^\circ$.XX': $\pm 1^\circ$

APPD JM_Zheng

CHKD LYX

DR

SGF

NAME:
针座 ZH1.5-4A2T 中间空2P 直针 米色 袋装


PJ NO: 123-265-040001-Y3G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

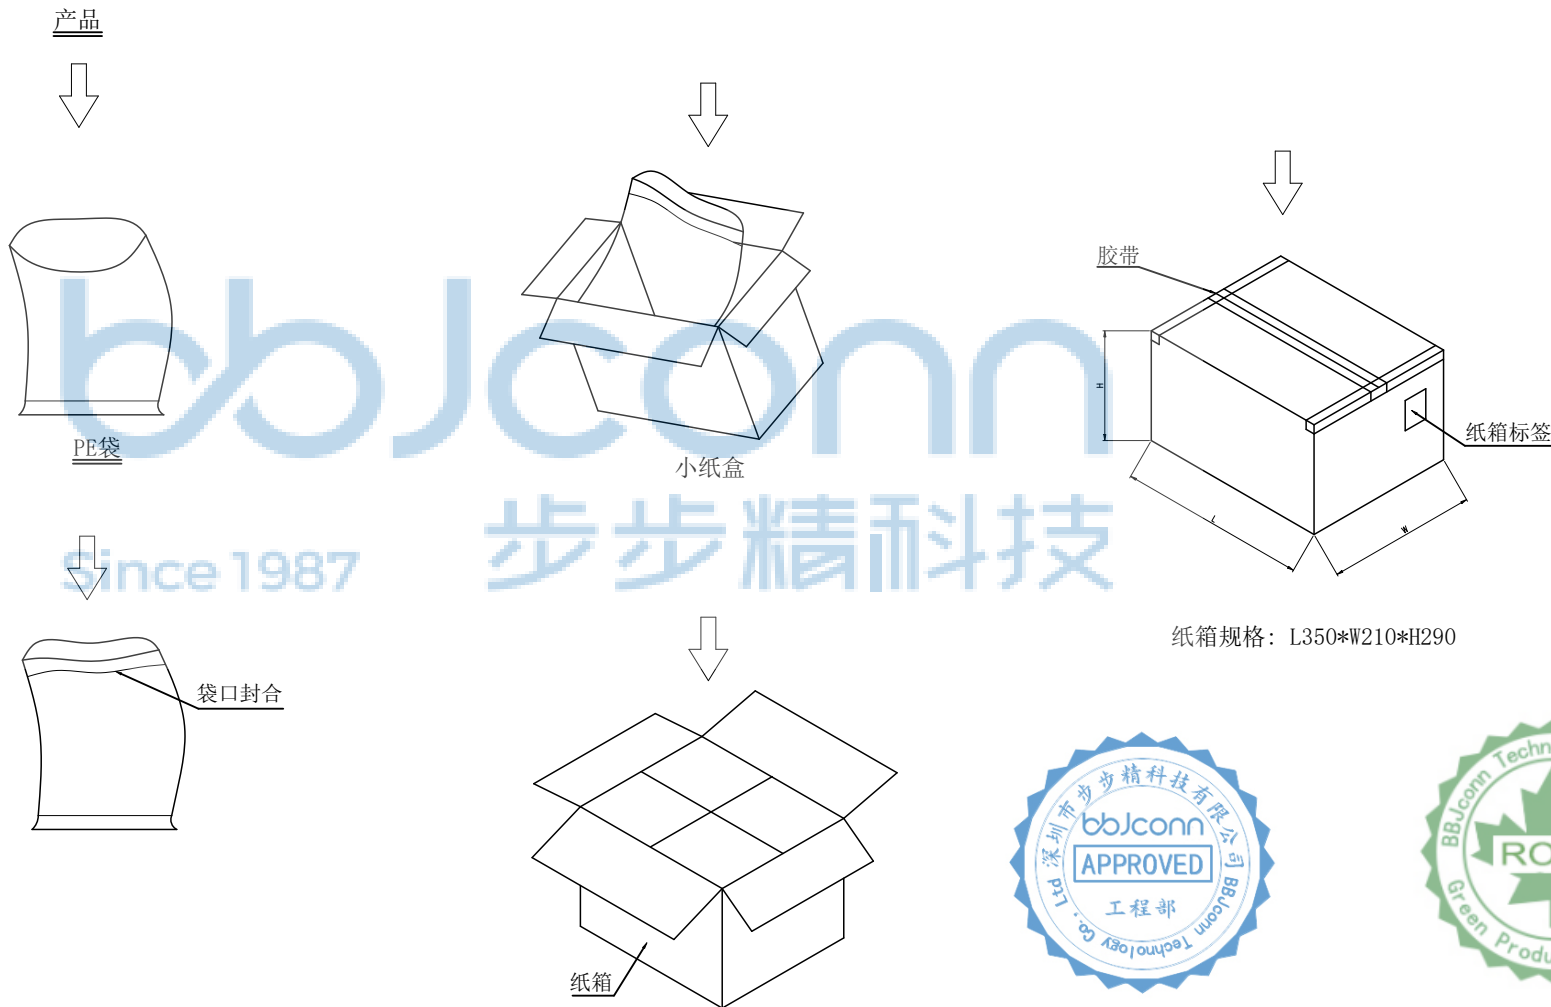

- 1、包装要求:
- 1.1 PE袋包装1000pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计20000pcs ;
 - 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0510-1		深圳市步步精科技有限公司			
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"	NAME: 针座 ZH1.5-4A2T 中间空2P 直针 米色 袋装	
		APPD	JM_Zheng	针座 ZH1.5-4A2T 中间空2P 直针 米色 袋装	PJ NO: 123-265-040001-Y3G
		CHKD	LYX	针座 ZH1.5-4A2T 中间空2P 直针 米色 袋装	SIZE:A4 DRW NO:
DR		SGF	FINISH:SEE NOTES		MAT'L:SEE NOTES
			SCALE:N/A		REV: A0
			UNIT:mm		PAGE: 2/2