
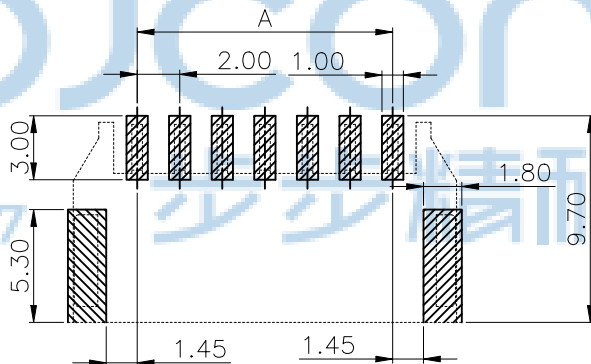
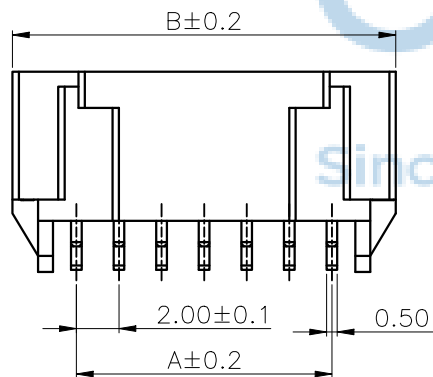
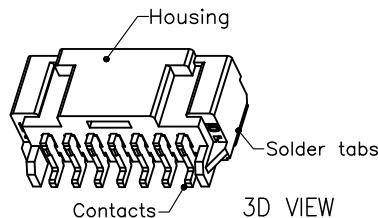




REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

Specifications:

Contact resistance: $\leq 25\text{m}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
Rated voltage: 125V AC DC
Rated current: 3.0A AC DC
Withstand voltage: 1000V AC/minute
Temperature range: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$
Housing: PA9T, UL94V-0, Natural
Contacts: PhosphorBronze/Matte Sn
Solder tabs: PhosphorBronze/Matte Sn

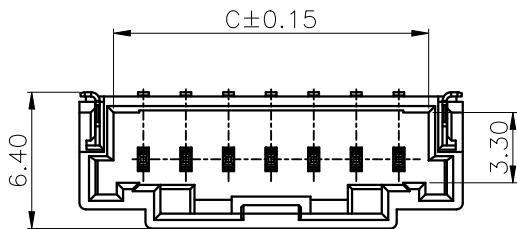

SUGGESTED PCB LAYOUT

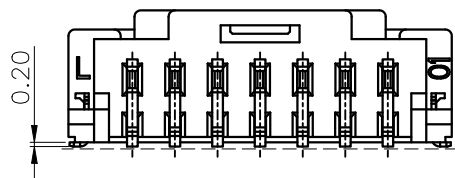

0.1 MAX



PIN.	DIM A	DIM B	DIM C
2pin	2.00	8.00	4.80
3pin	4.00	10.00	6.80
4pin	6.00	12.00	8.80
5pin	8.00	14.00	10.80
6pin	10.00	16.00	12.80
7pin	12.00	18.00	14.80
8pin	14.00	20.00	16.80
9pin	16.00	22.00	18.80
10pin	18.00	24.00	20.80
11pin	20.00	26.00	22.80
12pin	22.00	28.00	24.80
13pin	24.00	30.00	26.80
14pin	26.00	32.00	28.80
15pin	28.00	34.00	30.80



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 X'': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR



NAME:
针座 A2009-14AB (2.0-14P) 卧贴 米黄色 编带

PJ NO: 123-271-140003-Y3G


SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES


SCALE:N/A REV:A0 UNIT:mm PAGE:1/3

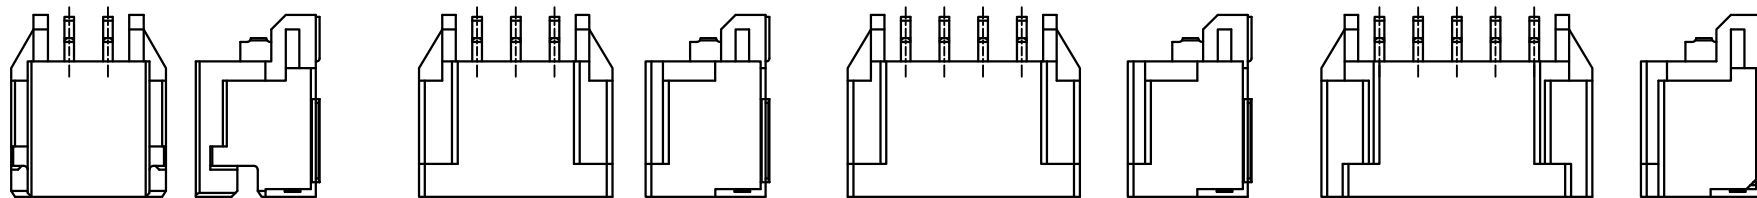


2P




3P





4P




5P




6P

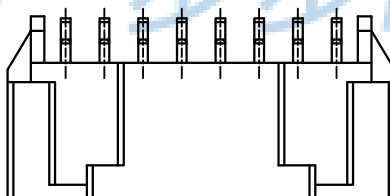

7-15P




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0510-1		深圳市步步精科技有限公司		NAME: 针座 A2009-14AB (2.0-14P) 卧贴 米黄色 编带	
				PJ NO: 123-271-140003-Y3G	
APPD	JM_Zheng	SIZE:A4		DRW NO:	
CHKD	LYX	FINISH:SEE NOTES		MAT'L:SEE NOTES	
DR	SGF	SCALE:N/A		REV:A0	UNIT:mm
				PAGE:2/3	

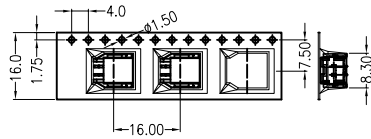



02 CONTACTS

产品引出方向


06-15 CONTACTS

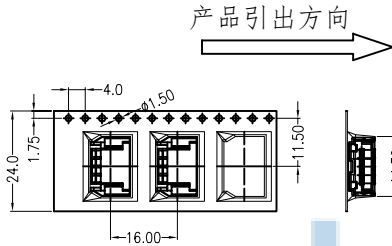


03-05 CONTACTS

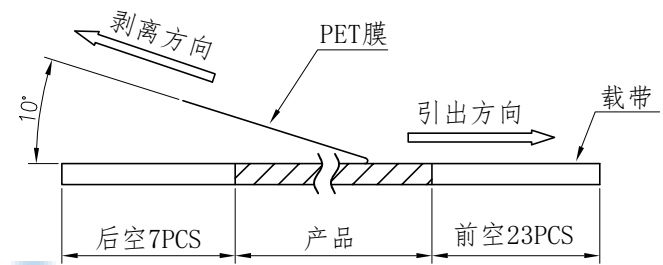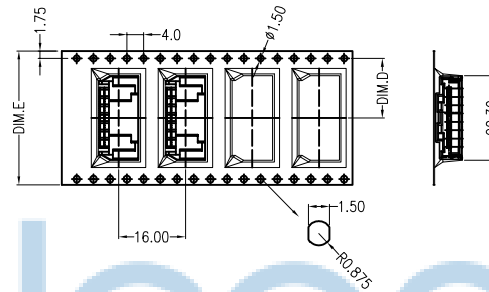

(PET膜剥离示意图)


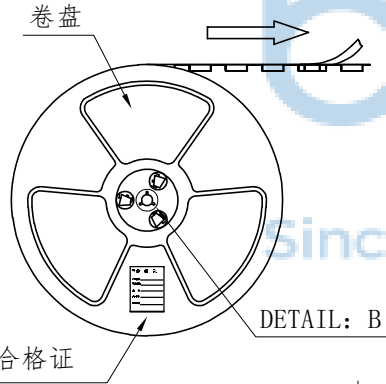


DETAIL: B



真空袋

装**盘见(列表一)

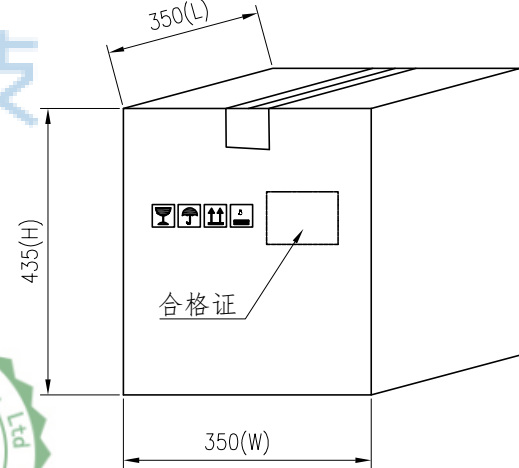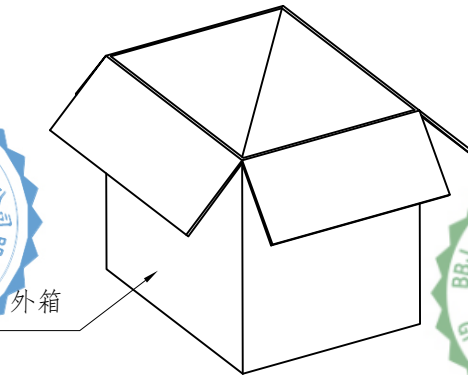

列表一:

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Caton)
02 PIN	7.50	16	600PCS	20/Reel
03~05PIN	11.50	24	600PCS	15/Reel
06~08PIN	14.25	32	600PCS	11/Reel
09~13PIN	20.20	44	600PCS	8/Reel
14~15PIN	26.20	56	600PCS	7/Reel

包装说明:

- 把成品包入卷盘中, 每盘装600PCS, 卷盘上贴上合格证, 将装好产品的卷盘含真空袋直接放进外箱中, 外箱上贴贴上合格证.
- 所有材料有害物控制符合RoHS标准.

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0510-1



深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

APPD JM_Zheng

CHKD LYX

DR SGF

NAME:

针座 A2009-14AB (2.0-14P) 卧贴 米黄色 编带

PJ NO: 123-271-140003-Y3G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV: A0 UNIT:mm PAGE: 3/3