

REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

- 技术参数:
- 1、额定电流: 1A, AC, DC;
 - 2、额定电压: 50V, AC, DC;
 - 3、温度范围: -25℃~+85℃;
 - 4、接触电阻: $\leq 0.02\Omega$;
 - 5、绝缘电阻: $\geq 500M\Omega$;
 - 6、耐压: 500V, AC/minute.
 - 7、适用线规: AWG#32 to #26



Circuits	Dimensions (mm)		
	A	B	C
02	1.50	3.60	4.50
03	3.00	5.10	6.00
04	4.50	6.60	7.50
05	6.00	8.10	9.00
06	7.50	9.60	10.50
07	9.00	11.10	12.00
08	10.50	12.60	13.50
09	12.00	14.10	15.00
10	13.50	15.60	16.50
11	15.00	17.10	18.00
12	16.50	18.60	19.50
13	18.00	20.10	21.00
14	19.50	21.60	22.50
15	21.00	23.10	24.00
16	22.50	24.60	25.50

2	端子 Contact	黄铜 Brass	n*1	镀锡
1	基座 Wafer	PA66 (UL94V-0)	1	米色
序号	名称	材料	数量	附注




THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

 深圳市步步精科技有限公司				
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X'': ±2' X'X': ±1'		
		NAME: 针座 ZH1.5-7A6T 空第3P 直针 米色 袋装		
APPD	JM_Zheng		PJ NO: 123-265-070002-Y3G	
CHKD	LYX		SIZE:A4	DRW NO:
DR	SGF	FINISH:SEE NOTES		MAT'L:SEE NOTES
		SCALE:N/A	REV:A0	UNIT:mm



PDWG NO: 0510-1

DR

SGF

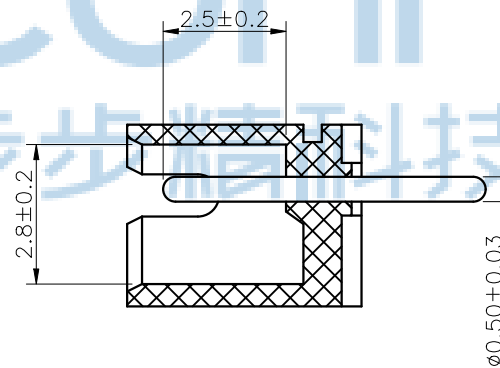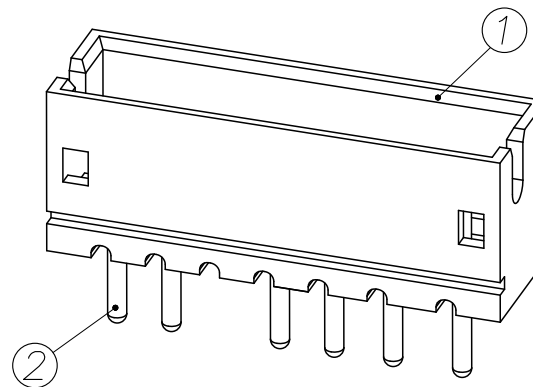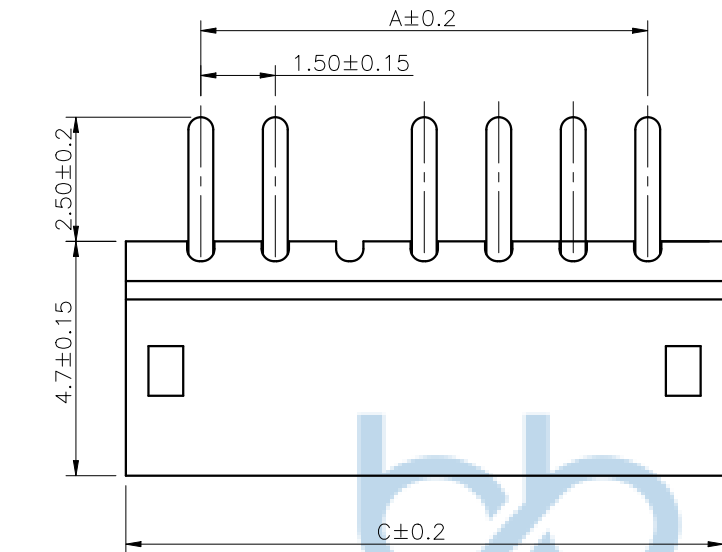


SECTION A-A

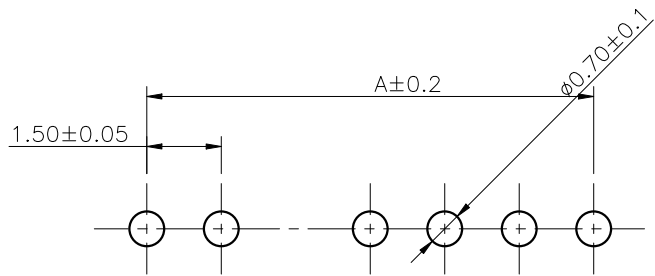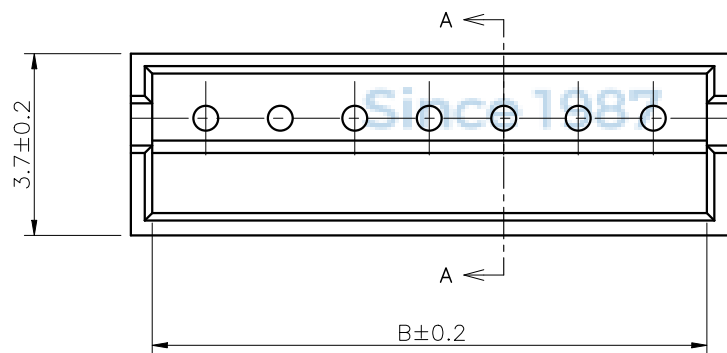

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

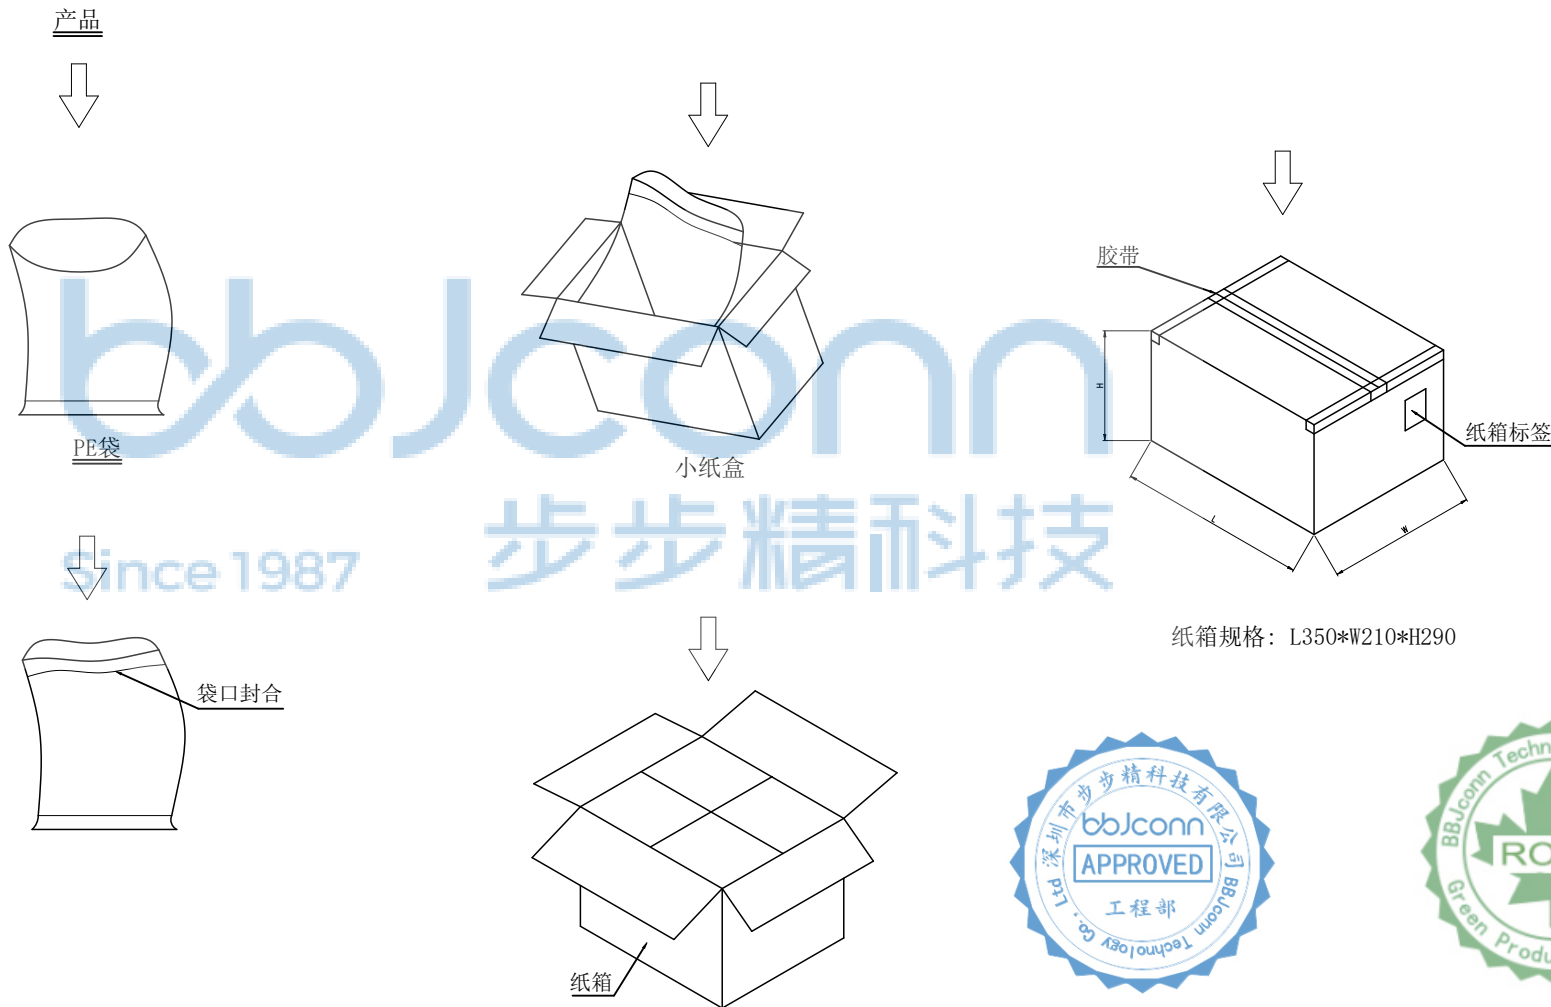

- 1、包装要求:
- 1.1 PE袋包装1000pcs;
 - 1.2 每1袋放一小纸盒;
 - 1.3 每20个小纸盒放一个纸箱, 共计20000pcs ;
 - 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
		NAME: 针座 ZH1.5-7A6T 空第3P 直针 米色 袋装	
APPD	JM_Zheng	SIZE:A4	DRW NO:
CHKD	LYX	FINISH:SEE NOTES	MAT'L:SEE NOTES
PDWG NO: 0510-1	DR	SCALE:N/A	REV: A0 UNIT:mm PAGE: 2/2