

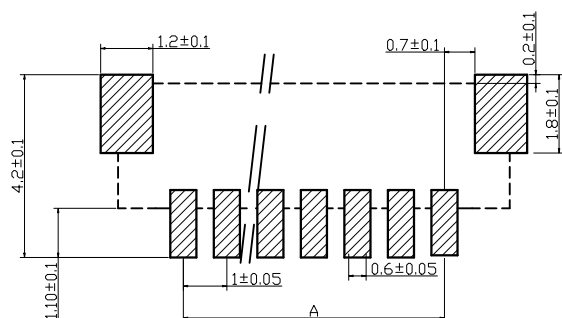
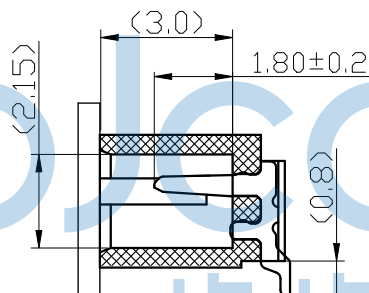
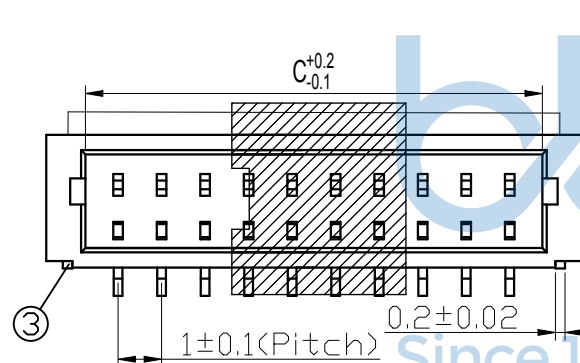
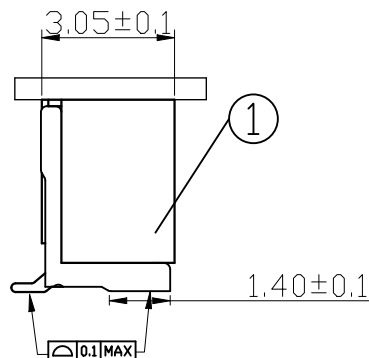


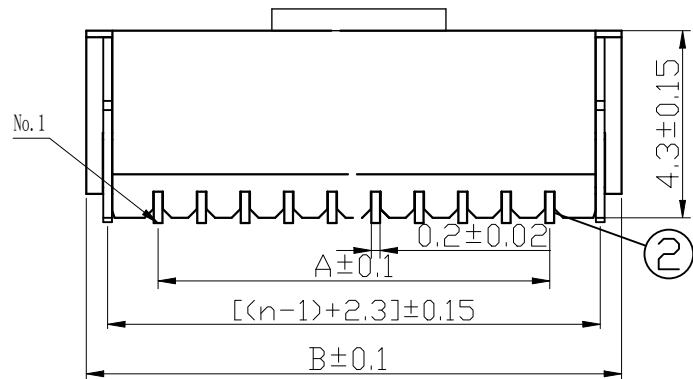

1.0LT-nP PCB寸法
PCB Layout

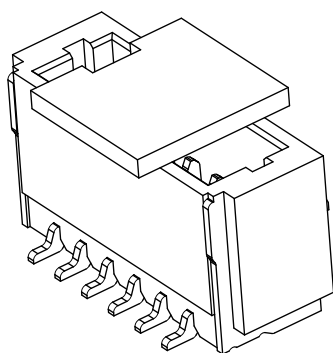

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$;
- 3、额定电压: 150V, AC, DC(等效);
- 4、接触电阻: $\leq 0.02\Omega$;
- 5、绝缘电阻: $\geq 100\text{M}\Omega$;
- 6、耐压: 500V, AC/minute.

孔位 poles	A	B	C
2	1	4.3	2.4
3	2	5.3	3.4
4	3	6.3	4.4
5	4	7.3	5.4
6	5	8.3	6.4
7	6	9.3	7.4
8	7	10.3	8.4
9	8	11.3	9.4
10	9	12.3	10.4
11	10	13.3	11.4
12	11	14.3	12.4
13	12	15.3	13.4
14	13	16.3	14.4
15	14	17.3	15.4
16	15	18.3	16.4
17	16	19.3	17.4
18	17	20.3	18.4
19	18	21.3	19.4
20	19	22.3	20.4


3	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡 80u"MIN.
2	端子 Contact	磷青铜 Phosphor Bronze	n*1	电镀(锡): 整个表面镀底镍30u"MIN, 再镀锡 80u"MIN.
	基座 Wafer	LCP(U94V-0)	1	本色
序号	名称	材料	数量	附注

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0510-1


深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X*: $\pm 3^{\circ}$.X*: $\pm 2^{\circ}$.XX*: $\pm 1^{\circ}$
NAME: 针座 1.0-8P 立贴 加盖 米黄色	
APPD. JM_Zheng	PJ. NO.: WT.10.61-83-M002
CHKD. LYX	SIZE: A4 DRW NO.:
DR. TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2







REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

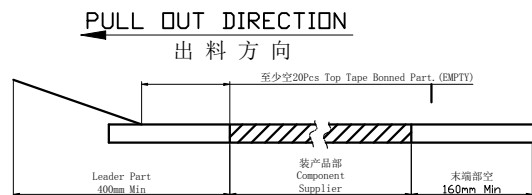


载带带头及带尾尺寸
Lead tape length



载带上下带剥离强度: 0.1N--1.3N(10g~130g)
Peeling off force of top tape:
0.1N--1.3N(10g~130g)

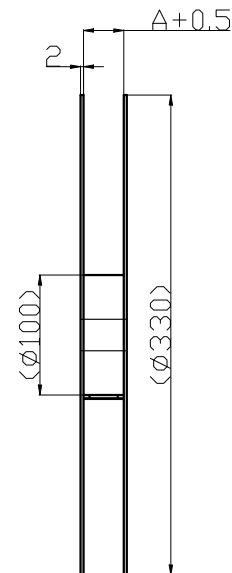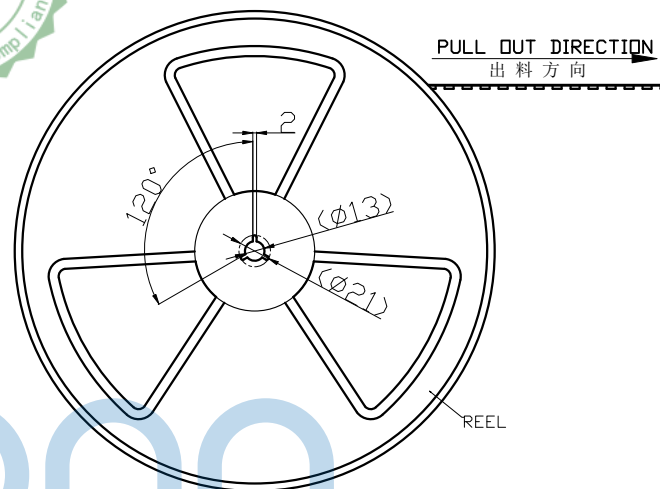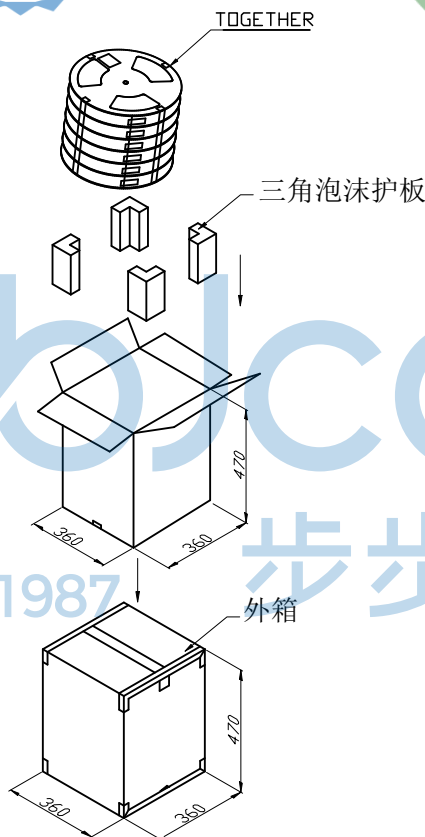

宽度: 16mm/24mm 载带

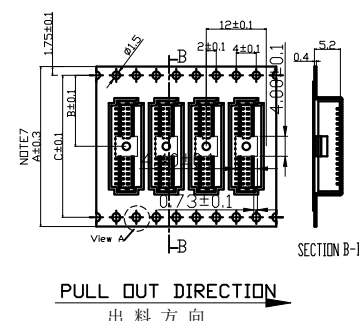

Note:

- 1.Sprocket holes pitch cumulative tolerance ± 0.1 (Accumulative Pitch ± 0.2)
- 2.Carrier camber is within 1mm in 100mm.
- 3.All dimensions meet EIA-481-D requirements.
- 4.Thick ness: 0.4 ± 0.1 mm.
- 5.Material of top fape: PET, PE, PEF
- 6.Material of carrier fape: Poystyrene
- 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

芯数 Pin (n)	尺寸 A	尺寸 B	尺寸 C
2-6	16.0	7.5	---
7-14	24.0	11.5	---
15-16	32.0	14.2	28.4

1. 0WT-nP				
REEL WIDTH	16	24	32	44
PCS/REEL	1500			
CTN. SIZE	360*360*470			

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG, NO: 0510-1
DR. TSP

深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$ X'': $\pm 2'$ X'X': $\pm 1'$		NAME: 针座 1.0-8P 立贴 加盖 米黄色	
APPD. JM_Zheng		CHKD. LYX		PJ. NO.: WT.10.61-83-M002	
DR. TSP		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A0		UNIT: mm	
PAGE: 2/2					