
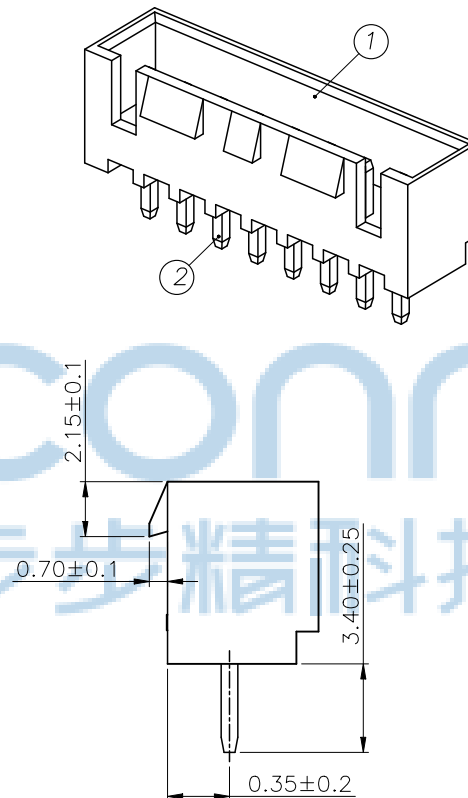


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

技术参数:



- 1、所有材料符合ROHS2.0/REACH要求。
- 2、额定电流: 3A, AC, DC;
- 3、额定电压: 250V, AC, DC;
- 4、温度范围: -25℃~+85℃;
- 5、接触电阻: $\leq 0.02\Omega$;
- 6、绝缘电阻: $\geq 1000M\Omega$;
- 7、耐压: 1000V, AC/minute.

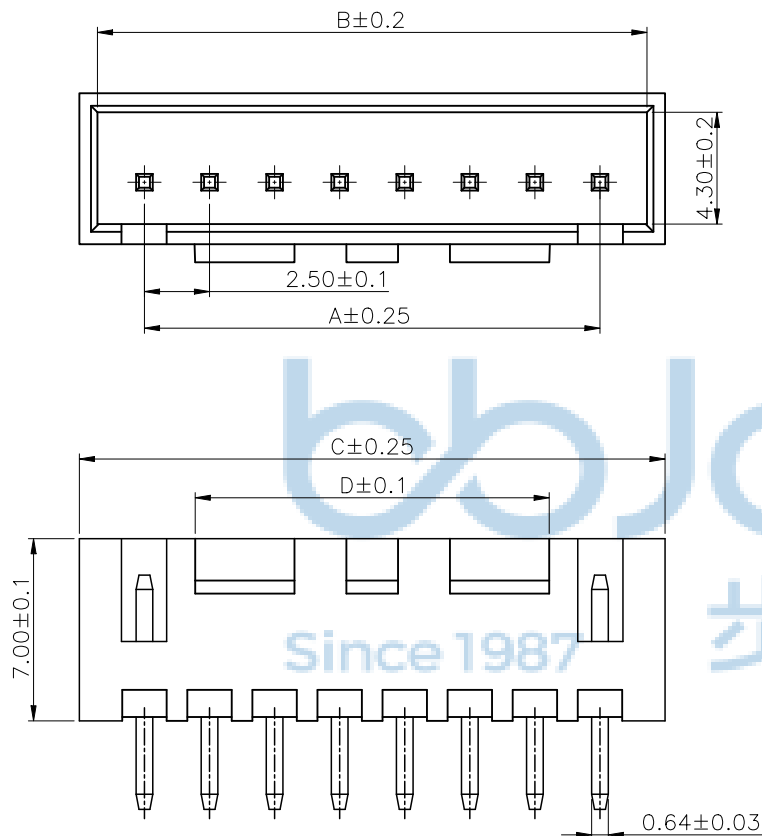

Circuits	Dimensions (mm)			
	A	B	C	D
02	2.50	6.10	7.50	3.10
03	5.00	8.60	10.00	3.10
04	7.50	11.10	12.50	3.60
05	10.00	13.60	15.00	6.10
06	12.50	16.10	17.50	8.60
07	15.00	18.60	20.00	11.10
08	17.50	21.10	22.50	13.60
09	20.00	23.60	25.00	16.10
10	22.50	26.10	27.50	18.60
11	25.00	28.60	30.00	21.10
12	27.50	31.10	32.50	23.60
13	30.00	33.60	35.00	26.10
14	32.50	36.10	37.50	28.60
15	35.00	38.60	40.00	31.10
16	37.50	41.10	42.50	33.60




SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

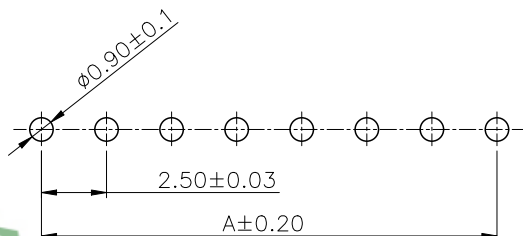


2	端子 Contact	黄铜	n*1	电镀 (锡): 整个表面镀底镍30u"MIN, 再镀锡 80u"MIN
1	基座 Wafer	PA66 (UL94V-0)	1	白色
序号	名称	材料	数量	附注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION. PDWG NO: 0510-1		深圳市步步精科技有限公司	
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$ X': $\pm 2'$ XX': $\pm 1'$
APPD	JM_Zheng	NAME: 针座 XHB 2.5-2P 直针 带扣 白色 袋装	
CHKD	LYX	PJ NO: SIZE:A4 DRW NO:	
DR	SGF	FINISH:SEE NOTES MAT'L:SEE NOTES SCALE:N/A REV:A0 UNIT:mm PAGE:1/2	

产品




PE袋

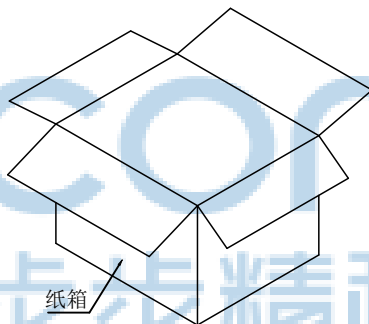

纸箱




胶带

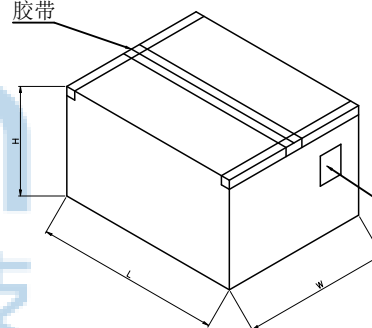

纸箱标签

纸箱规格: L470*W440*H430



袋口封合



1、包装要求:

- 1.1 PE袋包装2000pcs;
- 1.2 每72袋放一个纸箱, 共计144000pcs;
- 1.3 纸箱外贴上标签

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0510-1



深圳市步步精科技有限公司

.X: ±0.38 X*: ±3"
.XX: ±0.25 .X*: ±2"
.XXX: ±0.13 .XX*: ±1"

APPD JM_Zheng

CHKD LYX

DR

SGF

NAME: 针座 XHB 2.5-2P 直针 带扣 白色 袋装

PJ NO:

SIZE:A4 DRW NO:

FINISH:SEE NOTES

SCALE:N/A

MAT'L:SEE NOTES

REV:A0 UNIT:mm PAGE:2/2