

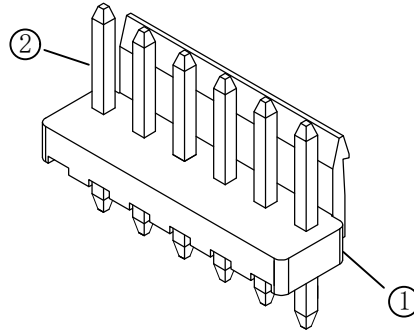


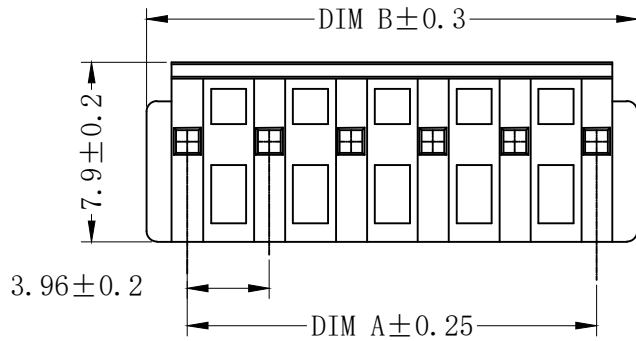

技术要求:

- 1、塑件材料: PA66 (UL-94V-0)
- 2、接触件: 黄铜镀锡
- 3、接触电阻: $\leq 20\text{m}\Omega$
- 4、绝缘电阻: $\geq 1000\text{M}\Omega$
- 5、额定电压: 250V AC DC
- 6、额定电流: 7.0A AC DC
- 7、耐压: 能承受1000V AC/Minute
- 8、工作温度: $-25^{\circ}\sim +85^{\circ}$
- 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 235^{+5}_{-0} , 时间 2.5 ± 0.5 秒
- 10、铅和镉等六大有害物质含量要符合环保要求

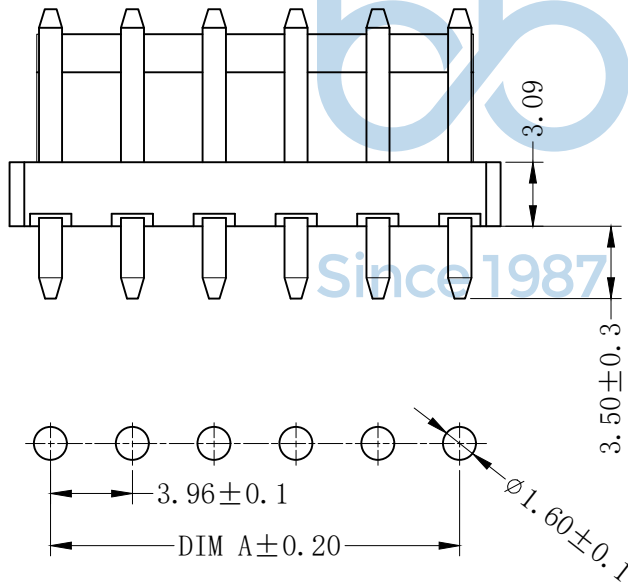

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)


序号	名称	材料	数量	附注
2	端子 Contact	黄铜	n×1	电镀(锡): 金手指面镀层30u"MIN, 厚镀层 80u"MIN..
1	基座 Wafer	PA66 (UL94V-0)	1	米黄色/白色

Circuits	Dimensions (mm)	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
...	...	...
20	75.24	79.20


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0510-1		DR. TSP	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3^{\circ}$ X'': $\pm 2^{\circ}$ X'': $\pm 1^{\circ}$		NAME: 针座 VH-3A(3.96-3P) 直针 米黄色 过灼热丝850度	
APPD. JM_Zheng		CHKD. LYX		PJ. NO.:	
FINISH: SEE NOTES		MAT'L.: SEE NOTES		SCALE: N/A	
REV.: A0		UNIT: mm		PAGE: 1/2	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格: 260*185

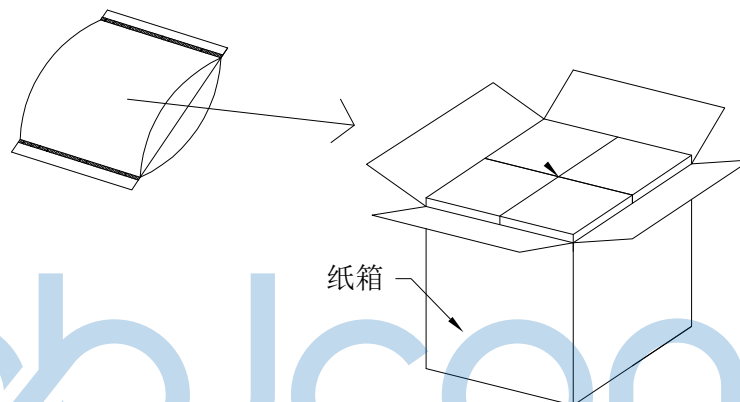

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PJ. NO.:	针座 VH-3A(3.96-3P) 直针 米黄色 过灼热丝850度	NAME:	
SIZE: A4	DRW NO.:	APPD.	JM_Zheng
FINISH: SEE NOTES	MAT'L.: SEE NOTES	CHKD.	LYX
SCALE: N/A	REV.: A0	DR.	TSP
UNIT: mm	PAGE: 2/2		