
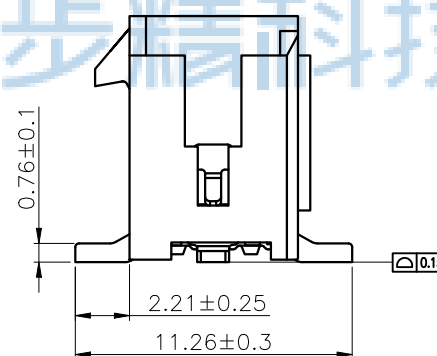
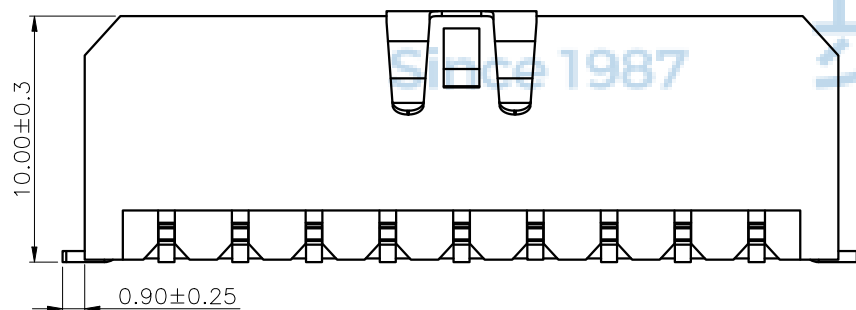
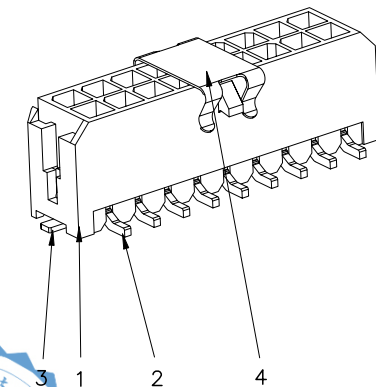
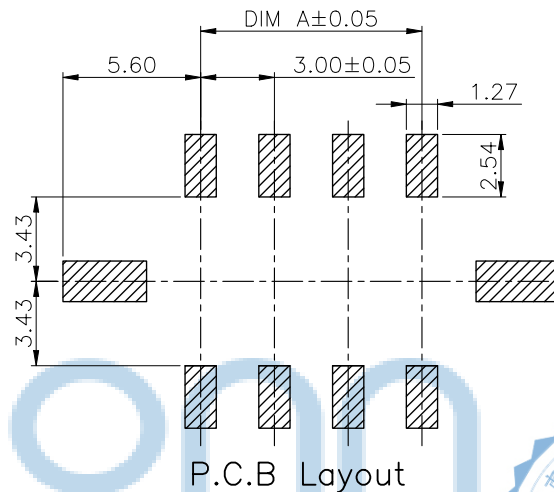


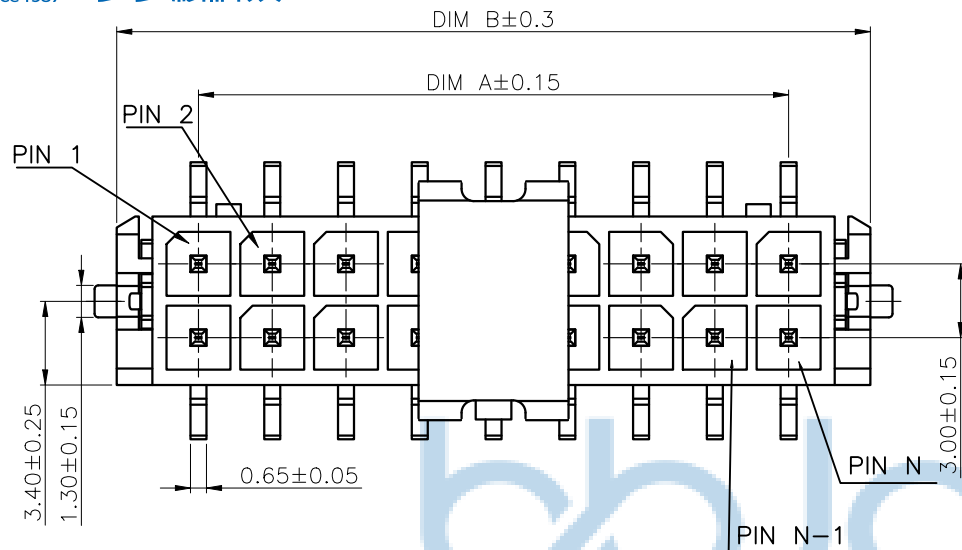


技术参数:

- 1、额定电流: 5.0A AC DC.
- 2、接触电阻: 20mΩ Max.
- 3、耐电压: 1000V AC/minute.
- 4、绝缘电阻: 1000MΩ Min.
- 5、额定电压: 250V AC DC
- 6、使用温度: -25~+85℃.

CKT	DIM A	DIM B
2x1	/	6.65
2x2	3.00	9.65
2x3	6.00	12.65
2x4	9.00	15.65
2x5	12.00	18.65
2x6	15.00	21.65
2x7	18.00	24.65
2x8	21.00	27.65
2x9	24.00	30.65
2x10	27.00	33.65
2x11	30.00	36.65
2x12	33.00	39.65

序号	产品名称	材料规格	表面处理/颜色	数量
1	胶芯	LCP UL94V-0	黑色	1
2	端子	铜合金	镀锡	N
3	焊片	铜合金	镀锡	2
4	吸取盖	不锈钢	—	1

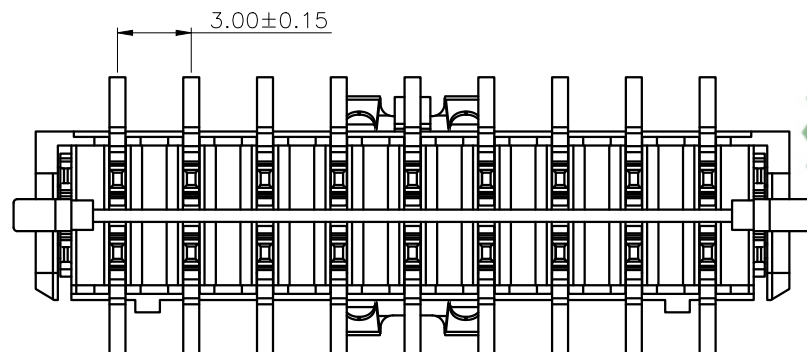

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1

深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .XX': ±1"

APPD JM_Zheng

CHKD LYX

DR SGF



NAME:
针座 3.0-2x4P 立贴 带扣 黑色 加盖编带

PJ NO: 123-2B1-080002-X3G


SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:1/2

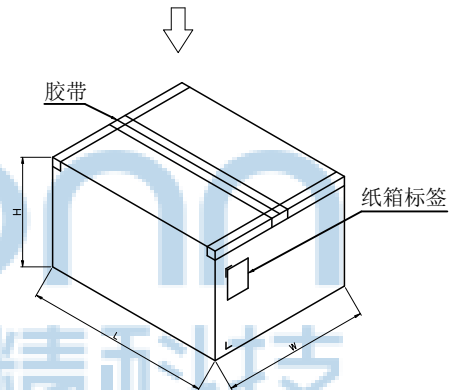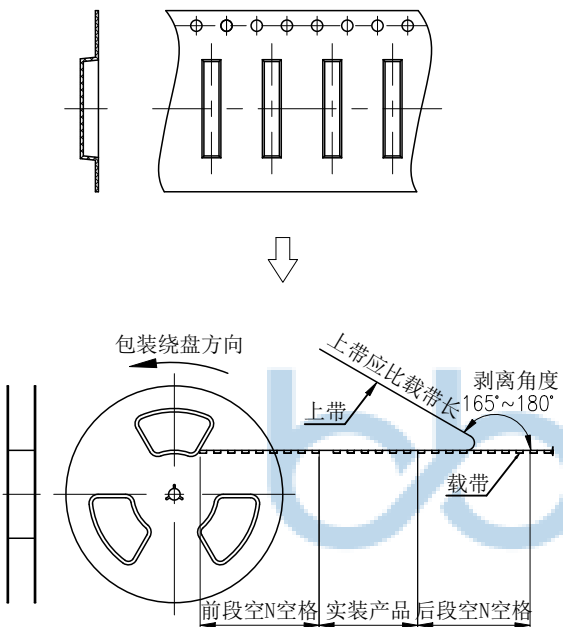

纸箱规格: W345*L345*H230MM

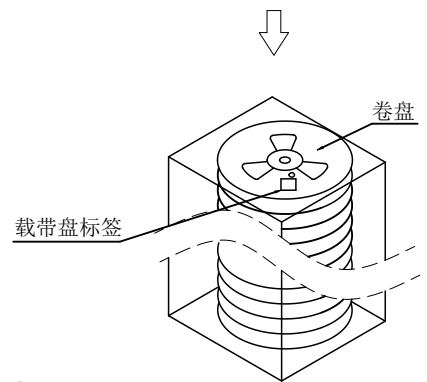

备注:
1、包装数量: 250/PCS/卷, 5卷/箱。
2、包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: 针座 3.0-2x4P 立贴 带扣 黑色 加盖编带	
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$	PJ NO: 123-2B1-080002-X3G	SIZE:A4 DRW NO:
APPD	JM_Zheng	FINISH:SEE NOTES		MAT'L:SEE NOTES	
CHKD	LYX	SCALE:N/A		REV:A0	
PDWG NO: 0456-1	DR	SGF	UNIT:mm		PAGE:2/2