
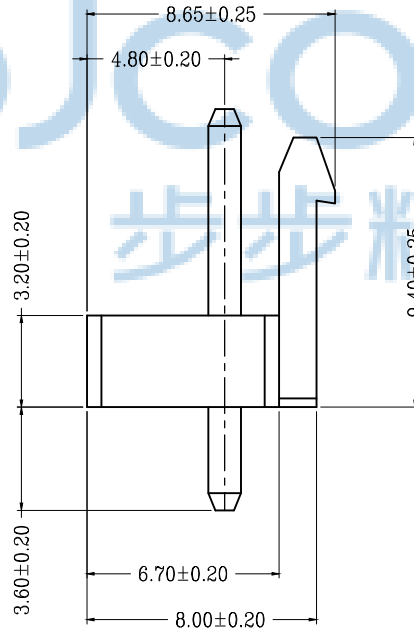
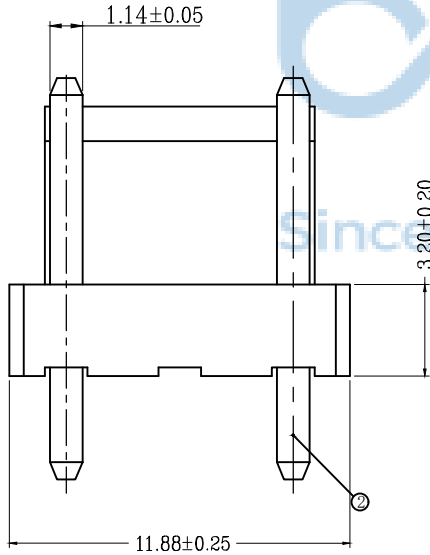
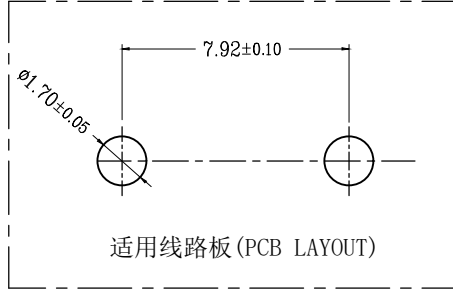
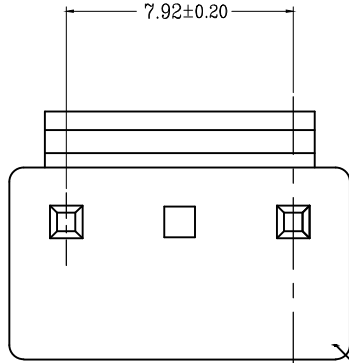


REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

技术指标 (Technical Index):

1. 温度范围 (Temperature range): $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
2. 额定电压 (Rated voltage): 250V, AC, DC.
3. 额定电流 (Rated current): 7.0A AC, DC.
4. 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$.
5. 耐压值 (Withstanding voltage): 1500V AC/minute.
6. 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$.



序号	品名	材质
①	胶芯	PA66 UL94V-0 米黄色
②	端子	铜合金/表面镀锡

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.



PDWG NO: 0456-1

 深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3' .X*: ±2' .XX*: ±1'		NAME: 针座 VH3.96-3P 直针 中间空1P 米黄色 袋装			
APPD	JM_Zheng				PJ NO: 123-2J5-030001-X3G		
CHKD	LYX				SIZE:A4	DRW NO:	
DR	SGF			FINISH:SEE NOTES		MAT'L:SEE NOTES	
				SCALE:N/A	REV: A0	UNIT:mm	PAGE: 1/2



NOTE(注):

- 1.纸箱装箱以不超过装箱线为准,空余位置用塑料泡沫及保尼龙填充;
- 2.纸箱分小、中、标准型、大4种规格型号:装箱为整箱(左下包装量)采用大型纸箱包装,未达到整箱数量以产品量适当采用小型、中型或标准型纸箱包装;



PE袋 1 Pcs

数量 :每袋=0.3~2Kpcs

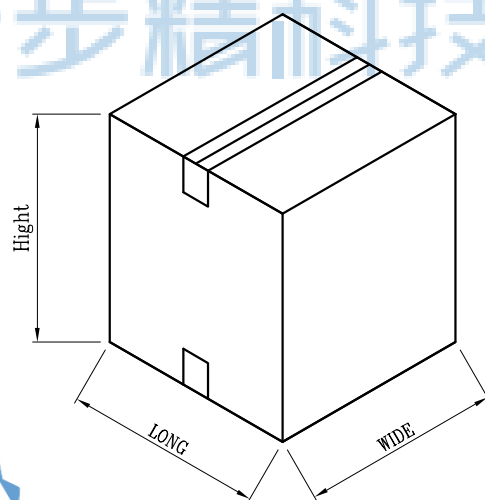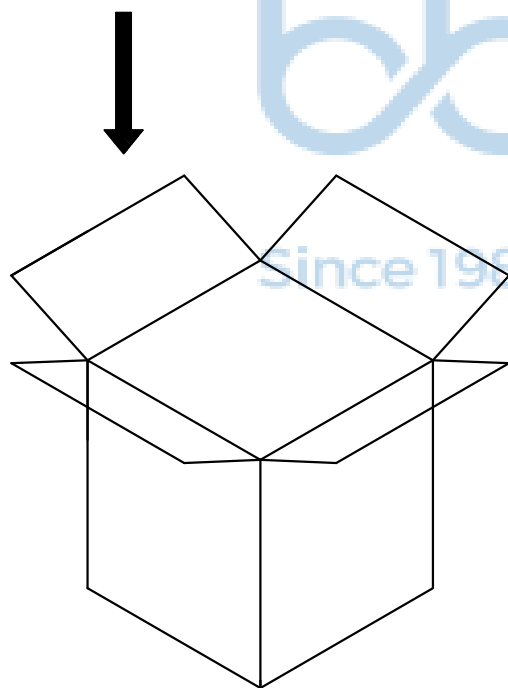

袋装包装数量

CKT	PCS/BAG
2	2000
3	1000
4	1000
5	500
6	500
7	500
8	500
9	300
10	300
11	300
12	300
13	300
14	300
15	300
16	300

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard	大型 Large
长度 Long (CM)	35	35	35	46
宽度 Wide (CM)	35	35	35	46
高度 Hight (CM)	7.5	15	32	46



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1



深圳市步步精科技有限公司

.X: ± 0.38 X*: $\pm 3'$
.XX: ± 0.25 .X*: $\pm 2'$
.XXX: ± 0.13 .XX*: $\pm 1'$

APPD JM_Zheng

CHKD LYX

DR SGF

NAME:

针座 VH3.96-3P 直针 中间空1P 米黄色 袋装

PJ NO: 123-2J5-030001-X3G

SIZE:A4 DRW NO:

FINISH:SEE NOTES

SCALE:N/A REV: A0

MAT'L:SEE NOTES

UNIT:mm PAGE: 2/2