
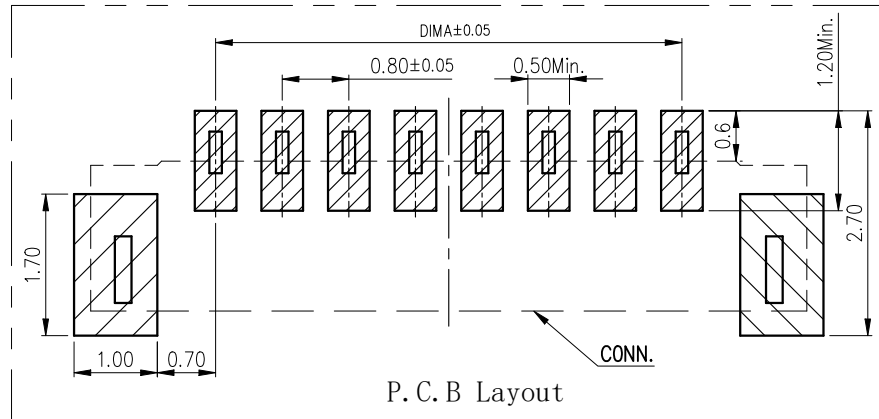
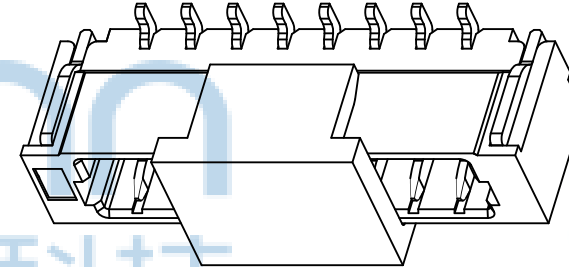

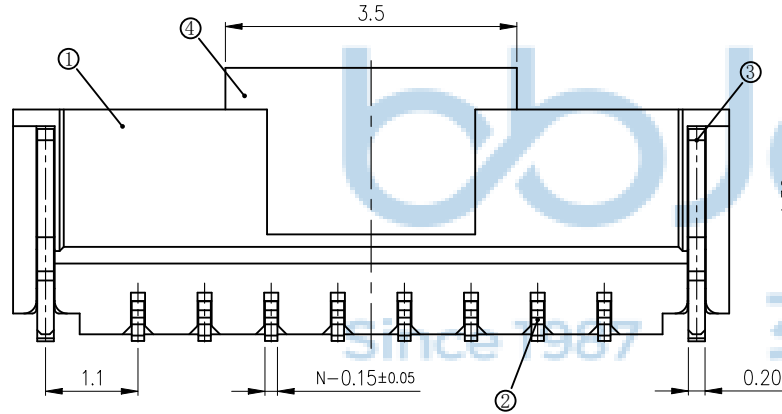
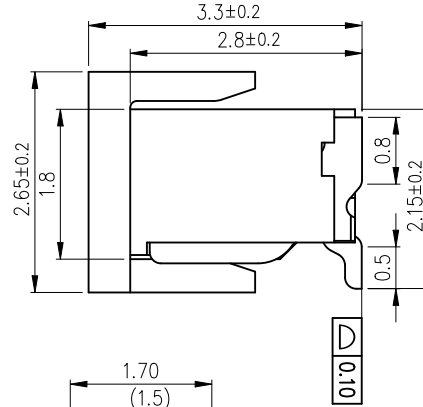


REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$ 。
3. 额定电压: 30V, AC/DC。
4. 耐电压: 200V, AC/minute。
5. 接触电阻: $\leq 0.02\Omega$ 。
6. 绝缘电阻: $\geq 100\Omega$ 。
7. 额定电流: 0.5A AC/DC。

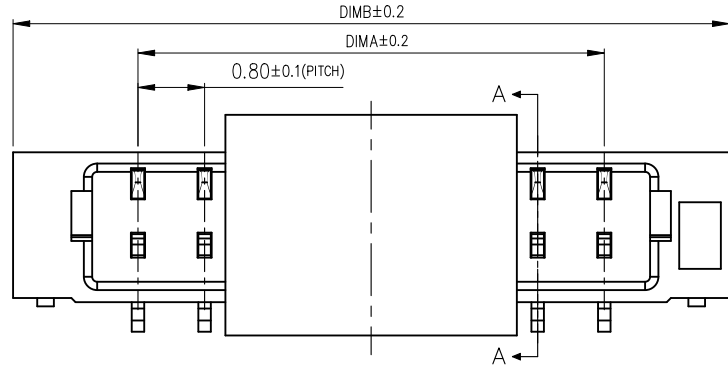

序号	品名	材质
①	胶芯	LCP UL94V-0 米黄色
②	端子	铜合金/表面镀锡
③	焊片	铜合金/表面镀金
④	吸盖	LCP UL94V-0 黑色

CKT	DIM A	DIM B	CKT	DIM A	DIM B
2	0.80	3.80	16	12.00	15.00
3	1.60	4.60	17	12.80	15.80
4	2.40	5.40	18	13.60	16.60
5	3.20	6.20	19	14.40	17.40
6	4.00	7.00	20	15.20	18.20
7	4.80	7.80	21	16.00	19.00
8	5.60	8.60	22	16.80	19.80
9	6.40	9.40	23	17.60	20.60
10	7.20	10.20	24	18.40	21.40
11	8.00	11.00	25	19.20	22.20
12	8.80	11.80	26	20.00	23.00
13	9.60	12.60	27	20.80	23.80
14	10.40	13.40	28	21.60	24.60
15	11.20	14.20			

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1




深圳市步步精科技有限公司

NAME: 针座 0.8-5P 立贴 LCP米黄色 加盖编带	
APPD	JM_Zheng
CHKD	LYX
DR	SGF
FINISH:SEE	NOTES
SCALE:N/A	REV: A0
MAT'L:SEE	NOTES
UNIT:mm	PAGE: 1/2


REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

NOTE(注):

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX: 1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
(载带材料: 透明抗静电 PS, 冷封.)
5. THICKNESS: $0.30 \pm 0.05\text{mm}$. (载带厚度: $0.30 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 20.5 METERS. (每卷包装长度: 20.5米.)
7. COMPONENT LOAD PER REEL: 2500 PCS. (每卷包装数量: 2500只, 前后各空包28只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

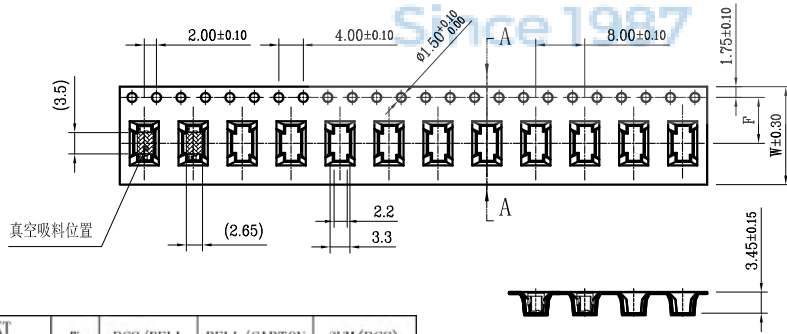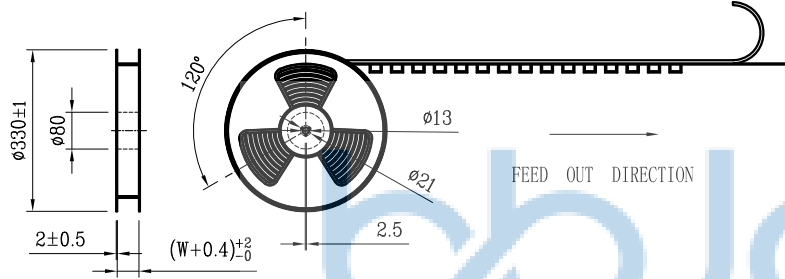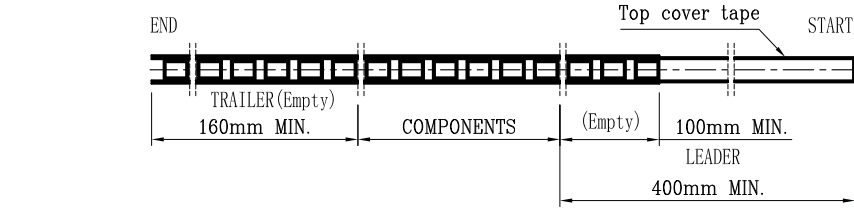

CKT (0.80mm pitch)	W	PCS/REEL	REEL/CARTON	SUM(PCS)
2	12	2500	18	45000
3	12	2500	18	45000
4	12	2500	14	35000
5	16	2500	14	35000
6	16	2500	14	35000
7	16	2500	14	35000
8	16	2500	14	35000
9	24	2500	10	25000
10	24	2500	10	25000
11	24	2500	10	25000
12	24	2500	10	25000
13	24	2500	10	25000
14	24	2500	10	25000
15	24	2500	10	25000
16	24	2500	10	25000
17	24	2500	10	25000
18	24	2500	10	25000

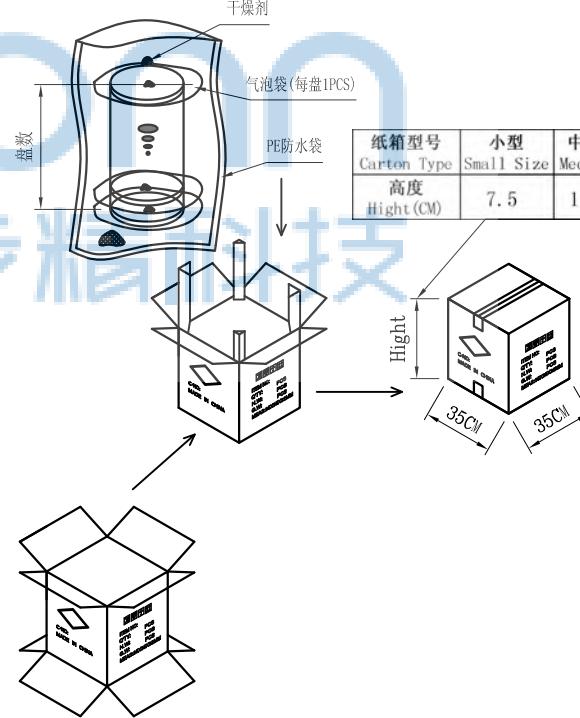

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32

CKT (0.80mm pitch)	B0	W	F
2	4.10	12	5.5
3	4.90	12	5.5
4	5.70	16	7.5
5	6.50	16	7.5
6	7.30	16	7.5
7	8.10	16	7.5
8	8.90	16	7.5
9	9.70	24	11.5
10	10.50	24	11.5
11	11.30	24	11.5
12	12.10	24	11.5
13	12.90	24	11.5
14	13.70	24	11.5
15	14.50	24	11.5
16	15.30	24	11.5
17	16.10	24	11.5
18	16.90	24	11.5

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 X'': $\pm 2'$
.XXX: ± 0.13 .XX': $\pm 1'$

APPD JM_Zheng
CHKD LYX

DR SGF

NAME:
针座 0.8-5P 立贴 LCP米黄色 加盖编带

PJ NO: 123-234-050001-X3G
SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES
SCALE: N/A REV: A0 UNIT: mm PAGE: 2/2