
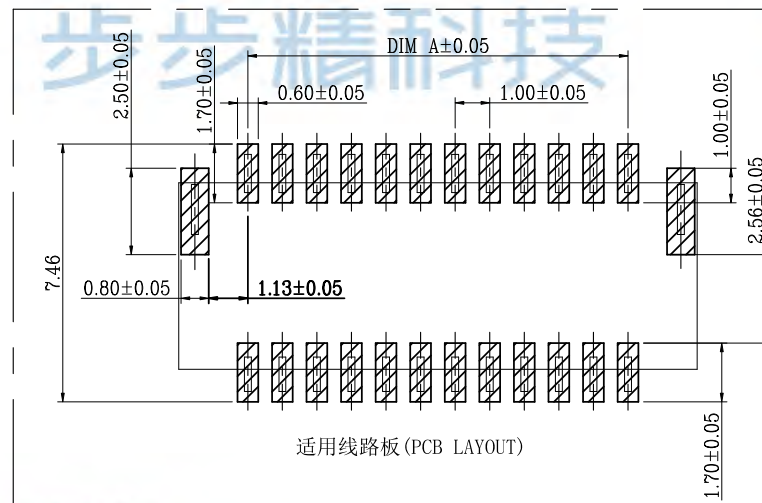
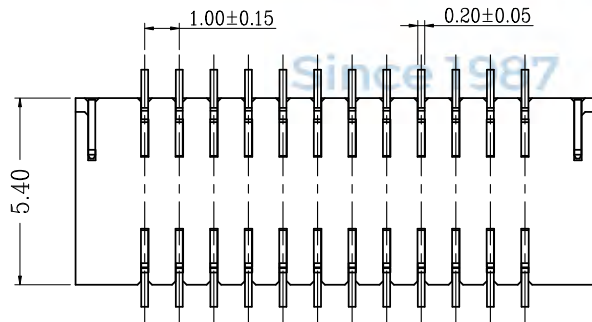

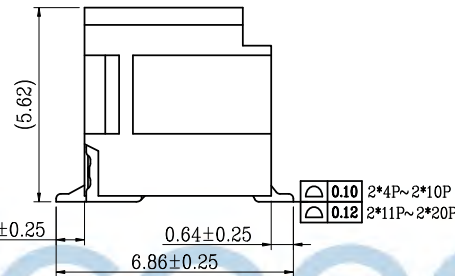



技术参数：

- 1.额定电流：1.0A DC/AC.
- 2.额定电压：50V DC/AC.
- 3.耐电压：500V AC/minute.
- 4.接触电阻：20mΩ Max.
- 5.绝缘电阻：100MΩ Min.
- 6.工作温度：-25℃~+85℃.

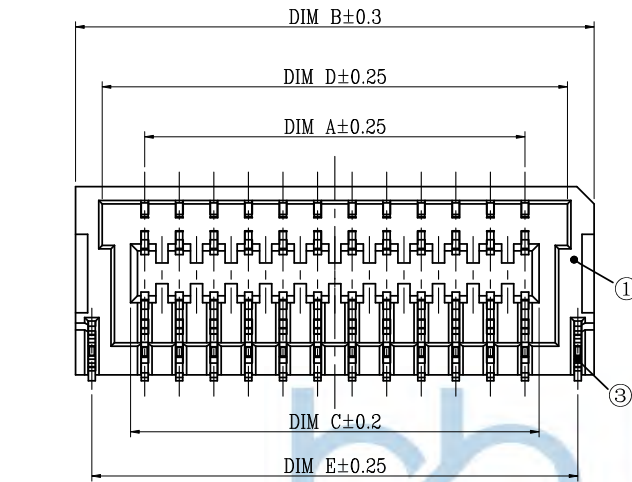

CKT	A	B	C	D	E
2*4	3.00	7.00	3.82	5.46	6.06
2*5	4.00	8.00	4.82	6.46	7.06
2*6	5.00	9.00	5.82	7.46	8.06
2*7	6.00	10.00	6.82	8.46	9.06
2*8	7.00	11.00	7.82	9.46	10.06
2*9	8.00	12.00	8.82	10.46	11.06
2*10	9.00	13.00	9.82	11.46	12.06
2*11	10.00	14.00	10.82	12.46	13.06
2*12	11.00	15.00	11.82	13.46	14.06
2*13	12.00	16.00	12.82	14.46	15.06
2*14	13.00	17.00	13.82	15.46	16.06
2*15	14.00	18.00	14.82	16.46	17.06
2*16	15.00	19.00	15.82	17.46	18.06
2*17	16.00	20.00	16.82	18.46	19.06
2*18	17.00	21.00	17.82	19.46	20.06
2*19	18.00	22.00	18.82	20.46	21.06
2*20	19.00	23.00	19.82	21.46	22.06





序号	产品名称	材料规格	表面处理/颜色	数量
1	胶芯	LCP	本色	1
2	端子	铜合金	镀金/镀镍	/
3	焊片	铜合金	镀锡/镀镍	2



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0456-1

深圳市步步精科技有限公司

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*	NAME: 针座 SHLD 1.0-2x15P B型 双排卧贴4带扣 无柱 米黄色 镀金 加盖编带
APPD JM_Zheng	CHKD Tang	PJ NO: 123-241-300004-X3G
DR LYX		SIZE:A4 DRW NO:
		FINISH:SEE NOTES MAT'L:SEE NOTES
		SCALE:N/A REV:A0 UNIT:mm PAGE: 1/2

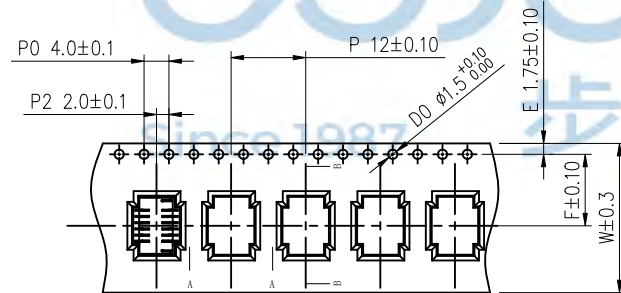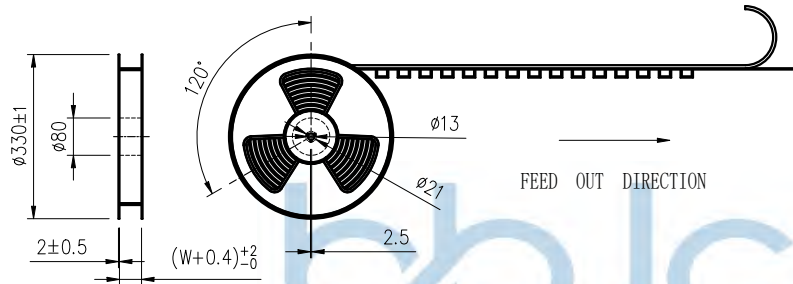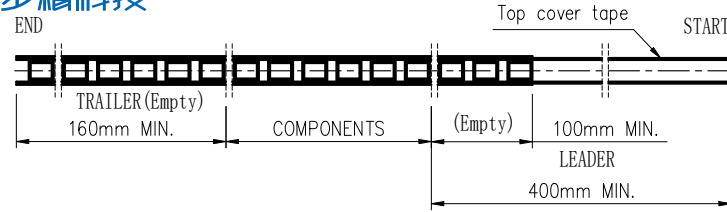

NOTE(注):

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
(载带拱/弧形MAX:1/250mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: Black antistatic PS.
(载带材料: 黑色防静电PS.)
5. THICKNESS: $0.40 \pm 0.05\text{mm}$. (载带厚度: $0.40 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 10.08 METERS. (每卷包装长度: 10.08米.)
7. COMPONENT LOAD PER REEL: 800 PCS. (每卷包装数量: 800只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.



纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32




CKT (1.00mm pitch)	B0	W	F
2*4	7.30	16	7.50
2*5	8.30	24	11.50
2*6	9.30	24	11.50
2*7	10.30	24	11.50
2*8	11.30	24	11.50
2*9	12.30	24	11.50
2*10	13.30	24	11.50
2*11	14.30	24	11.50

CKT (1.0mm pitch)	W	PCS/REEL	REEL/CARTON	SUM(PCS)
2*4	16	800	14	11200
2*5	24	800	10	8000
2*6	24	800	10	8000
2*7	24	800	10	8000
2*8	24	800	10	8000
2*9	24	800	10	8000
2*10	24	800	10	8000
2*11	24	800	10	8000






THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0456-1

深圳市步步精科技有限公司
NAME: 针座 SHLD 1.0-2x15P B型 双排卧贴4代
带扣 无柱 米黄色 镀金 加盖编带
PJ NO: 123-241-300004-X3G
SIZE:A4 DRW NO:
FINISH:SEE NOTES MAT'L:SEE NOTES
SCALE:N/A REV:A0 UNIT:mm PAGE:2/3

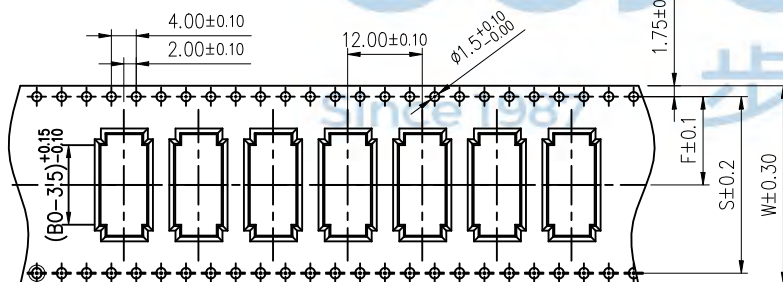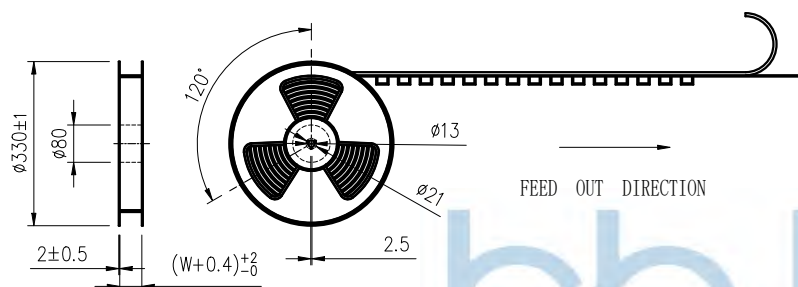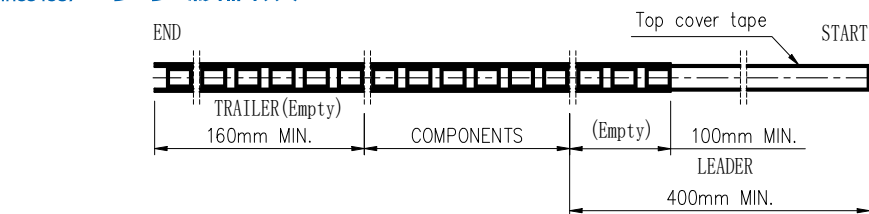

CKT	W	PCS/R ELL	RELL/CA RTON	SUM (PCS)
(1.0mm pitch)				
2*12	32	800	8	6400
2*13				
2*14				
2*15				
2*16				
2*17				
2*18	44	800	6	4800
2*19				
2*20				

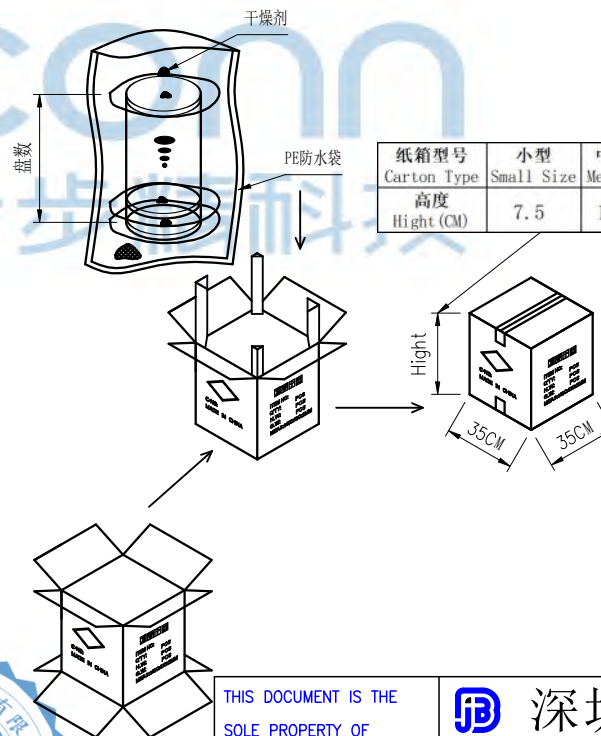

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32



CKT	B0	W	F	S
(1.0mm pitch)				
2*12	15.30	32	14.20	28.40
2*13	16.30			
2*14	17.30			
2*15	18.30			
2*16	19.30			
2*17	20.30			
2*18	21.30			
2*19	22.30	44	20.20	40.40
2*20	23.30			

NOTE (注) :

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
(载带拱/弧形MAX:1/250mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: Black antistatic PS.
(载带材料: 黑色抗静电PS.)
5. THICKNESS: $0.40 \pm 0.05\text{mm}$. (载带厚度: $0.40 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 10.08 METERS. (每卷包装长度: 10.08米.)
7. COMPONENT LOAD PER REEL: 800 PCS. (每卷包装数量: 800只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保利龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0456-1



 深圳市步步精科技有限公司

.X: ± 0.38	X*: ± 3
.XX: ± 0.25	.X*: ± 2
.XXX: ± 0.13	.XX*: ± 1

APPD	JM_Zheng
------	----------

CHKD	Tang
------	------

DR

LYX

NAME: 针座 SHLD 1.0-2x15P B型 双排卧贴4代 带扣 无柱 米黄色 镀金 加盖编带
--

	PJ NO:123-241-300004-X3G
---	--------------------------

	SIZE:A4	DRW NO:
---	---------	---------

FINISH:SEE NOTES

FINISH:SEE NOTES
SCALE:N/A REV:A

	MAT'L:SEE NOTES
--	-----------------

MAT E.SEL NOTES	
UNIT:mm	PAGE:3/3