
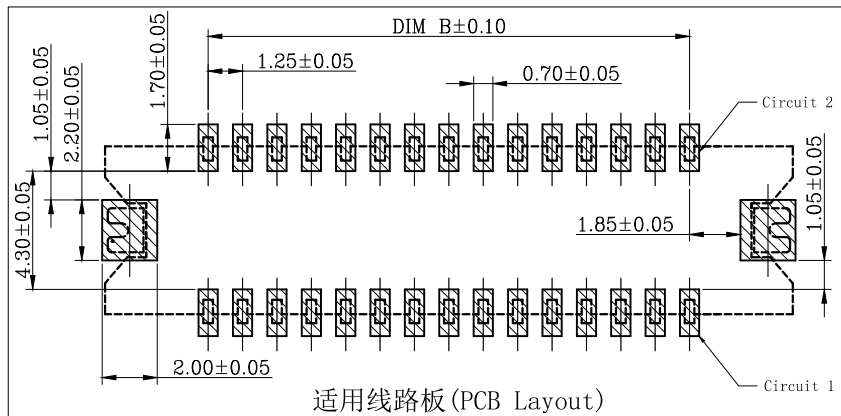
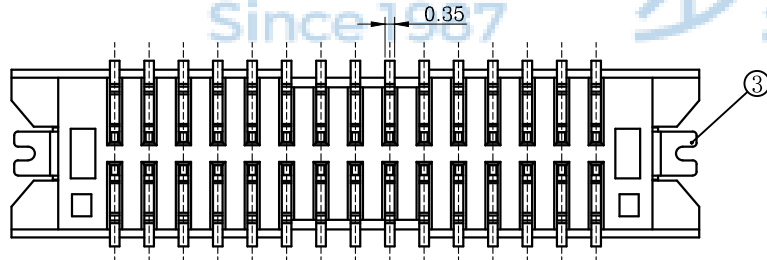

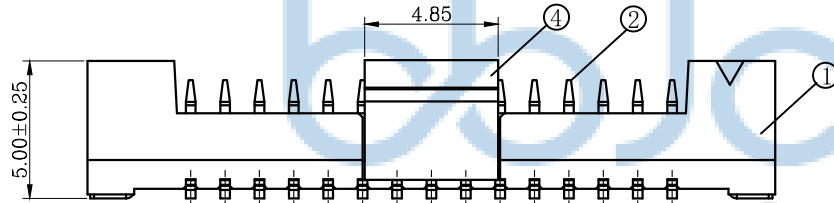
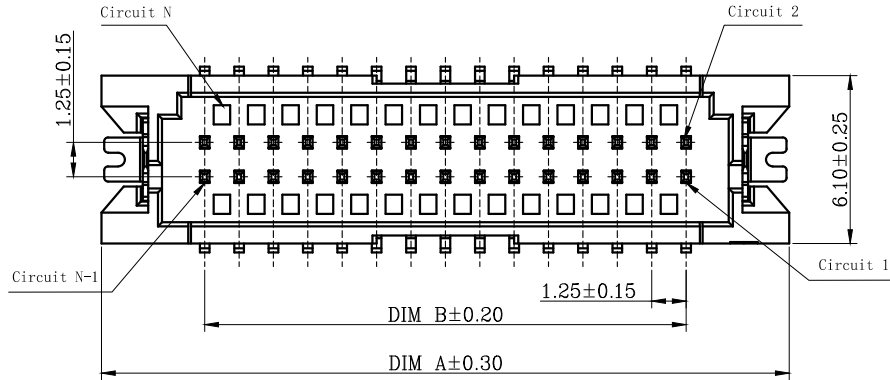


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	LYL

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
3. 额定电压: 150V AC/DC.
4. 额定电流: 1.0A AC/DC (AWG#28).
5. 接触电阻: $\leq 20\text{m}\Omega$ (Initial) per contact, $\leq 40\text{m}\Omega$ Change allowed.
6. 绝缘电阻: $\geq 500\text{M}\Omega$.
7. 耐电压: 500V AC (Minute)

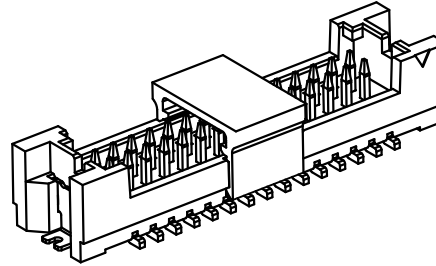


CKT	A	B
2*5	12.50	5.00
2*6	13.75	6.25
2*7	15.00	7.50
2*8	16.25	8.75
2*9	17.50	10.00
2*10	18.75	11.25
2*11	20.00	12.50
2*12	21.25	13.75
2*13	22.50	15.00
2*14	23.75	16.25
2*15	25.00	17.50
2*16	26.25	18.75
2*17	27.50	20.00
2*18	28.75	21.25
2*19	30.00	22.50
2*20	31.25	23.75
2*21	32.50	25.00
2*22	33.75	26.25
2*23	35.00	27.50
2*24	36.25	28.75
2*25	37.50	30.00

序号	产品名称	材料规格	表面处理/颜色	数量
1	胶芯	PA6T UL94V-0	本色	1
2	端子	铜合金	镀锡/镍	N
3	焊片	铜合金	镀锡/镍	2
4	吸取盖	LCP UL94V-0	本色	1

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0456-1		DR. LYL		NAME: 针座 1.25-2x6P 双排 立贴 加盖 本色		PJ. NO.: 123-254-120001-X3G		SIZE: A4 DRW NO.:		FINISH: SEE NOTES		MAT'L.: SEE NOTES		SCALE: N/A		REV.: A0		UNIT: mm		PAGE: 1/2	
--	--	-----------------	--	---------	--	--------------------------------	--	-----------------------------	--	-------------------	--	-------------------	--	-------------------	--	------------	--	----------	--	----------	--	-----------	--








深圳市步步精科技有限公司

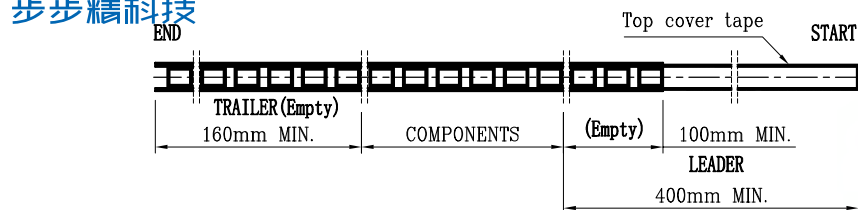

NOTE (注) :

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
(载带拱/弧形MAX:1/250mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: Black antistatic PS.
(载带材料: 黑色抗静电PS.)
5. THICKNESS: $0.40 \pm 0.05\text{mm}$. (载带厚度: $0.40 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 12.48 METERS. (每卷包装长度: 12.48米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

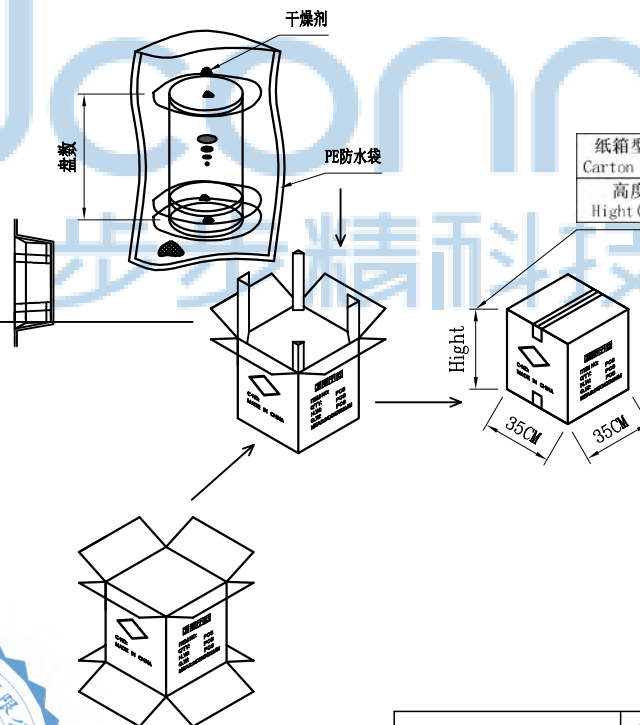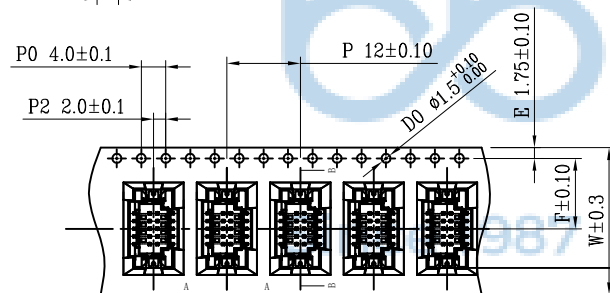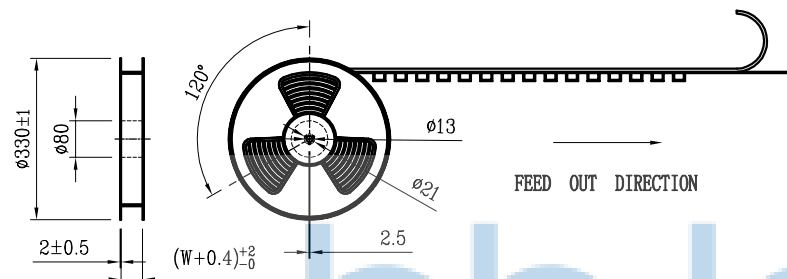

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32

CKT	B0	W	F
(1.25mm pitch)			
2*5	12.80	24	11.50
2*6	14.05	24	11.50

CKT	W	PCS/RELL	RELL/CARTON	SUM(PCS)
(1.25mm pitch)				
2*5	24	1000	10	10000
2*6	24	1000	10	10000



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

 深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^*$
.XX: ± 0.25	.X*: $\pm 2^*$
.XXX: ± 0.13	.XX*: $\pm 1^*$

APPD	JM_Zheng
------	----------

CHKD	LYX
------	-----

NAME: 针座 1.25-2x6P 双排 立贴 加盖 本色

	PJ NO: 123-254-120001-X3G
---	---------------------------

	SIZE:A4	DRW NO:
---	---------	---------

FINISH:SEE NOTES		MAT'L:SEE NOTES	
SCALE:N/A	REV: A0	UNIT:mm	PAGE: 2/2

PDWG NO:0456-1

DR	SGF
----	-----

SCALF:N/A	REV: A0
-----------	---------

UNIT:mm		PAGE: 2/2
---------	--	-----------