

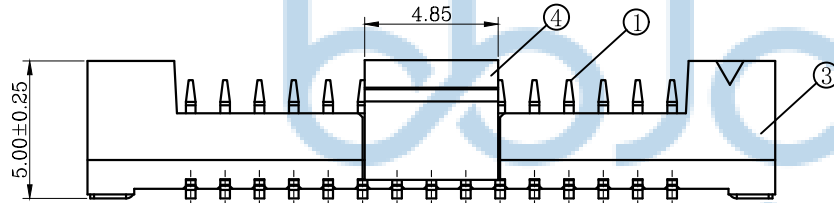
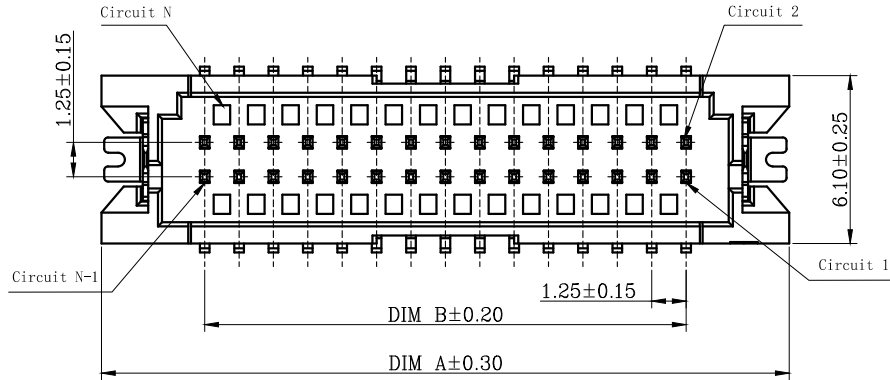


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	LYL



技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
3. 额定电压: 150V AC/DC.
4. 额定电流: 1.0A AC/DC (AWG#28).
5. 接触电阻: $\leq 20\text{m}\Omega$ (Initial) per contact, $\leq 40\text{m}\Omega$ Change allowed.
6. 绝缘电阻: $\geq 500\text{M}\Omega$.
7. 耐电压: 500V AC (Minute)

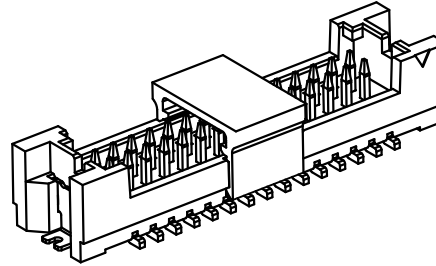

序号	品名	材质
①	1.25A型双排立式端子	黄铜/表面镀锡80u" Min, 镀镍30u" Min
②	1.25A型双排立式焊片	黄铜/表面镀锡80u" Min, 镀镍30u" Min
③	1.25A型双排立式胶芯	PA6T UL94V-0 本色
④	1.25A型双排立式吸盖	LCP UL94V-0 本色

CKT	A	B
2*5	12.50	5.00
2*6	13.75	6.25
2*7	15.00	7.50
2*8	16.25	8.75
2*9	17.50	10.00
2*10	18.75	11.25
2*11	20.00	12.50
2*12	21.25	13.75
2*13	22.50	15.00
2*14	23.75	16.25
2*15	25.00	17.50
2*16	26.25	18.75
2*17	27.50	20.00
2*18	28.75	21.25
2*19	30.00	22.50
2*20	31.25	23.75
2*21	32.50	25.00
2*22	33.75	26.25
2*23	35.00	27.50
2*24	36.25	28.75
2*25	37.50	30.00

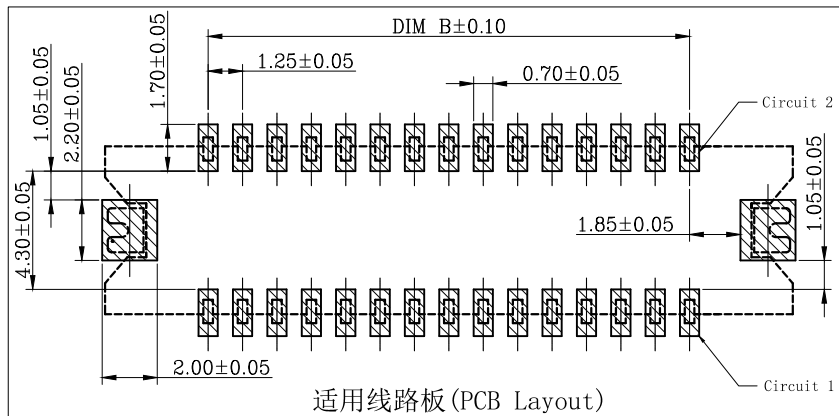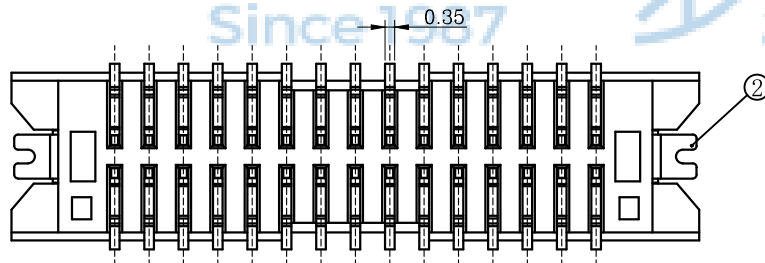





适用线路板 (PCB Layout)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0456-1		针座 1.25-2x8P 双排 立贴 加盖 本色	
DR. LYL		PJ. NO.:123-254-160002-X3G	
CHKD. LYX		SIZE: A4 DRW NO.:	
APPD. JM_Zheng		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

NOTE(注):

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
(载带拱/弧形MAX:1/250mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATTRIAL:Black antistatic PS.
(载带材料:黑色防静电PS.)
5. THICKNESS:0.40 $\pm$ 0.05mm. (载带厚度:0.40 $\pm$ 0.05mm.)
6. PACKING LENGHT PER REEL: 12.48 METERS. (每卷包装长度:12.48米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量:1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

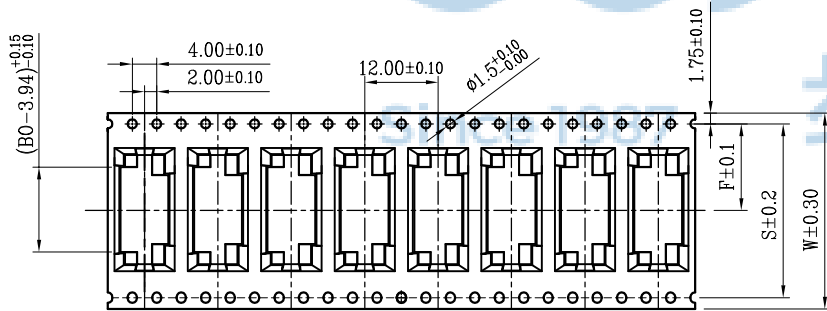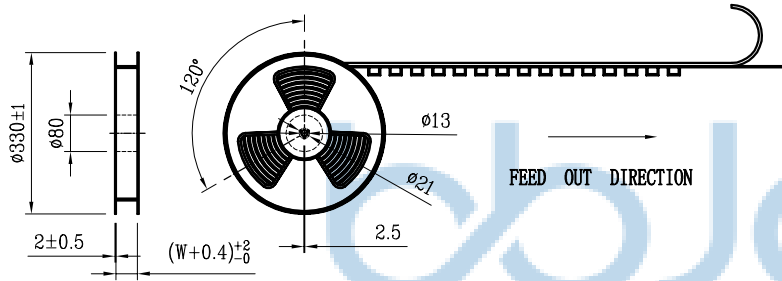
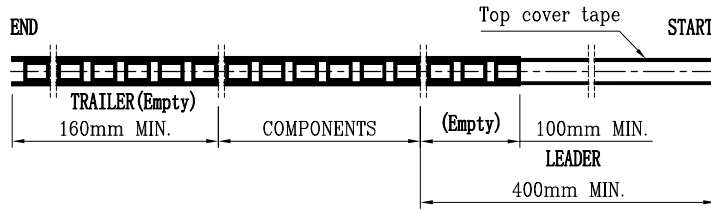


纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Hight (CM)	7.5	15	32



CKT (1.25mm pitch)	BO	W	F	S
2*7	15.30	32	14.20 $\pm$ 0.15	28.4
2*8	16.55		14.20 $\pm$ 0.15	28.4
2*9	17.80		14.20 $\pm$ 0.15	28.4
2*10	19.05		14.20 $\pm$ 0.15	28.4
2*11	20.30		14.20 $\pm$ 0.15	28.4
2*12	21.55		20.2 $\pm$ 0.15	40.4
2*13	22.80		20.2 $\pm$ 0.15	40.4
2*14	24.05		20.2 $\pm$ 0.15	40.4
2*15	25.30		20.2 $\pm$ 0.15	40.4
2*16	26.55		20.2 $\pm$ 0.15	40.4
2*17	27.80	44	20.2 $\pm$ 0.15	40.4
2*18	29.05		20.2 $\pm$ 0.15	40.4
2*19	30.30		20.2 $\pm$ 0.15	40.4
2*20	31.55		20.2 $\pm$ 0.15	40.4
2*21	32.80		20.2 $\pm$ 0.15	40.4
2*22	34.05		26.2 $\pm$ 0.15	52.4
2*23	35.30		26.2 $\pm$ 0.15	52.4
2*24	36.55		26.2 $\pm$ 0.15	52.4
2*25	37.80		26.2 $\pm$ 0.15	52.4

CKT (1.25mm pitch)	W	PCS/REEL	REEL/CARTON	SUM(PCS)
2*7	32	1000	8	8000
2*8	32	1000	8	8000
2*9	32	1000	8	8000
2*10	32	1000	8	8000
2*11	32	1000	8	8000
2*12	44	1000	6	6000
2*13	44	1000	6	6000
2*14	44	1000	6	6000
2*15	44	1000	6	6000
2*16	44	1000	6	6000
2*17	44	1000	6	6000
2*18	44	1000	6	6000
2*19	44	1000	6	6000
2*20	44	1000	6	6000
2*21	44	1000	6	6000
2*22	56	1000	5	5000
2*23	56	1000	5	5000
2*24	56	1000	5	5000
2*25	56	1000	5	5000

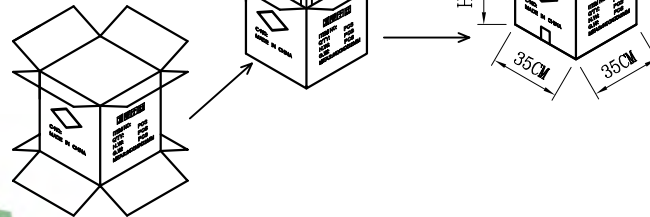

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO:0456-1



深圳市步步精科技有限公司

.X: ± 0.38 X': $\pm 3'$
.XX: ± 0.25 X'': $\pm 2'$
.XXX: ± 0.13 X''': $\pm 1'$

APPD JM_Zheng
CHKD LYX

DR XH

NAME: 针座 1.25-2x8P 双排 立贴 加盖 本色

PJ NO: 123-254-160002-X3G
SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV: A0 UNIT:mm PAGE: 2/2