
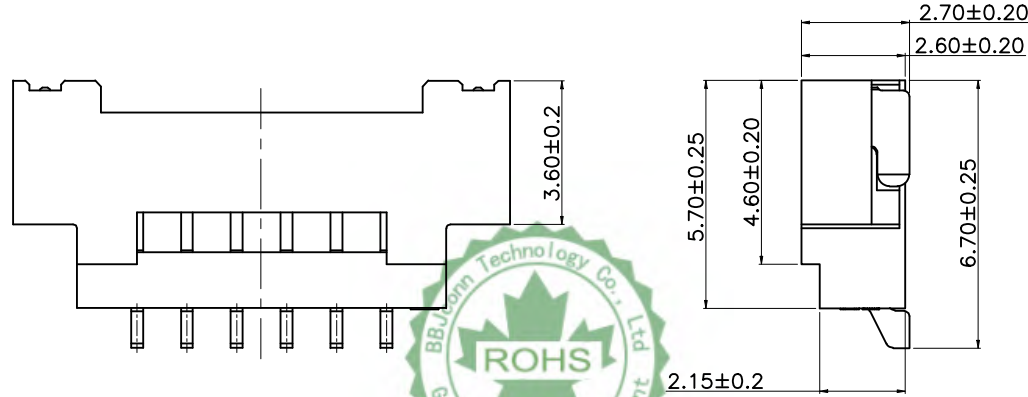
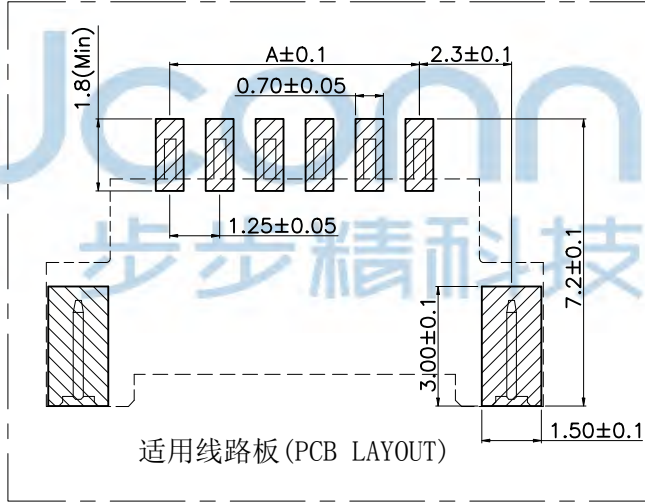
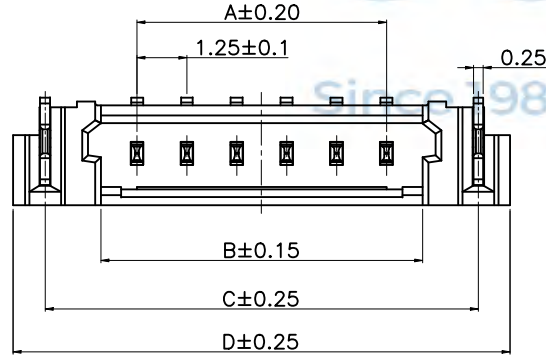
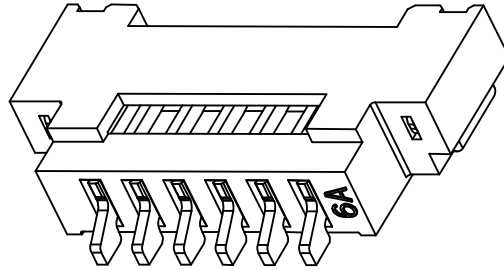


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	LYX

技术指标(Technical Index) :
1.温度范围(Temperature range): - 25° C~+85° C.
2.额定电压(Rated voltage) :150V, AC, DC.
3.额定电流(Rated current): 1.0A AC, DC.
4.接触电阻(Contact resistance) : < 20mΩ
5.耐压值(Withstanding voltage): 500V AC/ minute.
6.绝缘电阻(Insulation resistance) :≥500MΩ.

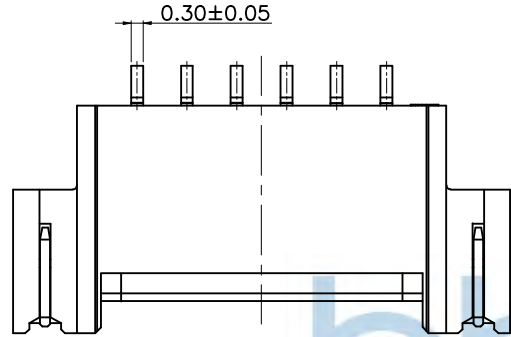

CKT	A	B	C	D
2	1.25	3.05	5.85	7.45
3	2.50	4.30	7.10	8.70
4	3.75	5.55	8.35	9.95
5	5.00	6.80	9.60	11.20
6	6.25	8.05	10.85	12.45
7	7.50	9.30	12.10	13.70
8	8.75	10.55	13.35	14.95
9	10.00	11.80	14.60	16.20
10	11.25	13.05	15.85	17.45
11	12.50	14.30	17.10	18.70
12	13.75	15.55	18.35	19.95
13	15.00	16.80	19.60	21.20
14	16.25	18.05	20.85	22.45
15	17.50	19.30	22.10	23.70
16	18.75	20.55	23.35	24.95
18	21.25	23.05	25.85	27.45
20	23.75	25.55	28.35	29.95
30	36.25	38.05	40.85	42.45

序号	品名	材质
①	胶芯	LCP UL94V-0 本色
②	端子	铜合金/表面镀锡
③	焊片	铜合金/表面镀锡

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.

PDWG NO:0456-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'

NAME: 针座 DF-16 (1.25-20P) 卧贴 LCP本色 编带

PJ NO:123-255-200001-X3G

SIZE:A4

DRW NO:

FINISH:SEE NOTES

MAT'L:SEE NOTES

SCALE:N/A

REV:A0

UNIT:mm

PAGE: 1/2

APPD JM_Zheng

CHKD Tang





DR LYX



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	LYX

NOTE(注):

- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
- 2.CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX:1/100mm.)
- 3.ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
- 4.MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING.
(载带材料: 透明防静电 PS, 冷封.)
5. THICKNESS: $0.30 \pm 0.05\text{mm}$. (载带厚度: $0.30 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 24.384METERS. (每卷包装长度: 24.384米.)
7. COMPONENT LOAD PER REEL: 2000 PCS. (每卷包装数量: 2000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

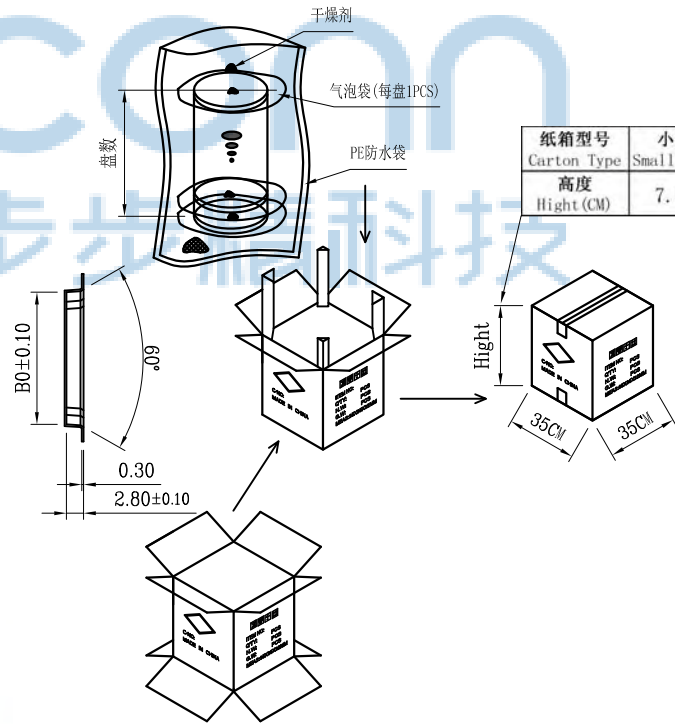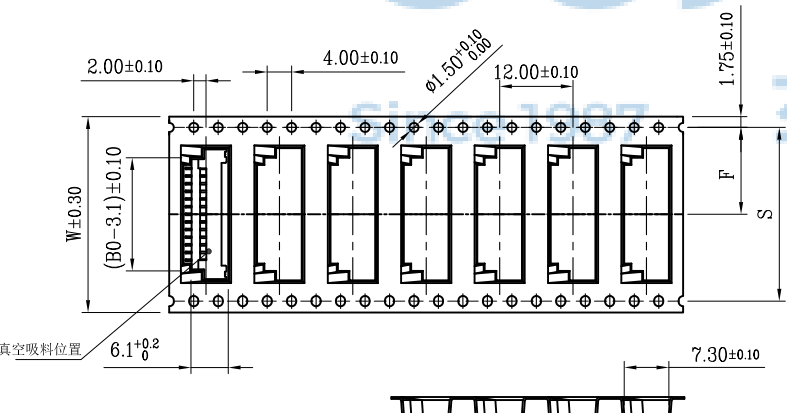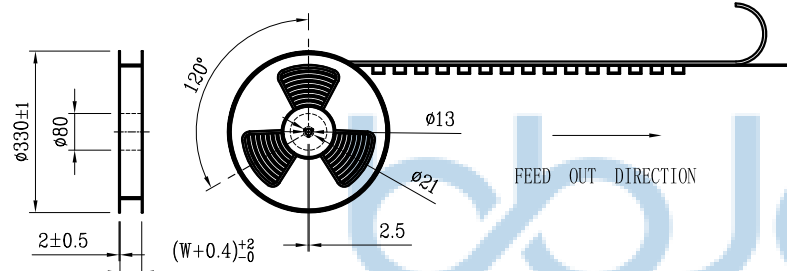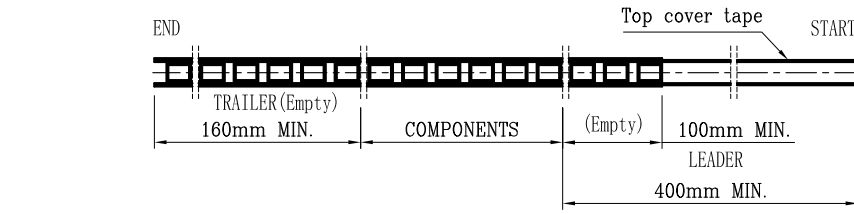

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32

CKT (1.25mm pitch)	BO	W	F	S
9	16.60	32	14.20 ± 0.10	28.40
10	17.85			
11	19.10			
12	20.35			
13	21.60			
14	22.85			
15	24.10	44	20.20 ± 0.10	40.40
16	25.35			
17	26.60			
18	27.85			
19	29.10			
20	30.35			
21	31.60	56	26.2 ± 0.10	52.40
22	32.85			
23	34.10			
24	35.35			
25	36.60			
26	37.85			
27	39.10			
28	40.35			
29	41.60			
30	42.85			



CKT (1.25mm pitch)	W	PCS/REEL	REEL/CARTON	SUM (PCS)
9	32	2000	8	16000
10				
11				
12				
13				
14				
15	44	2000	6	12000
16				
17				
18				
19				
20				
21	56	2000	4	8000
22				
23				
24				
25				
26				
27				
28				
29				
30				

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13 X': $\pm 3'$ X'': $\pm 2'$ XX': $\pm 1'$		NAME: 针座 DF-16 (1.25-20P) 卧贴 LCP本色 编带	
APPD.	JM_Zheng	PJ. NO: 123-255-200001-X3G		SIZE: A4 DRW NO.:	
CHKD.	Tang	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG. NO:	0456-1	DR.	LYX	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2