



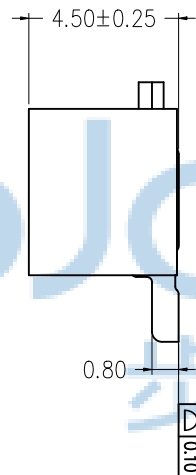


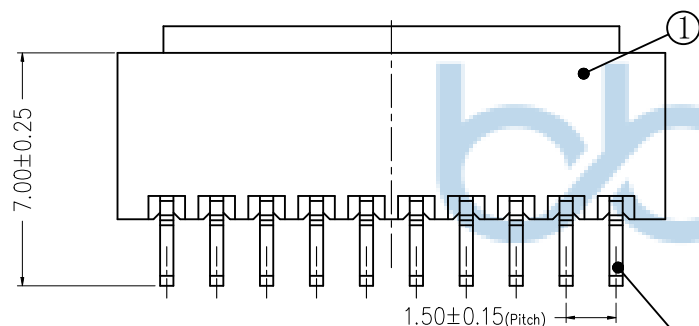


REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
3. 额定电压: 350V, AC/DC.
4. 接触电阻: $\leq 0.02\Omega$.
5. 绝缘电阻: $\geq 1000\text{M}\Omega$.
6. 额定电流: 3A, AC/DC.

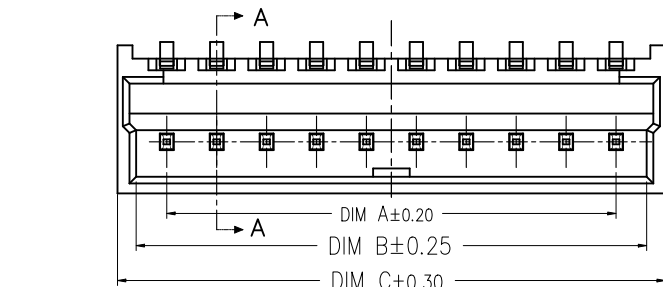

CKT	DIM A	DIM B	DIM C
2	1.50	3.35	4.46
3	3.00	4.85	5.96
4	4.50	6.35	7.46
5	6.00	7.85	8.96
6	7.50	9.35	10.46
7	9.00	10.85	11.96
8	10.50	12.35	13.46
9	12.00	13.85	14.96
10	13.50	15.35	16.46
11	15.00	16.85	17.96
12	16.50	18.35	19.46
13	18.00	19.85	20.96
14	19.50	21.35	22.46
15	21.00	22.85	23.96
16	22.50	24.35	25.46

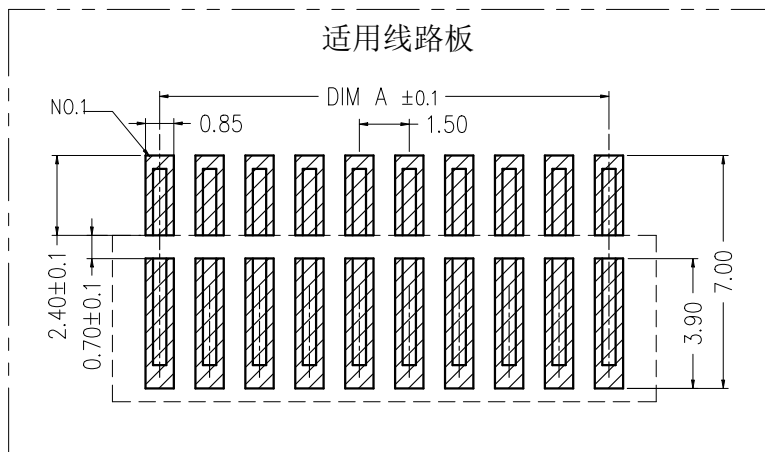







序号	品名	材质
①	胶芯	LCP UL94V-0 米黄色
②	端子	黄铜/表面镀雾锡

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0456-1

深圳市步步精科技有限公司	
NAME: 针座 1.5-4P K型 卧贴 不带扣 LCP米黄色 编带	
PJ NO: 123-261-040001-X3G	
SIZE: A4 DRW NO:	
FINISH: SEE NOTES MAT'L: SEE NOTES	
SCALE: N/A REV: A0 UNIT: mm PAGE: 1/2	

NOTE (注):

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2mm$.
(10孔孔距累积公差 $\pm 0.2mm$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX: 1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS. (载带材料: 透明抗静电 PS.)
5. THICKNESS: $0.35 \pm 0.05mm$. (载带厚度: $0.35 \pm 0.05mm$.)
6. PACKING LENGTH PER REEL: 12.384 METERS. (每卷包装长度: 12.384米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. Carton packing to no more than the line, using the free slots filled with plastic foam and nylon. (纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及尼龙填充.)
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

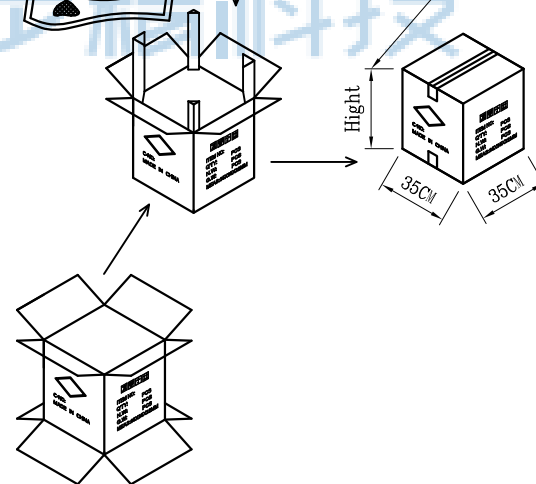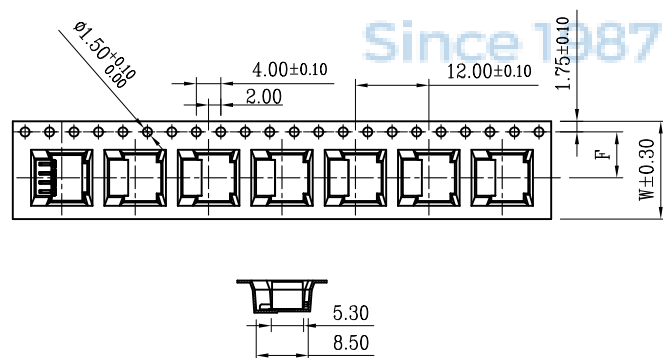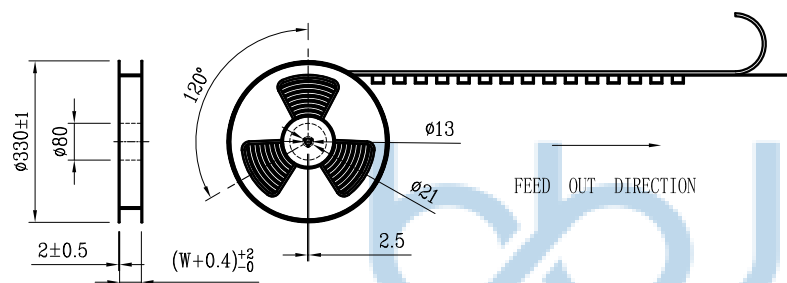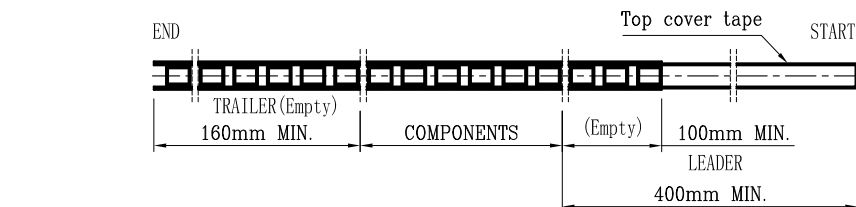

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32

CKT	B0	W	F
(1.50mm pitch)			
2	4.60	16	7.5
3	6.10		
4	7.60		
5	9.10	24	11.5
6	10.60		
7	12.10		
8	13.60		
9	15.10		

CKT (1.50mm pitch)	W	PCS/RELL	RELL/CARTON	SUM (PCS)
2	16	1000	14	14000
3				
4				
5	24	1000	10	10000
6				
7				
8				
9				



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1



 深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^\circ$
.XX: ± 0.25	.X*: $\pm 2^\circ$
.XXX: ± 0.13	.XX*: $\pm 1^\circ$

APPD	JM_Zheng
------	----------

CHKD	LYX
------	-----

DR


± 0.38	$X^*: \pm 3^*$
± 0.25	$X^*: \pm 2^*$
± 0.13	$XX^*: \pm 1^*$

o)	JM_Zheng
----	----------

0	1	Y	X
---	---	---	---

NAME: _____

针座 1.5-4P K型 卧贴 不带扣 LCP米黄色 编带



PJ NO:123-261-040001-X3G

	SIZE:A4	D
--	---------	---

ORW NO: _____

SCALF·N/A

REV. A0

UNIT:mm		PAGE: 2/
---------	--	----------

↑	E
---	---