
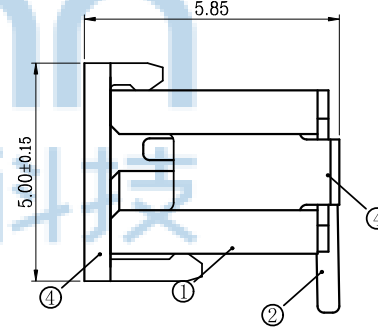
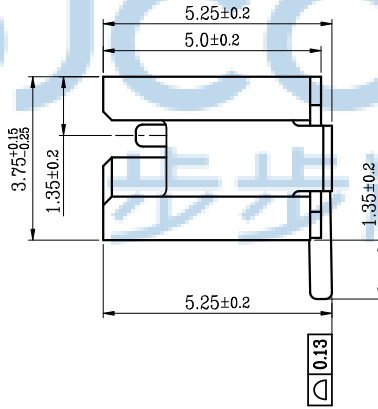
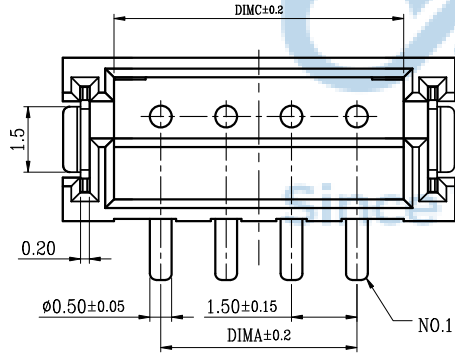
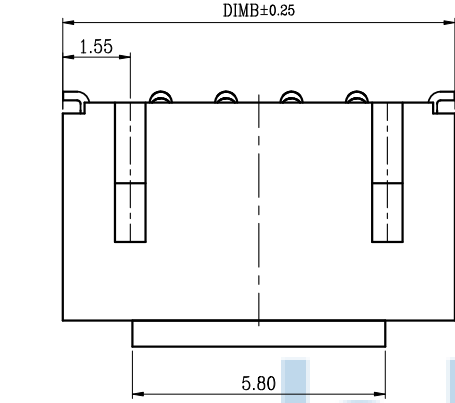



REV	ECN NO	CONTENT	DATE	ENGINEER
AO		INITIAL RELEASE	/	SGF

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
2. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
3. 额定电压: 100V, AC/DC.
4. 接触电阻: $\leq 0.02\Omega$.
5. 绝缘电阻: $\geq 500\text{M}\Omega$.
6. 额定电流: 1A, AC/DC.



With Cover

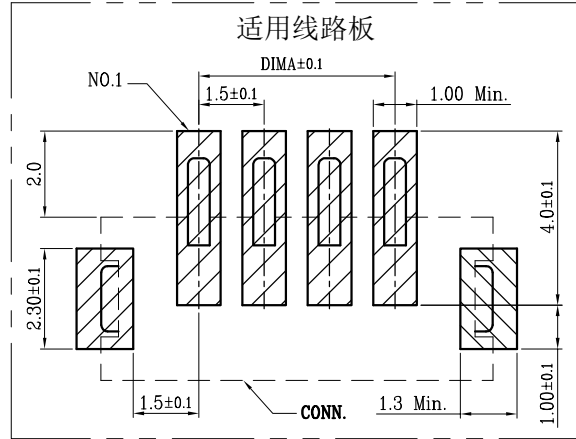




序号 (NO.)	品名 (TITLE)	材质 (Material)
①	1.5- L型立式WTB胶芯 1.50-Type-L S/T WTB Housing	LCP UL94V-0 自然色 Natural 红色 Red 黑色 Black
②	1.5- L型立式WTB端子 1.50-Type-L S/T WTB Terminal	铜合金/表面镀锡/表面镀金 Copper Alloy/Tin Plating/Surface gold plating
③	1.5- L型立式WTB焊片 1.50-Type-L S/T WTB Solder tab	铜合金/表面镀锡 Copper Alloy/Tin Plating
④	1.5- L型立式WTB吸盖 1.50-Type-L S/T WTB Cover	LCP UL94V-0 自然色 Natural



CKT	DIM A	DIM B	DIM C
2	1.50	6.00	3.65
3	3.00	7.50	5.15
4	4.50	9.00	6.65
5	6.00	10.50	8.15
6	7.50	12.00	9.65
7	9.00	13.50	11.15
8	10.50	15.00	12.65
9	12.00	16.50	14.15
10	13.50	18.00	15.65
11	15.00	19.50	17.15
12	16.50	21.00	18.65
13	18.00	22.50	20.15
14	19.50	24.00	21.65
15	21.00	25.50	23.15
16	22.50	27.00	24.65
17	24.00	28.50	26.15
18	25.50	30.00	27.65
19	27.00	31.50	29.15
20	28.50	33.00	30.65


THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3' .X': ±2' .XX': ±1'	NAME: 针座 ZH-1.5-14P L型 立贴 LCP本色 镀金 加盖编带	
APPD	JM_Zheng	④	PJ NO: 123-264-140003-X3G
CHKD	LYX	④	SIZE:A4 DRW NO:
PDWG NO: 0456-1		DR	SGF
		FINISH:SEE	NOTES
		SCALE:N/A	REV: A0
		UNIT:mm	PAGE: 1/2

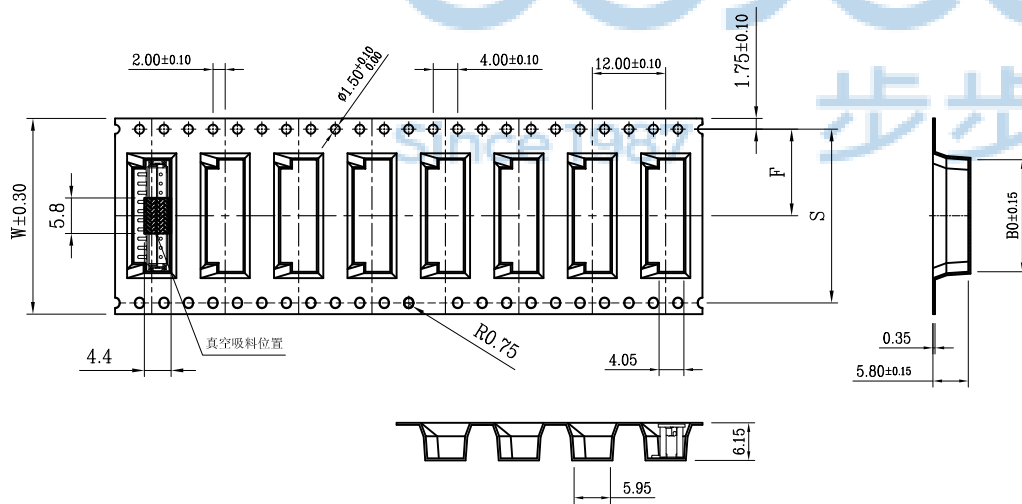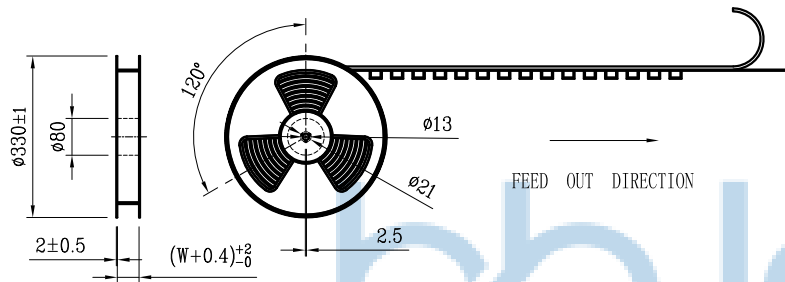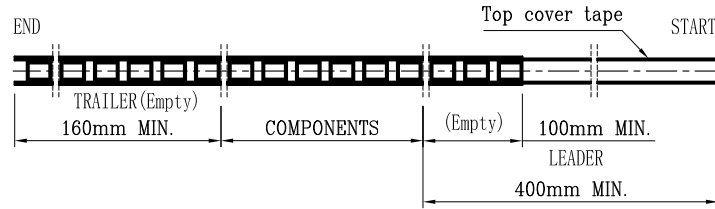

NOTE (注):

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$. (10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm. (载带拱/弧形MAX: 1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS. (所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: CLEAR ANTISTATIC PS, COLD SEALING. (载带材料: 透明抗静电 PS, 冷封.)
5. THICKNESS: $0.35 \pm 0.05\text{mm}$. (载带厚度: $0.35 \pm 0.05\text{mm}$.)
6. PACKING LENGTH PER REEL: 12.5 METERS. (每卷包装长度: 12.5米.)
7. COMPONENT LOAD PER REEL: 1000 PCS. (每卷包装数量: 1000只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

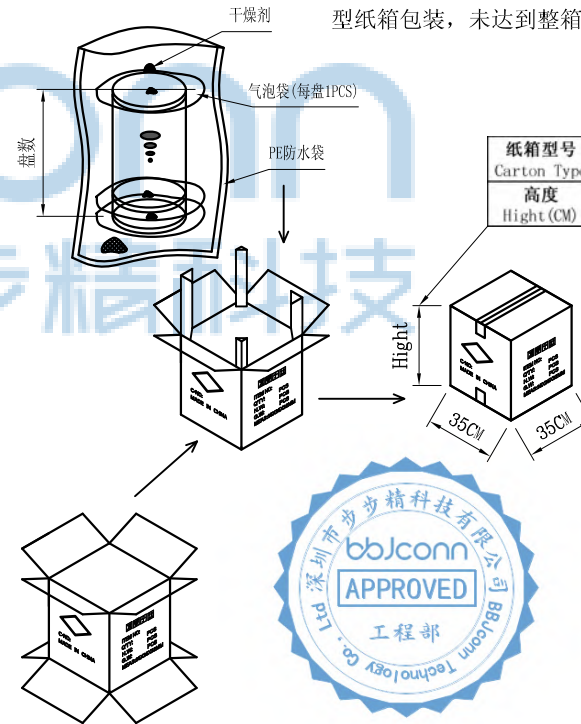

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32

CKT (1.50mm pitch)	B0	W	F	S
9	16.80	32	14.2 $\pm$ 0.15	28.40
10	18.30			
11	19.80			
12	21.30			
13	22.80	44	20.2 $\pm$ 0.15	40.40
14	24.30			
15	25.80			
16	27.30			

CKT (1.5mm pitch)	W	PCS/RELL	RELL/CARTON	SUM (PCS)
2	16	1000	14	14000
3		1000	10	10000
4		1000	10	10000
5		1000	10	10000
6	24	1000	10	10000
7		1000	10	10000
8		1000	10	10000
9		1000	10	10000
CKT (1.5mm pitch)	W	PCS/RELL	RELL/CARTON	SUM (PCS)
9	32	1000	8	8000
10		1000	8	8000
11		1000	8	8000
12		1000	8	8000
13	44	1000	6	6000
14		1000	6	6000
15		1000	6	6000
16		1000	6	6000

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.
PDWG NO: 0456-1

深圳市步步精科技有限公司

NAME: 针座 ZH-1.5-14P L型 立贴
LCP本色 镀金 加盖编带

PJ NO: 123-264-140003-X3G

SIZE: A4 DRW NO:

FINISH: SEE NOTES MAT'L: SEE NOTES

SCALE: N/A REV: A0 UNIT: mm PAGE: 2/2

APPD JM_Zheng

CHKD LYX

DR SGF