

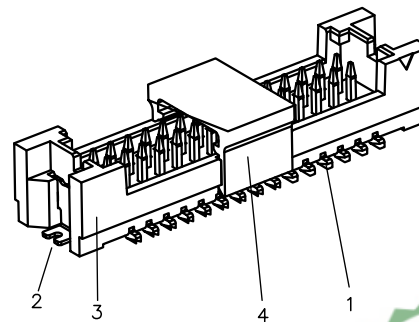
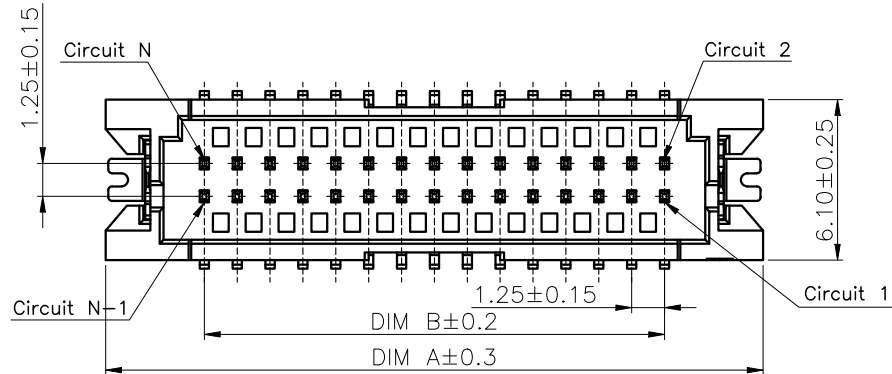
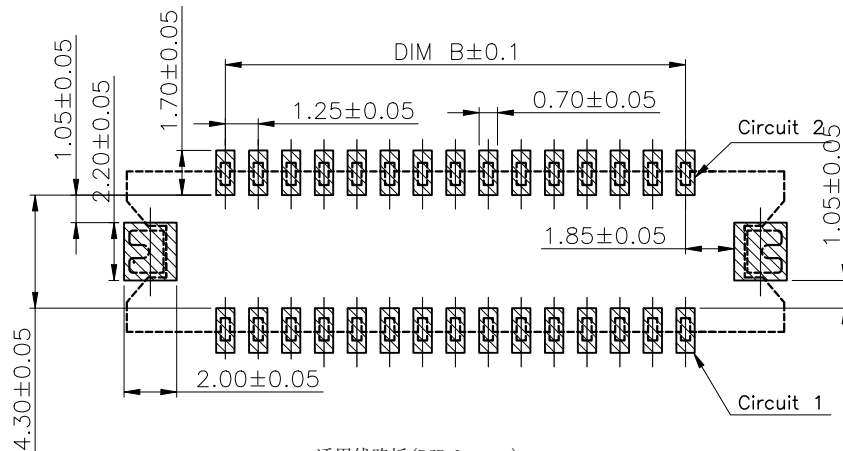
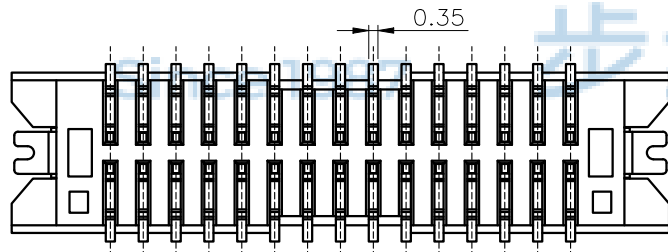


REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF



CKT	DIM A	DIM B
2*5	12.5	5.00
2*6	13.75	6.25
2*7	15.00	7.50
2*8	16.25	8.75
2*9	17.5	10.00
2*10	18.75	11.25
2*11	20.00	12.50
2*12	21.25	13.75
2*13	22.50	15.00
2*14	23.75	16.25
2*15	25.00	17.50
2*16	26.25	18.75
2*17	27.50	20.00
2*18	28.75	21.25
2*19	30.00	22.50
2*20	31.25	23.75
2*21	32.50	25.00
2*22	33.75	26.25
2*23	35.00	27.50
2*24	36.25	28.75
2*25	37.50	30.00

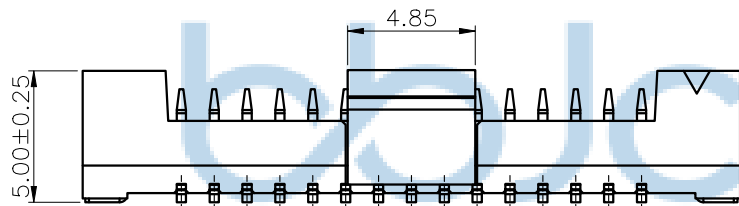

适用线路板 (PCB Layout)

技术参数：

- 1、温度范围：-25° C~+85° C.
- 2、额定电压：150V AC/DC.
- 3、额定电流：1.0A AC/DC.
- 4、接触电阻： $\leq 20\text{m}\Omega$.
- 5、绝缘电阻： $\geq 500\text{M}\Omega$.
- 6、耐电压：500V AC/min




序号	产品名称	材料规格	表面处理/颜色	数量
1	端子	黄铜	镀锡	N
2	焊片	黄铜	镀锡	2
3	胶芯	PA6T	黑色	1
4	吸取盖	LCP	黑色	1

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0456-1


深圳市步步精科技有限公司

.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$	NAME: 针座 DF-13 (1.25-2x8P) 立贴 无柱 PA6T黑色 加盖编带
APPD JM_Zheng		PJ NO: 123-254-160001-X3G
CHKD LYX		SIZE: A4 DRW NO:
DR SGF		FINISH: SEE NOTES SCALE: N/A REV: A0 UNIT: mm PAGE: 1/2

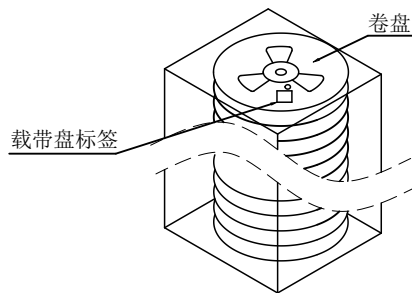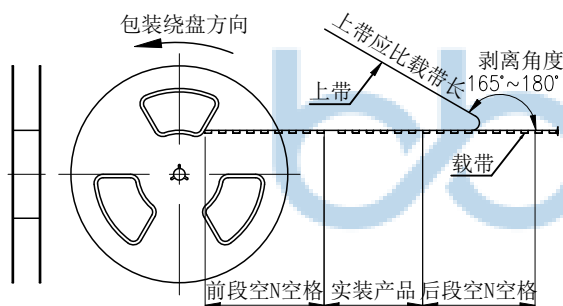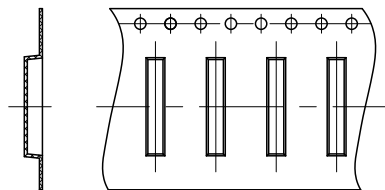

备注:

- 1、包装数量: 1000/PCS/卷, 5卷/箱。
- 2、包装袋长度: 每卷前后各空10-20个空格, 中间包装。
- 3、材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

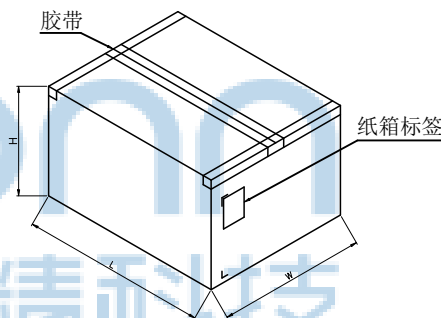

纸箱规格: W345*L345*H230MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
		.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$ X'': $\pm 2'$ X'': $\pm 1'$
APPD	JM_Zheng	NAME: 针座 DF-13 (1.25-2x8P) 立贴 无柱 PA6T黑色 加盖编带	
CHKD	LYX	PJ NO:123-254-160001-X3G SIZE:A4 DRW NO:	
PDWG NO: 0456-1		DR	SGF
		FINISH:SEE NOTES SCALE:N/A	MAT'L:SEE NOTES REV:A0 UNIT:mm PAGE:2/2