




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Wafer NylonPA66, UL94V-0
PIN Brass Tin-plated

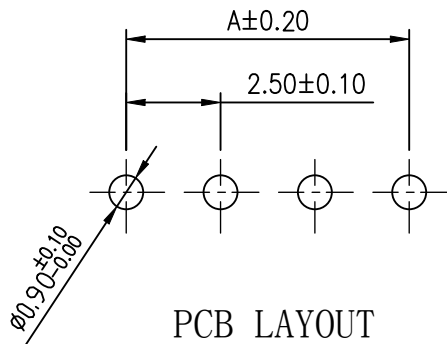

PCB LAYOUT

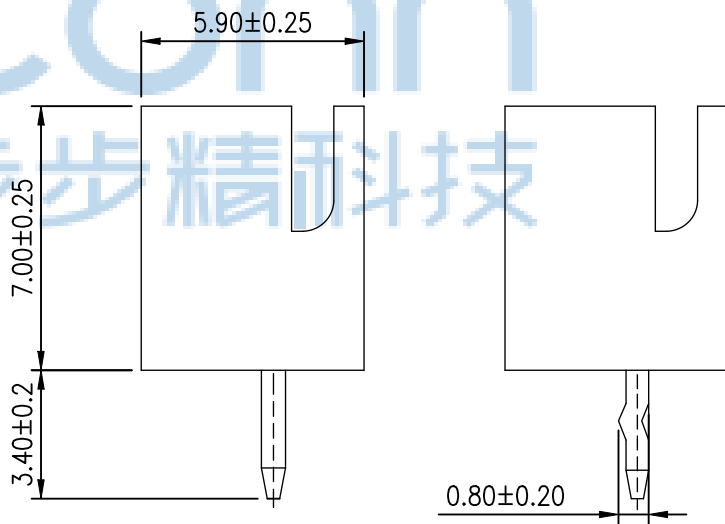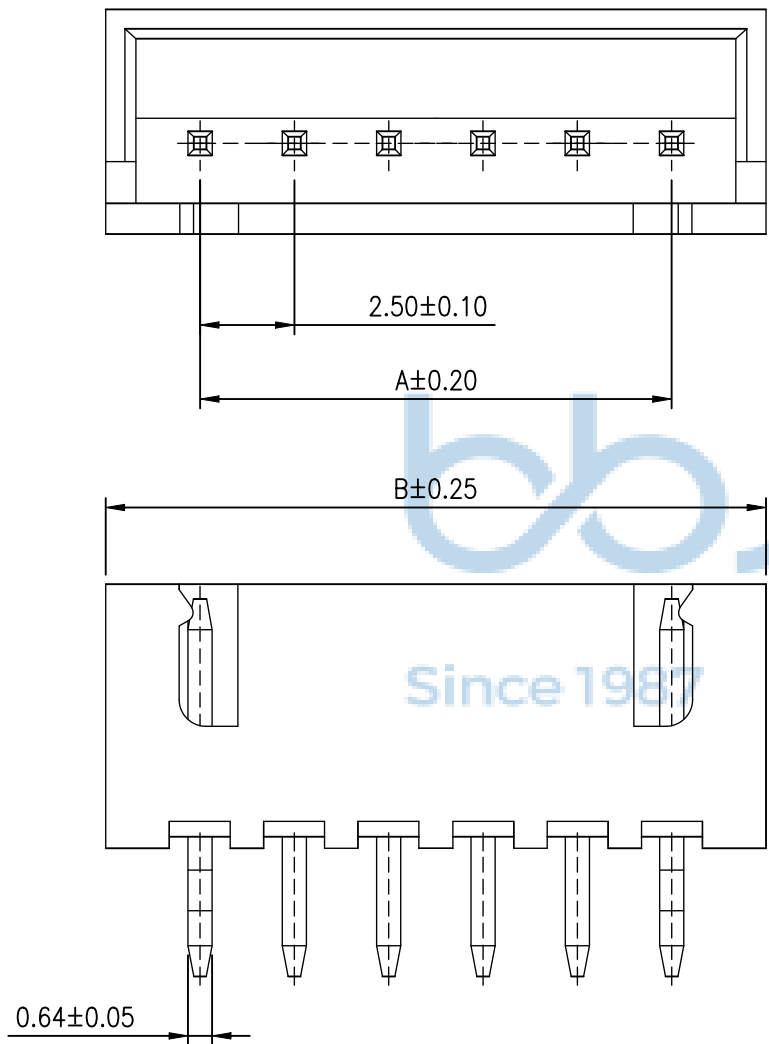

TYPE 1


TYPE 2

编号	尺寸 (mm)	
	A	B
2A	2.50	7.50
3A	5.00	10.00
4A	7.50	12.50
5A	10.00	15.00
6A	12.50	17.50
7A	15.00	20.00
8A	17.50	22.50
9A	20.00	25.00
10A	22.50	27.50
11A	25.00	30.00
12A	27.50	32.50
13A	30.00	35.00
14A	32.50	37.50
15A	35.00	40.00
16A	37.50	42.50
17A	40.00	45.00
18A	42.50	47.50
19A	45.00	50.00
20A	47.50	52.50



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0510-1		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*		NAME: 针座 XH-2A (2.50-2P) 直针 米黄色 袋装	
	APPD.	JM_Zheng			PJ. NO.: 123-295-020003-Y3G		
	CHKD.	LYX			SIZE: A4 DRW NO.:		
				FINISH: SEE NOTES		MAT'L.: SEE NOTES	
				SCALE: N/A		REV.: A0	UNIT: mm

REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	GZY

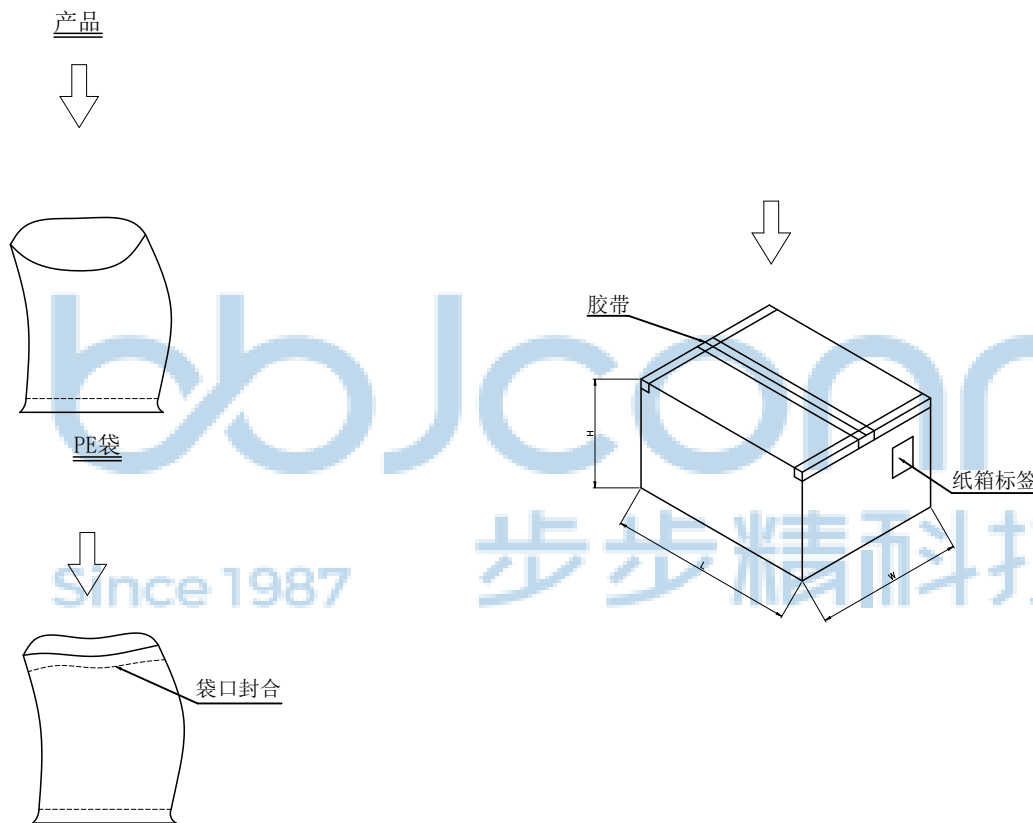

- 1、包装要求:
- 1.1 PE袋包装2000pcs;
 - 1.2 每20小袋放一个纸箱, 共计40000pcs;
 - 1.3 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$.X': $\pm 2'$.XX': $\pm 1'$	
APPD	JM_Zheng	NAME: 针座 XH-2A (2.50-2P) 直针 米黄色 袋装	
CHKD	LYX	PJ NO: 123-295-020003-Y3G	
PDWG NO:0510-1		SIZE:A4	
DR		DRW NO:	
		FINISH:SEE NOTES	
		MAT'L:SEE NOTES	
		SCALE:N/A	
		REV:A0	
		UNIT:mm	
		PAGE:2/2	