





REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

- Specification:
1. Rating : DC 24V 5A;
 2. Contact resistance: $\leq 30m\Omega$;
After test: $\leq 50m\Omega$
 3. Insulation resistance: $\geq 100M\Omega$ (500VDC);
After test: $\geq 50M\Omega$
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3N~30N;
 6. life test: 5000cycles min;
 7. Operation temperature range: -20℃~70℃
 8. Preservative temperature range: -40℃~85℃



⑥	Ground shield	1	Stainless steel	Nickel plating
⑤	Shield plate	1	Stainless steel	
④	Peg	1	Copper Alloy	Tin plating
③	Tip spring	②	Copper Alloy	Silver plating
②	Center pin	①	Zinc Alloy	Ni /CuSn Plating
①	Housing	1	PBT	Black
NO	DESCRIPTION	Q' TY	MATERIAL	REMARK

SECTION:A-A

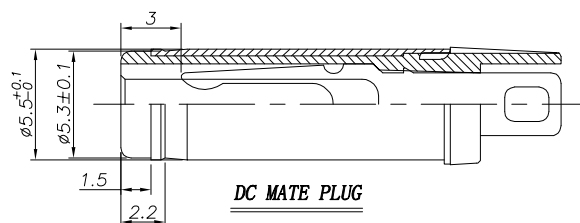

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	
DRAWN/ DATE	设计	LHC	SIZE:A4
CHECKED/ DATE	审核	LYX	UNIT:MM.
APPROVED/ DATE	核准	LJP	PART. NO: 116-305-020001-P1G


深圳市步步精科技有限公司

TITLE: DC插座 DC550250-0241-20000H 2.5针 180度 H=11.50 两脚插 带凸台


SCALE: 1:1	PROJECTION	REV.: 版本
DWG. PATH	0386-2	SHEET: 页码



PE袋规格:***X*** (以实际出货为准)

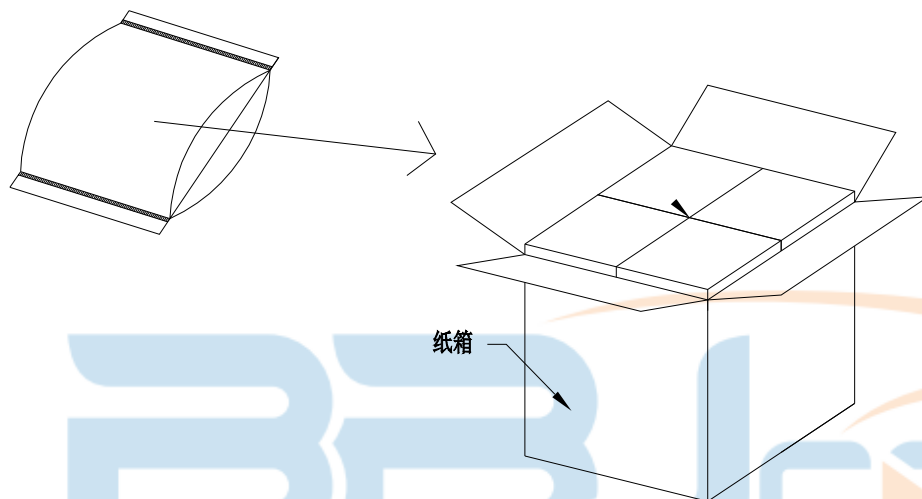

成品标签

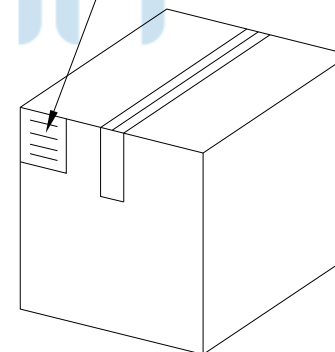

1. 包装要求:

- 1.1 每PE袋包装 500 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000PCS
- 1.4 纸箱外贴上标签

TOLERANCE UNSPECIFIED		JBS 深圳市步步精科技有限公司			
.0	±0.35				
.00	±0.25	TITLE:			
.000	±0.15	DC插座 DC550250-0241-20000H 2.5针 180度 H=11.50 两脚插 带凸台			
X.°	±2.00°	DRAWN/ DATE 设计 LHC SIZE:A4 UNIT:MM. PART.NO: 116-305-020001-P1G			
CUSTOMER DRAWING		CHECKED/ DATE 审核 LYX SCALE: 1:1 PROJECTION		REV.: 版本	
		APPROVED/ DATE 核准 LJP DWG. PATH		0386-2 SHEET: 页码	