



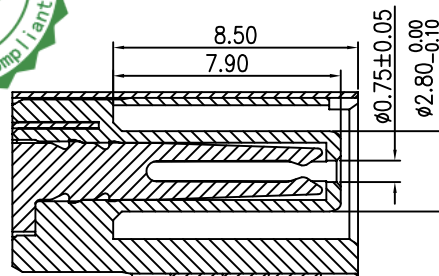






REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

SPECIFICATION:



1. RATING: DC 20V 8A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES

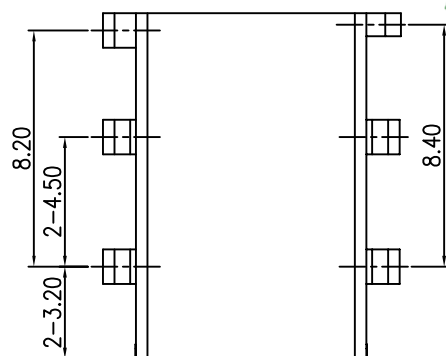

SECTION A-A

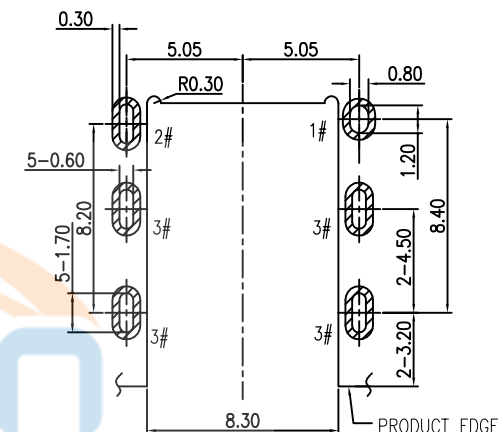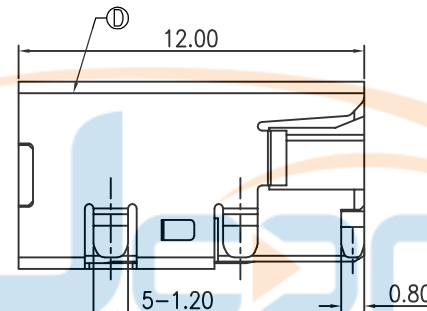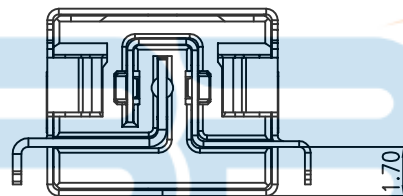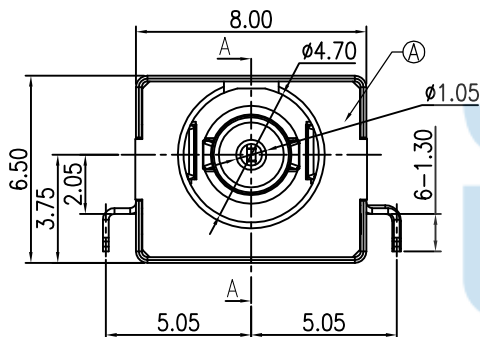

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

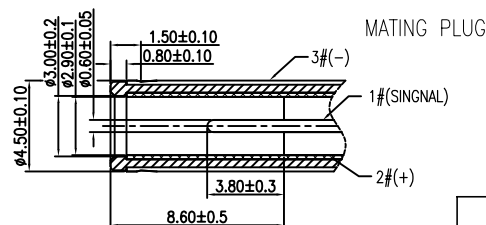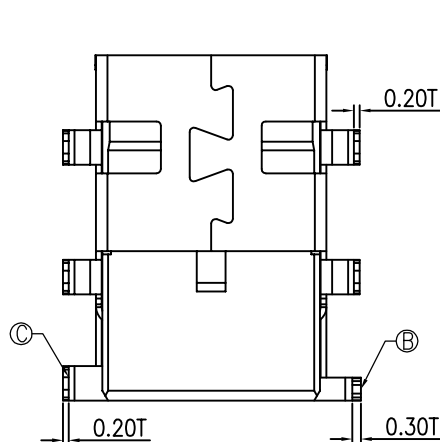

SCHEMATIC	
√	2#(+)
>	1#(SIGNAL)
^	3#(-)

D	SHELL	C5210	Ni 50u"MIN.	1
C	SPRING	C7035	GOLD FLASH/MATTE TIN 80u"/Ni 40u"	1
B	CENTER PIN	C5210	GOLD FLASH/MATTE TIN 80u"/Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

TOLERANCE UNSPECIFIED

X.	±0.50	X.	±2"
X.X	±0.30	X.X	±1"
X.XX	±0.20	X.XX	—
X.XXX	±0.10	X.XXX	—



深圳市步步精科技有限公司

TITLE:


DC450060 沉板1.7 1.0针 全铜 (8A大电流)

DRAWN/ DATE	设计	HMY	SIZE:A4	UNIT:MM.	PART. NO:	116-302-060001-P1G	REV.: 版本
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION	0386-2	SHEET: 页码	
APPROVED/ DATE	核准	LJP	DWG. PATH				




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

拉出方向

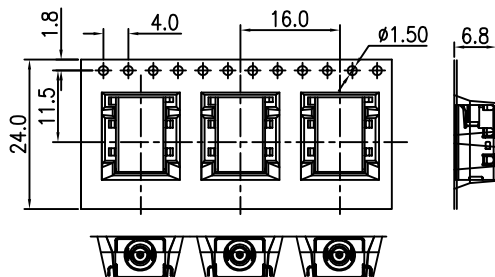


汽泡垫 2PCS




抽真空PE袋


包装盘标签




外箱, 1PCS



透明胶带




拉出方向

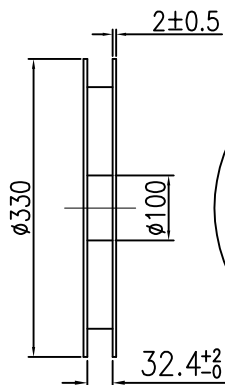

包装盘: 外径 ϕ 330; 内径 ϕ 100

覆盖带 350mm 最少

拉出方向



备注:

- 材料规格:
 - 载带: T=0.50mm, 黑色
 - 包装盘: 蓝色
 - 纸箱: L=335, W=335, H=300
- 包装数量:
500PCS/卷, 10卷(5000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°
拔离速度: 300mm/分钟



TOLERANCE UNSPECIFIED

.0	±0.35
.00	±0.25
.000	±0.15
X.°	±2.00°
CUSTOMER DRAWING	



深圳市步步精科技有限公司

TITLE: DC450060 沉板1.7 1.0针 全铜 (8A大电流)

DRAWN/ DATE	设计 HMY	SIZE: A4	UNIT: MM.	PART. NO: 116-302-060001-P1G
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0386-2	SHEET: 页码