





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

SPECIFICATION:


1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

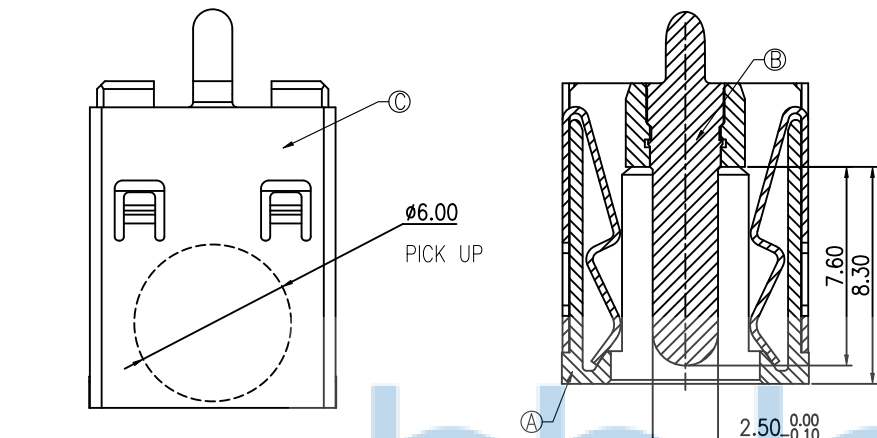


SECTION A-A

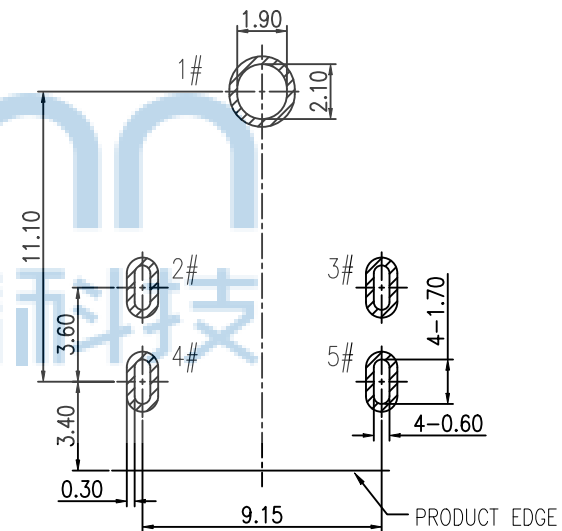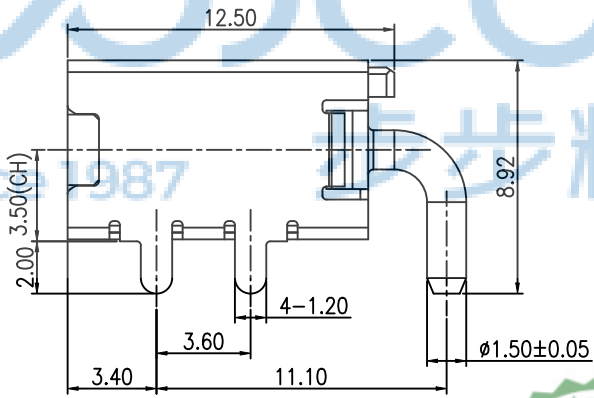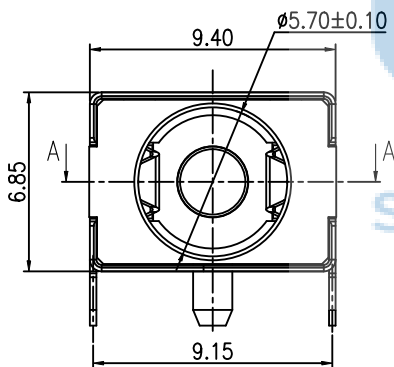

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

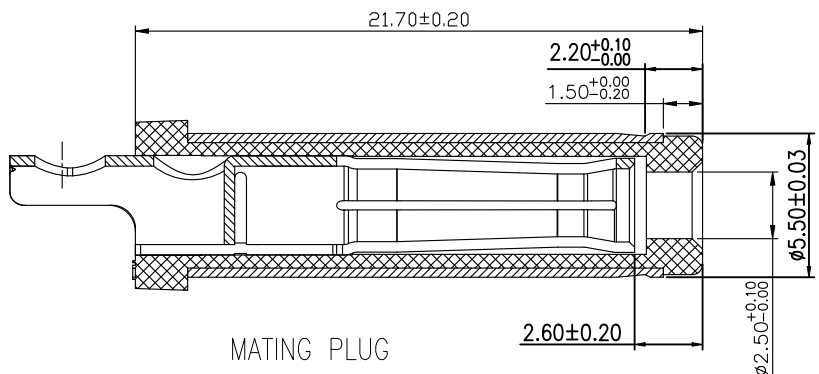

MATING PLUG



C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0386-2

APPD. JM_Zheng

CHKD. LYX

DR. SGF

深圳市步步精科技有限公司

NAME: DC插座 2.5针 90度 四脚插 L=12.5 无柱 DC30V 15A 编带

PJ. NO.: 116-302-040001-P1G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES

SCALE: N/A


MAT'L: SEE NOTES

REV.: A0

UNIT: mm


PAGE: 1/2

拉出方向


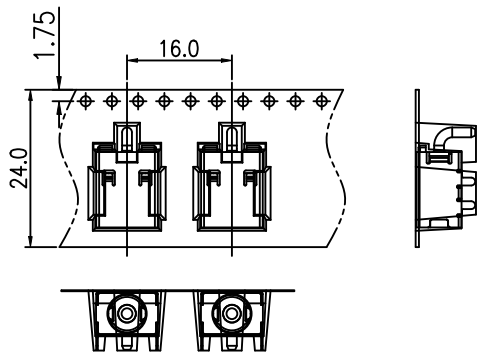


包装盘标签

外箱, 1PCS

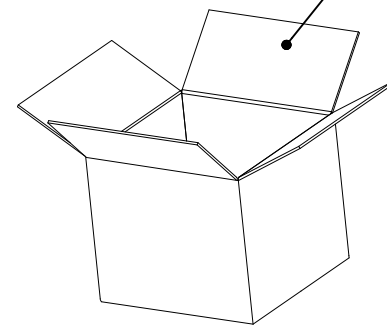

透明胶带

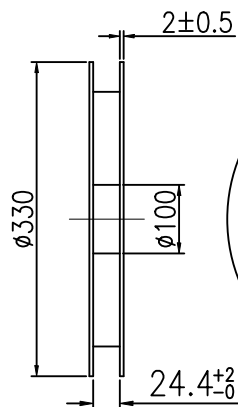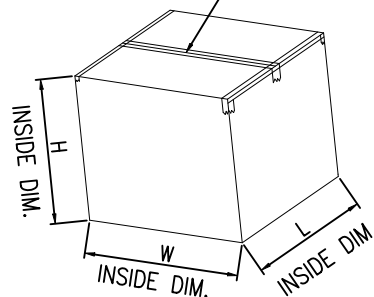


拉出方向

包装盘: 外径 $\phi 330$; 内径 $\phi 100$

总共10层

PE袋:

拉出方向



备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=300$
- 包装数量:
 - 400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ ($10\sim 70\text{gf}$);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟 .



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0386-2

深圳市步步精科技有限公司			
.X: ± 0.38	X': $\pm 3'$	NAME: DC插座 2.5针 90度 四脚插 L=12.5 无柱 DC30V 15A 编带	
.XX: ± 0.25	X': $\pm 2'$	PJ. NO.: 116-302-040001-P1G	
.XXX: ± 0.13	.XX': $\pm 1'$	SIZE: A4 DRW NO.:	
APPD. JM_Zheng	CHKD. LYX	FINISH: SEE NOTES MAT'L: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	