

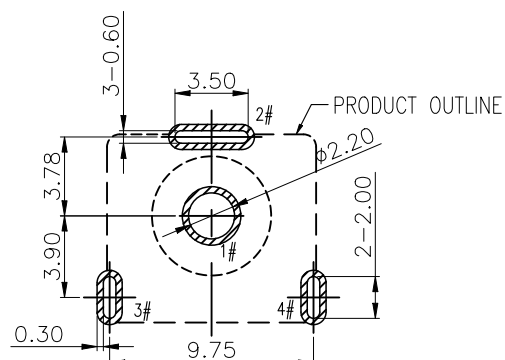


1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30mΩ MAX.(INITIAL)
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES



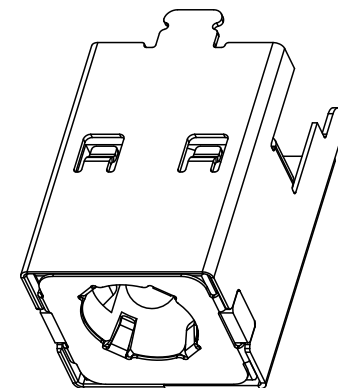


RECOMMENDED PCB LAYOUT

TOP VIEW TOLERANCE: ± 0.05

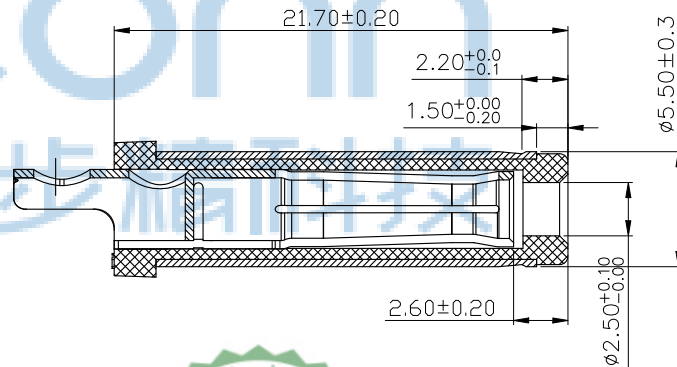

WITH CAP

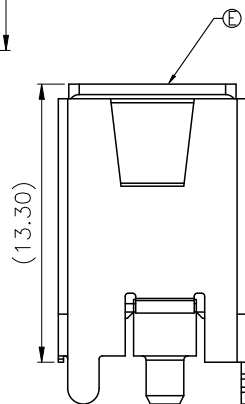

E	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0386-2

 深圳市步步精科技有限公司

.X: ± 0.38	X*: $\pm 3^*$
.XX: ± 0.25	.X*: $\pm 2^*$
.XXX: ± 0.13	.XX*: $\pm 1^*$


APPD	JM_Zheng
------	----------

CHKD	LYY
------	-----

CHRD	LTX
55	605

NAME:

DC插座 2.5针 180度 H=12.6 全铜 三脚插 编带



PJ NO: 116-305-030001-P1G

SIZE:A4	DRW NO:
---------	---------

FINISH:SEE NOTES

SEE NOTES	MAT'L:SEE NOTES
-----------	-----------------

SCALE:N/A

N/A	REV:AC
-----	--------

0	UNIT:mm	PAGE:1 / 2
---	---------	------------




SCHEMATIC







REV	ECN NO	CONTENT	DATE	ENGINEER
A0		INITIAL RELEASE	/	SGF

拉出方向

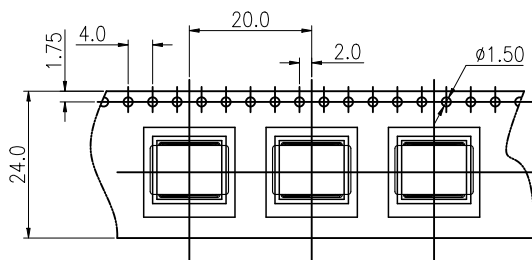


包装盘标签

拉出方向

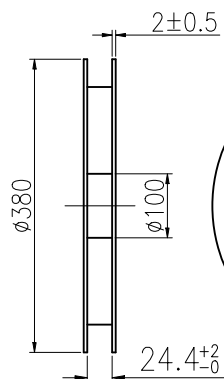

拉出方向



备注:

- 材料规格:
 - 载带:T=0.50mm
 - 包装盘:蓝色
 - 纸箱: L=385,W=385,H=380
- 包装数量:
280PCS/卷, 10卷(2800PCS)/箱
- 上盖带拨离力: 0.1N~0.7N(10~70gf);
拨离角度: 165°~180°;
拨离速度: 300mm/分钟.



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
PRIOR WRITTEN PERMISSION.

PDWG NO: 0386-2



深圳市步步精科技有限公司

.X: ±0.38 X': ±3"
.XX: ±0.25 .X': ±2"
.XXX: ±0.13 .XX': ±1"

APPD JM_Zheng

CHKD LYX

DR

NAME:
DC插座 2.5针 180度 H=12.6 全铜 三脚插 编带

PJ NO: 116-305-030001-P1G

SIZE:A4 DRW NO:

FINISH:SEE NOTES MAT'L:SEE NOTES

SCALE:N/A REV:A0 UNIT:mm PAGE:2/2