
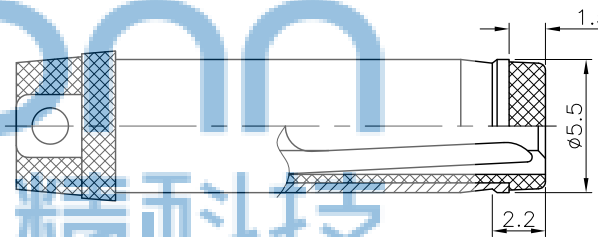
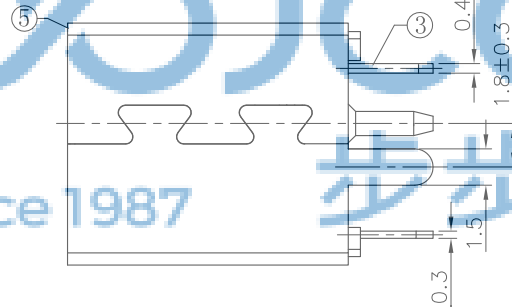
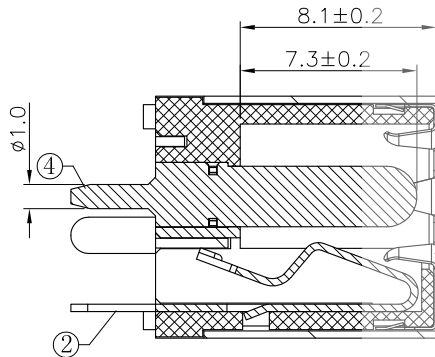

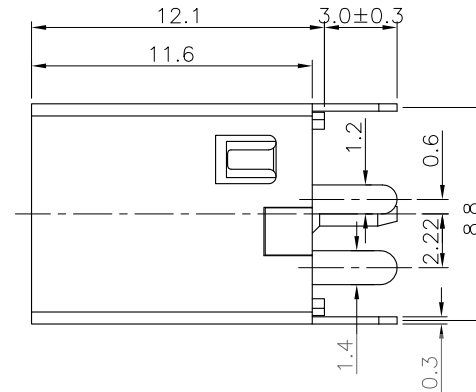


REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		


SPECIFICATION

1. Rating : DC 20V 5.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

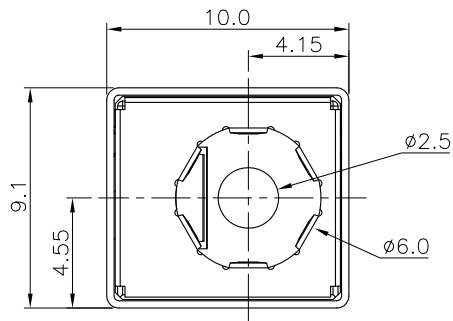


RECOMMENDED PLUG


SECTION

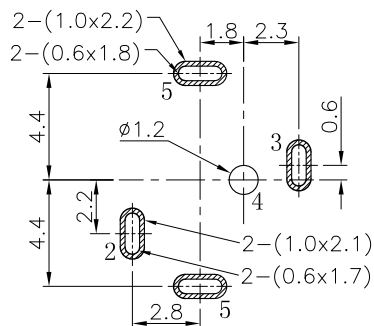

P.C.B LAYOUT
TOP VIEW




SCHEMATIC




6	COAT	1	SUS301	N/A
5	SHELL	1	SPCC	Ni-Plating
4	PIN	1	BRASS	Ni-Plating
3	CONTACT FOOT	1	BRASS	Ag-Plating
2	SPRING PIECE	1	BRONZE	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司			
.0 ±0.35 .00 ±0.25 .000 ±0.15 X. ° ±2.00° CUSTOMER DRAWING		TITLE: DC插座 2.5针 四脚插 全铜 铁壳 180度 H=12.10 (DC550250-0760-20000H)			
DRAWN/ DATE	设计 TSP	SIZE:A4	UNIT:MM.	PART.NO: 116-305-040001-P1G	
CHECKED/ DATE	审核 LYX	SCALE: 1:1		PROJECTION 	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH		0386-2	SHEET: 页码




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		



单重:2.5g

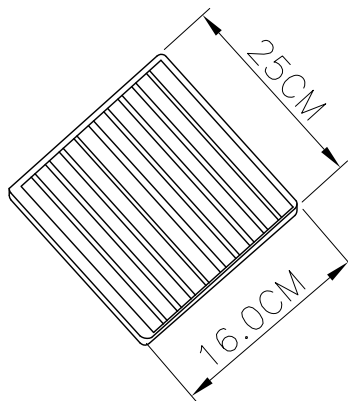

吸塑盒:140 PCS/盘

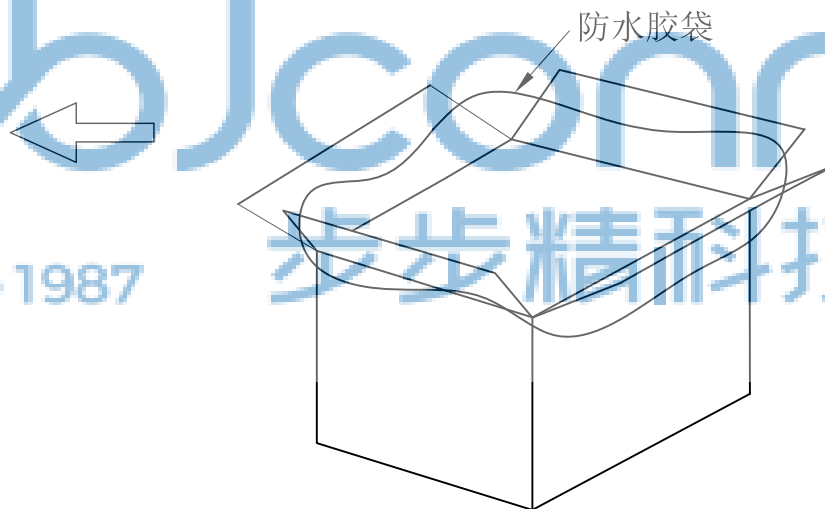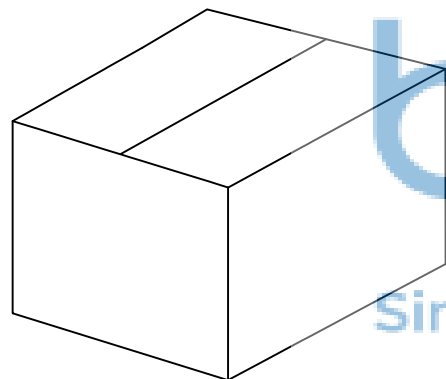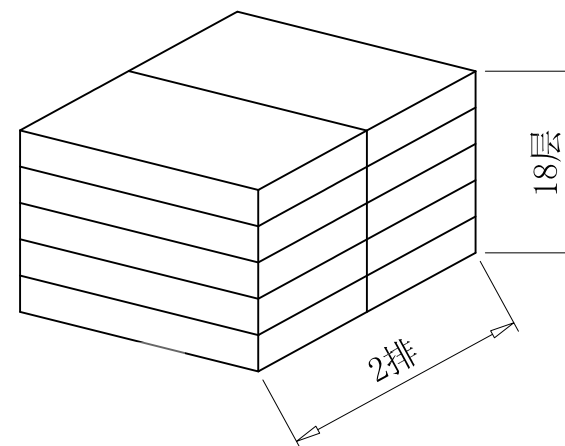

纸箱尺寸: 34*28*20.5 cm

数量: 5040 PCS

净重: 12.6 KG

毛重: 14.7 KG



TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司			
.0	±0.35				
.00	±0.25				
.000	±0.15				
X.°	±2.00°				
CUSTOMER DRAWING		TITLE:			
		DC插座 2.5针 四脚插 全铜 铁壳 180度 H=12.10 (DC550250-0760-20000H)			
DRAWN/ DATE	设计 TSP	SIZE:A4	UNIT:MM.	PART. NO: 116-305-040001-P1G	
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0386-2	SHEET: 页码	