

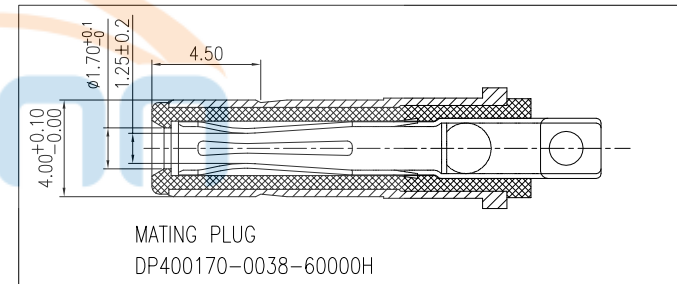
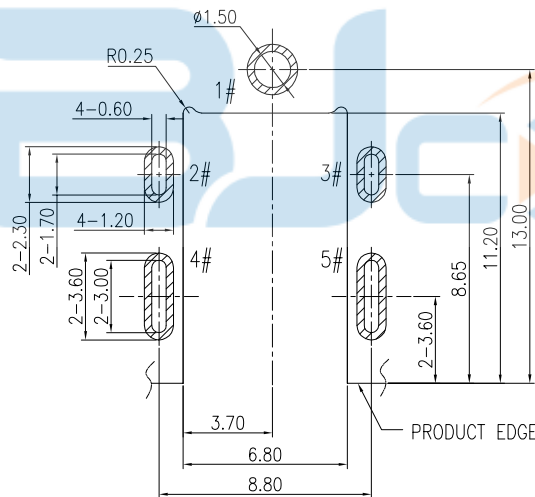


SPECIFICATION:


1. RATING: DC 20V 8A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES



MATING PLUG
DP400170-0038-60000H

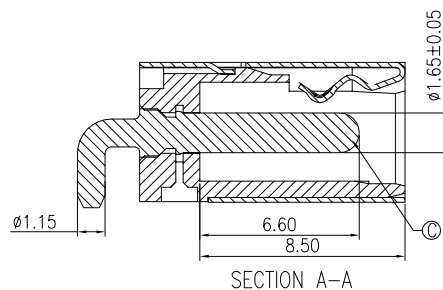

RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE: ±0.05




C	CENTER PIN	BRASS	GOLD FLASH/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DECIMALS:		ANGLES:		深圳市步步精科技有限公司			
DIM	TOL	DIM	TOL				
X.	±0.50	X.	±2°	TITLE: DC插座 DC400170-0985-30000H 1.65针 全铜 四脚插 沉板1.38 L=11.0 CH=1.50 带弯针 LCP黑胶 DC20V 8A			
X.X	±0.30	X.X	±1°				
X.XX	±0.20	X.XX	—				
X.XXX	±0.10	X.XXX	—				
DRAWN/ DATE	设计	LHC	SIZE:A4	UNIT:MM.	PART. NO: 116-309-040003-P1G		
CHECKED/ DATE	审核	LYX	SCALE: 1:1		PROJECTION		REV.: 版本
APPROVED/ DATE	核准	LJP	DWG.	PATH	0386-2		SHEET: 页码



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

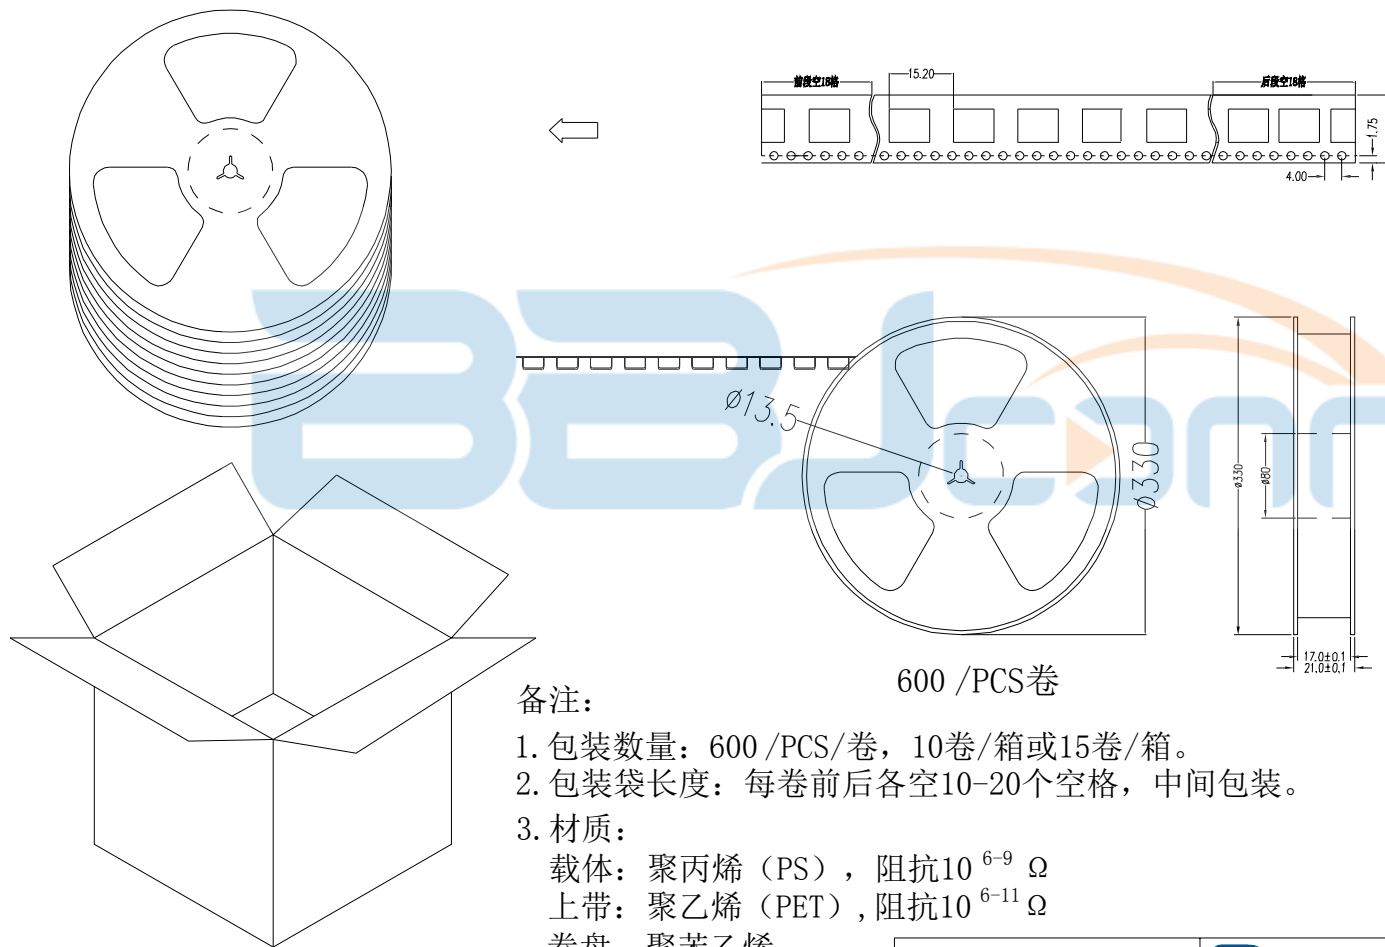

备注:

1. 包装数量: 600 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司			
.0	±0.35				
.00	±0.25	TITLE: DC插座 DC400170-0985-30000H 1.65针 全铜 四脚插 沉板1.38 L=11.0 CH=1.50 带弯针 LCP黑胶 DC20V 8A			
.000	±0.15	SIZE: A4	UNIT: MM.	PART. NO: 116-309-040003-P1G	
X.°	±2.00°	CHECKED/ DATE	SCALE: 1:1	PROJECTION	REV.: 版本
CUSTOMER DRAWING		APPROVED/ DATE	DWG. PATH	0386-2	SHEET: 页码
DRAWN/ DATE	设计 LHC	CHECKED/ DATE	审核 LYX	DWG. PATH	
		APPROVED/ DATE	核准 LJP		